




# SLNC新型单级离心泵

SLNC NEW TYPE SINGLE-STAGE CENTRIFUGAL PUMP

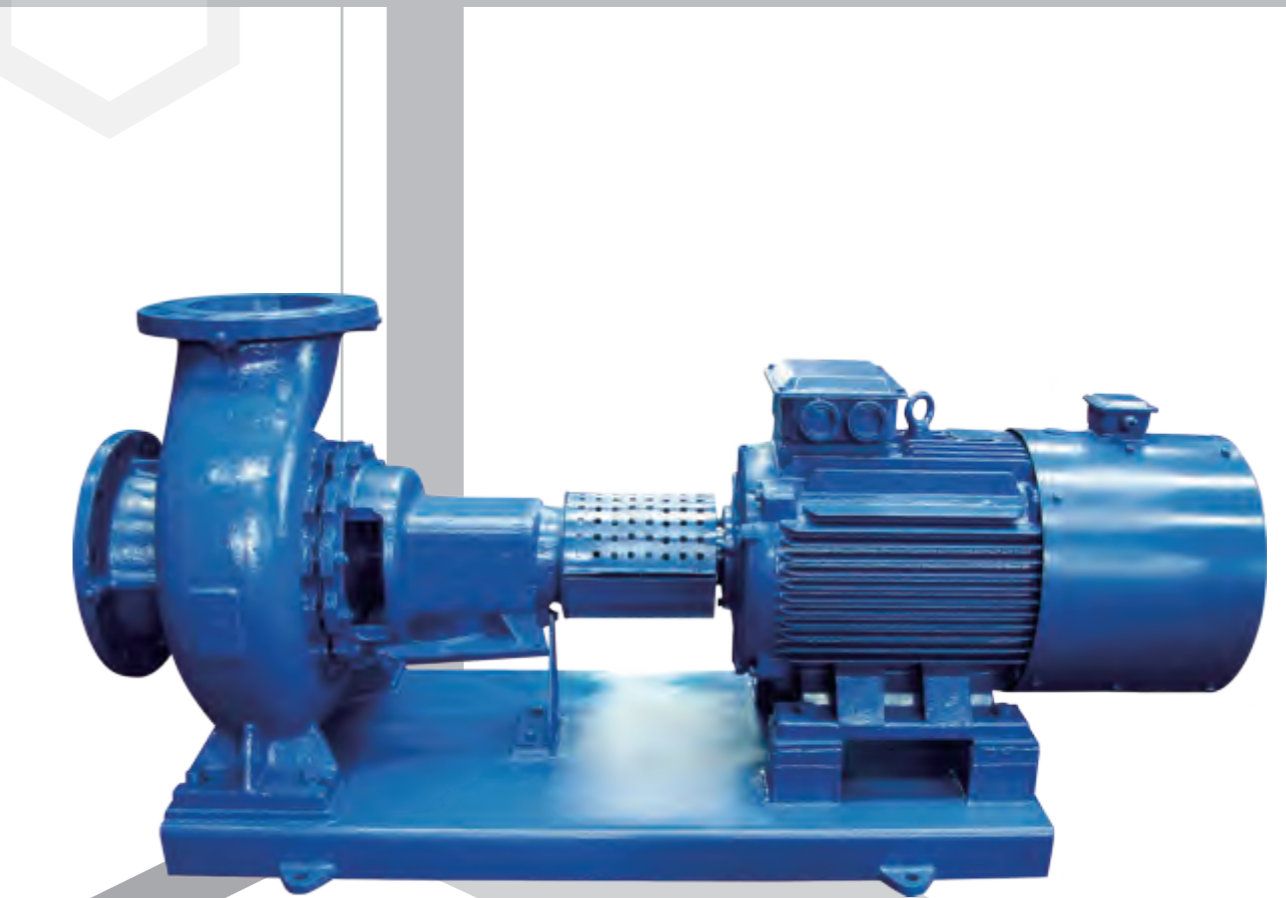

**上海连成（集团）有限公司**  
SHANGHAI LIANCHENG (GROUP) CO., LTD.

地址：上海市江桥镇曹安公路3616-3618号  
邮编：201812  
总机：(021) 59138888  
传真：(021) 59136782  
800免费咨询电话：800-820-5009  
400免费客服电话：400-188-3339

Address: 3616-3618 Cao'an Road, Jiangqiao Shanghai  
P.C.: 201812  
Switchboard: (021) 59138888  
Fax: (021) 59136782  
800 Free consultation Tel: 800-820-5009  
400 Free service Tel: 400-188-3339



连成集团微信订阅号





## 集团介绍

上海连成(集团)有限公司，是一家国内著名的研究制造泵、阀和流体输送系统、电气控制系统和环保设备的多元化经营的大型集团企业。

经过二十多年的发展，现已拥有五大工业园区，分布于上海、江苏、大连和浙江等经济发达地区，总占地面积达55万平方米，总部设在上海封浜工业园区。旗下拥有上海连成泵业制造有限公司、上海连成电机有限公司、上海连成阀门有限公司、上海连成集团物流有限公司、上海连成集团通用设备安装工程、上海阿美泰克工业设备有限公司、上海连成环境工程设备有限公司、上海连成集团苏州股份有限公司、上海连成（集团）大连化工泵制造有限公司等多家全资子公司及控股公司，注册资金达6.5亿元以上，总资产达数十亿元。产品品种现已达五千多种，涵盖水泵、电机、电气柜、阀门、成套设备、环保设备、换热器、机械配件等系列，其产品性价比合理，质量可靠，广泛应用于市政、水利、建筑、消防、电力、环保、石油、化工、矿业、医药等领域。集团销售业绩每年均为行业前茅。

## 强大的制造实力

集团公司目前拥有国家“1级”水泵测试中心、三坐标测量仪、动静平衡测量仪、便携式光谱仪、激光快速成型仪、多功能抛丸机、自动氩弧焊机、10米大型立车、大型磨床、数控机床集群等各种国内外先进的生产检测设备2000台套以上。现有员工3000余人，大中专生占72.6%，其中中级职

## Group Introduction

Shanghai Liancheng (Group) Co., Ltd. is a well-known large-scale group enterprise that dedicates to diversified operations of researching and manufacturing pumps, valves and fluid delivery systems, electrical control systems and environmental protection equipment.

After more than 20 years of development, the Group now has five industrial parks, which are located in economically developed areas such as Shanghai, Jiangsu, Dalian and Zhejiang, with a total area of 550,000 square meters. The headquarters is located in Shanghai Fengbang Industrial Park. The Group owns a number of wholly-owned subsidiaries and holding companies such as Shanghai Liancheng Pump Manufacturing Co., Ltd., Shanghai Liancheng Motor Co., Ltd., Shanghai Liancheng Valve Co., Ltd., Shanghai Liancheng Group Logistics Co., Ltd., Shanghai Liancheng Group General Equipment Installation Engineering, Shanghai Amtech Industrial Equipment Co., Ltd., Shanghai Liancheng Environmental Engineering Equipment Co., Ltd., Shanghai Liancheng Group Suzhou Co., Ltd., Shanghai Liancheng (Group) Dalian Chemical Pump Manufacturing Co., Ltd., with a registered capital of more than 650 million yuan and total assets of 2 billion yuan. The Group's product variety has now reached more than 5,000, covering pumps, motors, electrical cabinets, valves, complete sets of equipment, environmental protection equipment, heat exchangers, mechanical parts and other series. Moreover, these products are reasonable in price and reliable in quality, and are widely used in municipal, water conservancy, construction, fire protection, electric power, environmental protection, petroleum, chemical, mining, pharmaceutical and other fields. The Group's sales performance is among the best in the industry every year.

## Strong Manufacturing Strength

The Group Company currently has more than 2,000 sets of advanced domestic and overseas production and testing equipment, such as the national "Grade 1" pump test center, trilinear coordinates measuring instrument, dynamic and static balance measuring instrument, portable spectrometer, laser rapid prototyping instrument, multi-

# 企业简介 CORPORATION OUTLINE

称者475人、高级职称者78人、国家级专家19人、教授6人。每年都投入大量资金用于技术研发和创新，并通过SLOIDWORKS软件，对产品进行CFD分析和强度计算。公司持有国家专利技术近达600余项，每年均参与大量的国家及行业标准起草及编写工作，涉及水利、化工、消防、城市供水等各领域产品及技术标准累计达数十项。集团建有完善的销售服务网络，设有30余家分公司及200多个分支机构，拥有一支1800多人的专业销售服务队伍，为广大客户提供专业的技术支持与优良的营销服务。

## 荣誉加身，成就更好连成

集团通过了ISO9001、ISO14001、OHSAS18001等国际管理体系认证，全面推行ERP、CRM信息化管理平台；先后获得国家和行业颁发的工业、消防、煤矿、石油化工等重要领域的工业产品生产许可证、“安全生产许可证”、CCC中国国家强制性产品认证、CQC产品认证、CE认证、卫生许可批件、MA煤安认证、节能认证、节水认证、测量管理体系认证、采用国际标准认证、进出口企业资格等生产经营资质；并获得了“国家科学技术进步二等奖”、“大禹水利科学技术一等奖”、“国家级创新型”、“高新技术企业”、“中国驰名商标”、“国家标准起草单位”、“国家首批水泵节能认证通过企业”、“全国商品售后服务认证（五星级）”、“上海市级企业技术中心”、“上海市知识产权示范企业”、“上海市名牌产品”、“上海市民营制造业百强”、“中国水工业十大民族品牌”、“全国实施用户满意产品”等众多的社会荣誉。

## 连成产品得到国内外的用户认可

随着连成集团的永续经营，连成产品得到了用户广泛认可，目前拥有：国家体育场“鸟巢”、国家大剧院、上海世博工程、首都机场、广州白云机场、青岛国际机场、上海地铁、西安地铁、沈阳地铁、首钢京唐、首钢滦南马城矿业、霍州煤电、葫芦岛铝业、广州自来水厂、禹门口水利、松江区二次供水改造、香港供水工程深圳沙湾泵站、澳门供水工程珠海平岗泵站、黄河灌溉山西夹马口泵站、山西省西苑泵站、广东云安六都泵站、长垣县浦西区雨水泵站、渭南东雷二期抽黄灌区泵站改造、黄河小浪底水利工程、宁夏扬黄灌溉工程、鄂尔多斯城市饮用水工程、秦山核电、岭奥核电、国电集团、大唐电厂、华能电厂、宝钢、首钢、唐钢、太钢、鞍钢、新疆八一钢铁、大庆油田、胜利油田、中石油、中石化、中海油、青海盐湖钾盐项目、山西焦化、潞安矿业、陕西咸阳化工、中海油惠州炼油项目、清华大学、海尔集团和安哥拉农业排灌工程、缅甸国家农业灌溉项目，以及核电、火电、水电、钢铁、油田、焦化、矿业、化工、炼油等一大批国内、外样板工程。在通用、拜耳、西门子、大众、可口可乐等国际知名企业在中国的工程均采用了连成集团的产品。

## 百年连成、我们在行动

连成集团矢志于打造世界级流体处理工业企业，秉承永远珍惜人与自然和谐关系、为提高人类生活质量不懈努力的宗旨，为实现“百年连成”远大目标，一直致力于环保型、节能型产品的研发与制造，为民族企业的振兴与发展不懈努力！

水，因连成至高致远……！



中国驰名商标



上海市著名商标



国家级创新型企

n shot blasting machine, automatic argon arc welding machine, 10 m large vertical car, large grinding machine, and CNC machine tool cluster. The Group has more than 3,000 employees, of which 72.6% are graduates of technical secondary school and junior college, and there are 475 middle-level titles, 78 senior titles, 19 national experts, and 6 professors. Every year, the Company invests a large amount of money in technology research and development and innovation, and carries out CFD analysis and intensity calculation of products through SLOIDWORKS software. The Company holds nearly 600 national patent technologies, and participates in the drafting and preparation of a large number of national and industry standards every year, involving over 20 products and technical standards in various fields such as water conservancy, chemical industry, fire protection and urban water supply. The Group has established a comprehensive sales service network, with more than 30 branch companies and over 200 affiliated agencies, and has a professional sales service team surpassing 1,800 people, providing professional technical support and excellent marketing services for customers.

## Honored to Achieve Better Liancheng

The Group has passed ISO9001, ISO14001, OHSAS18001 and other international management system certifications, and fully implemented ERP and CRM information management platform. The Group has obtained national and industrial production licenses for industrial products in important fields such as industry, fire protection, coal mining and petrochemical industry, "Safe Production License", CCC China National Compulsory Product Certification, CQC Product Certification, CE Certification, Health Permit Approval, MA Coal Safety Certification, Energy Conservation Certification, Water Saving Certification, Measurement Management System Certification, International Standard Certification, Qualification of Import and Export Enterprise, and other production and operation qualifications. The Group has also been entitled with multiple social honors such as "National Science and Technology Progress Second Prize", "Dayu Water Conservancy Science and Technology First Prize", "National Innovation Enterprise", "High-tech Enterprise", "China Well-known Trademark", "National Standards Drafting Unit", "National First Batch of Enterprises Qualified for Water Pump Energy-Saving Certifications", "National Commodity After-sales Service Certification (Five-star)", "Shanghai Municipal Level Enterprise Technology Center", "Shanghai Intellectual Property Demonstration Enterprise", "Shanghai Famous Brand Products", "Top 100 Private Manufacturing Industries in Shanghai", "Top Ten National Brands of China Water Industry", "National Implementation of Customer Satisfaction Products".

## Liancheng products are recognized by users at home and abroad

With the continuous operation of Liancheng Group, Liancheng products have been widely recognized by users and its projects range is as follows: National Stadium "Bird's Nest", National Grand Theatre, Shanghai World Expo Project, Capital Airport, Guangzhou Baiyun Airport, Qingdao International Airport, Shanghai Subway, Xi'an Subway, Shenyang Subway, Shougang Jingtang, Shougang Luannan Macheng Mining, Huozhou Coal and Electricity, Huludao Aluminum, Guangzhou Waterworks, Yumenkou Water Conservancy, Songjiang District Secondary Water Supply Reform, Hong Kong Water Supply Project Shenzhen Shawan Pumping Station, Macao Water Supply Project Zhuhai Pinggang Pumping Station, Yellow River Irrigation Shanxi Jiamakou Pumping Station, Shanxi Xifan Pumping Station, Guangdong Yun'an Liudu Pumping Station, Changyuan County Puxi District Rainwater Pumping Station, reconstruction of pumping station in the second phase of the Yellow River irrigation area in Weinan Donglei, Yellow River Xiaolangdi Water Conservancy Project, Ningxia Yellow River Irrigation Project, Ordos City Drinking Water Project, Qinshan Nuclear Power, Ling'ao Nuclear Power, Guodian Group, Datang Power Plant, Huaneng Power Plant, Baosteel, Shougang, Tangsteel, Taiyuan steel, Ansteel, Xinjiang Bayi Steel, Daqing Oilfield, Shengli Oilfield, PetroChina, Sinopec, CNOOC, Qinghai Salt Lake Sylvite Project, Shanxi Coking, Lu'an Mining, Shaanxi Xianyang Chemical, CNOOC Huizhou Refining Project, Tsinghua University, Haier Group and Angola Agricultural Drainage Project, Myanmar National Agricultural Irrigation Project, and a large number of domestic and foreign model projects such as nuclear power, thermal power, hydropower, steel, oil fields, coking, mining, chemical, and oil refining. Liancheng Group's products are used in projects in China by GM, Bayer, Siemens, Volkswagen, Coca-Cola and other internationally renowned companies.

## Centurial Liancheng in Action

In order to build the world's top fluid processing industrial enterprise, adhere to cherishing the harmonious relationship between man and nature forever, improve the quality of human life, and achieve the goal of "Centurial Liancheng", Liancheng has been committed to the development and manufacture of environmentally friendly and energy-saving products, and has been making unremitting efforts for the revitalization and development of national enterprises! Water reveals its holiness through Liancheng's endeavor...!



# 目 录

## CONTENTS

<b>概 述</b> Outline	1
<b>产品特点</b> Product features	1
<b>工作条件</b> The working conditions	2
<b>型号意义</b> Model meaning	2
<b>主要用途</b> The main purpose	2
<b>结构说明</b> About the structure	3
<b>型谱图</b> Spectrum diagram	4
<b>性能参数表</b> Performance parameters of the table	5
<b>性能曲线图</b> Performance curve	23
<b>安装尺寸图</b> Installation dimension drawing	40
<b>安装尺寸表</b> Installation dimension table	41

## 概 述 Outline

SLNC系列单级单吸悬臂式离心泵参照国外知名厂家卧式离心泵，符合ISO2858要求，其性能参数是由原IS及SLW型清水离心泵性能参数优化、扩展而成，其内部结构、整体外观是集成原IS型清水离心泵及现有SLW卧式泵、悬臂式泵的优点设计而成，使其不论性能参数还是内部结构以及整体外观都更趋于合理、可靠。

产品严格按照有关要求组织生产，产品质量稳定，性能可靠，供输送清水或物理化学性质类似于清水且不含固体颗粒的液体之用。

该系列泵流量范围15-2000m<sup>3</sup>/h，扬程范围10-140m，通过切割叶轮和调整转速可以获得近200种型号的产品，能适应各行各业的输水需求，按转速可分为2950r/min、1480r/min以及980r/min，按叶轮的切割型式可分基本型、A型、B型、C型、D型。

SLNC series single-stage single-suction cantilever centrifugal pump with reference to foreign famous manufacturer horizontal centrifugal pump, conform to the requirements of the ISO2858, its performance parameters are from the original IS, says Mr Galdi at SLW type centrifugal water pump performance parameters optimization, expand and become, its internal structure, the overall appearance IS integrated the original type IS water centrifugal pump and the advantages of existing says Mr Galdi at SLW horizontal pump, cantilever type pump design, make its performance parameters and the internal structure and overall appearance are tend to be more reasonable and reliable.

Manufactured products in strict accordance with the relevant requirements, product quality is stable and reliable performance, for the transport of water and physical and chemical properties similar to water without solid particles in the liquid with.

This series of pump flow range 15-2000m<sup>3</sup>/h, 10-140m lift range, and adjust the rotation speed can be obtained by cutting impeller of nearly 200 types of products, can adapt to all walks of life water demand, according to the rotation speed can be divided into 2950r/min, 1480r/min and 980r/min, press the impeller cutting pattern can be divided into basic, type A, type B, type C and type D.

## 产品特点 Product features

- 1、结构紧凑。该系列泵为卧式结构，外形美观，占地面积少。
- 2、运行平稳、噪音低、组件同心度高。泵和电机采用联轴器连接，叶轮具有良好的动静平衡，运行时振动小，改善了使用环境。
- 3、无渗漏。轴封采用耐腐蚀硬质合金机械密封。
- 4、维修方便。该系列卧式泵为后开门式结构，无须拆卸管路，即可进行检修。


1. Compact structure. This series of pump is horizontal structure, beautiful shape, covering an area of less.
2. Smooth running, low noise, high concentricity components. Connected by coupling pump and motor, impeller has good dynamic and static balance, little vibration when running, improving the use environment.
3. No leakage. Shaft sealing adopts corrosion-resistant carbide mechanical seal.
4. Easy maintenance. After this series of horizontal pump is open type structure, do not need to remove the line, can be for maintenance.

## 工作条件 The working conditions

- 1、泵最大工作压力（最大允许进口压力+泵设计压力）<1.6MPa，订货请注明系统工作压力；  
最大允许进口压力0.4MPa；
- 2、适应介质：清水介质应无腐蚀性液体、介质固体不容物，其体积不超过单位体积的0.1%，粒度<0.2mm，如介质为带有细小颗粒的请在订货时说明；
- 3、周围环境温度不超过40℃，相对湿度不超过95%；
- 4、从电机端看，泵的旋转方向为顺时针方向旋转（CW）。

1. The maximum working pressure of pump (maximum allowable inlet pressure + pump design pressure) <1.6MPa, ordering please specify the system working pressure;  
Maximum allowable inlet pressure 0.4MPa;
2. Adapt to the media: the water medium should be no corrosive liquid, medium solids can not be, its volume is not more than 0.1% per unit volume, particle size less than 0.2mm, such as the medium for the small particles in the order;
3. The ambient temperature not exceeding 40℃, relative humidity of not more than 95%;
4. From the motor side, the rotation direction of the pump is clockwise rotation (CW).

## 型号意义 Model meaning

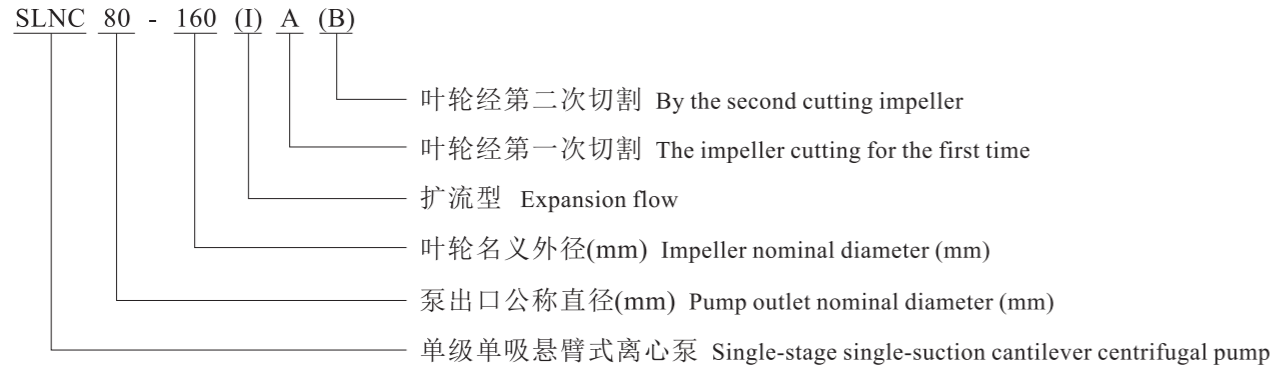

## 主要用途 The main purpose


SLNC单级单吸悬臂式离心泵，供输送清水或物理化学性质类似于清水且不含固体颗粒的液体之用。使用介质温度不超过100℃，适用于工业和城市给排水、高层建筑增压送水、园林喷灌、消防增压、远距离输水、采暖、浴室冷热水循环增压及设备配套等。

SLNC single-stage single-suction cantilever centrifugal pump, for the transport of water and physical and chemical properties similar to water without solid particles in the liquid with. Use of medium temperature does not exceed 100℃, applicable to industrial and urban water supply and drainage, pressurized water supply in high-rise building, garden sprinkler irrigation, fire pressurization, long distance water supply, cold and hot water circulation pressurization in heating, bathrooms and form a complete set of equipment, etc.

## 结构说明 About the structure

结构见下图。该泵由泵体、叶轮、泵盖、悬架体和轴等零件组成。泵为单级单吸卧式悬臂式离心泵，泵体和泵盖两部分是从叶轮背面处剖分的，即为后开门结构形式。大多数泵的叶轮前、后均设有密封环，并在叶轮后盖板上设有平衡孔，以平衡作用在转子上的轴向力。深沟球轴承承受泵的径向力和残余轴向力。传动方式可用弹性柱销联轴器，也可采用带有中间联的膜片联轴器。轴封采用知名厂家机械密封，以满足客户的使用要求。




See image below. The pump by the pump body, impeller, pump cover, such as suspension body and shaft parts. Pump for single-stage single-suction horizontal cantilever type centrifugal pump, the pump body and pump cover two parts from dissection of the impeller, which open the door for the structure. Before and after there are most of the pump impeller sealing ring, and is equipped with balance on impeller back cover hole, in order to balance the axial force on the rotor. Deep groove ball bearing radial force and residual axial force of pump. Available elastic dowel pin shaft coupling transmission way, also can be used with the diaphragm coupling of intermediate link. Shaft sealing adopts mechanical seal famous manufacturer, to meet customer demand.

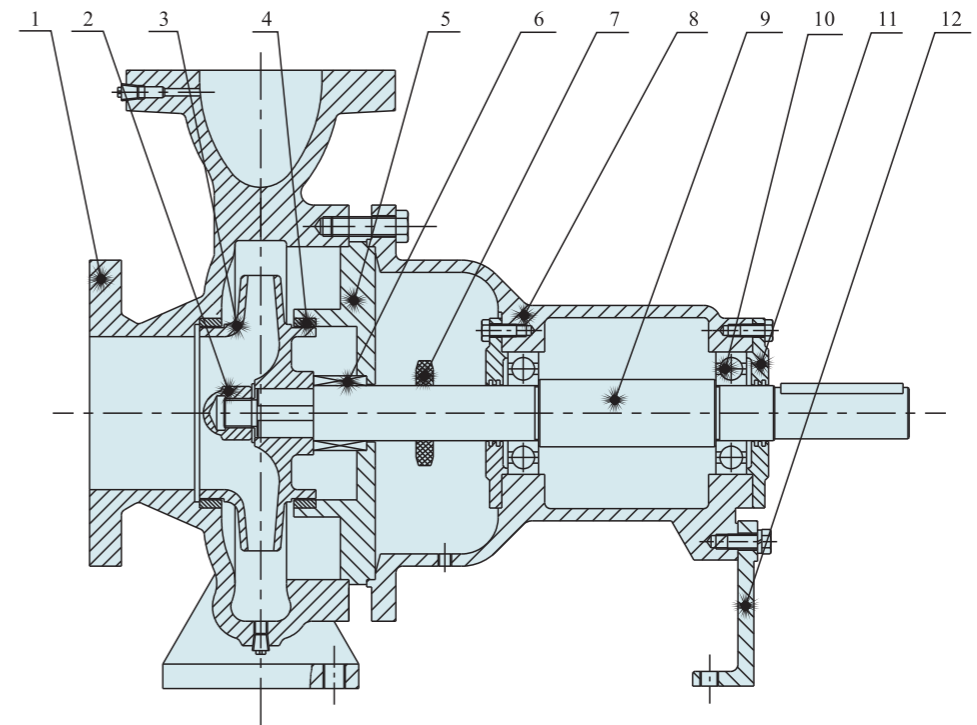

序号 No	名称 Name	常规材质 Conventional material	序号 No	名称 Name	常规材质 Conventional material	序号 No	名称 Name	常规材质 Conventional material
1	泵体 Pump body	HT200	5	泵盖 Pump cover	HT200	9	轴 Shaft	2Cr13
2	叶轮螺母 The impeller nut	45	6	机械密封 Mechanical seal	石墨-碳化钨 Graphite and tungsten carbide	10	滚动轴承 Rolling bearing	
3	叶轮 The impeller	HT200	7	挡水圈 Against hydrosphere	丁腈橡胶 Nitrile butadiene rubber	11	轴承压盖 Bearing gland	HT200
4	密封环 Sealing ring	HT200	8	悬架体 The suspension body	HT200	12	悬架支架 Suspension bracket	HT200



型谱图 Spectrum diagram

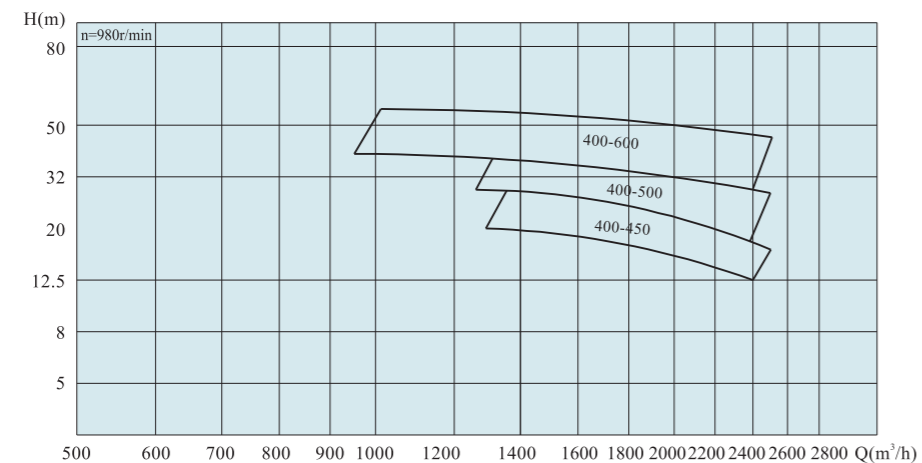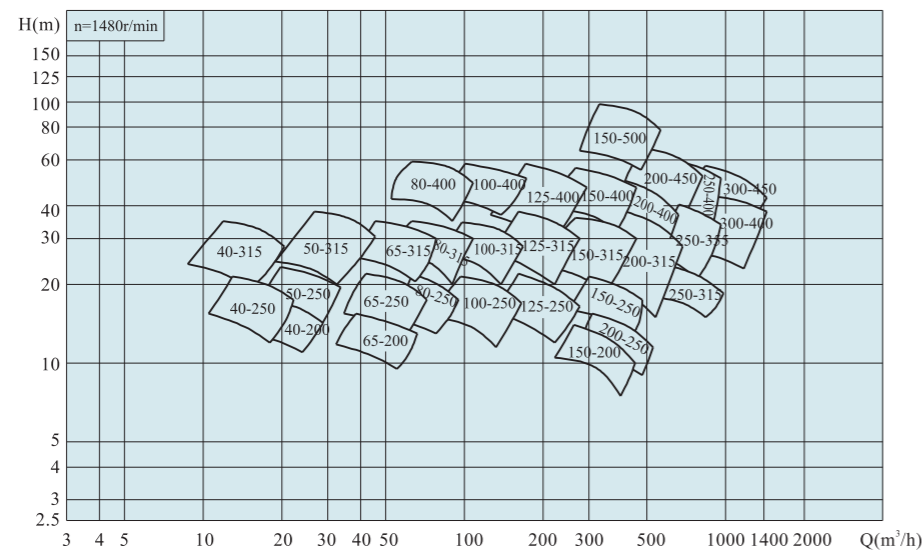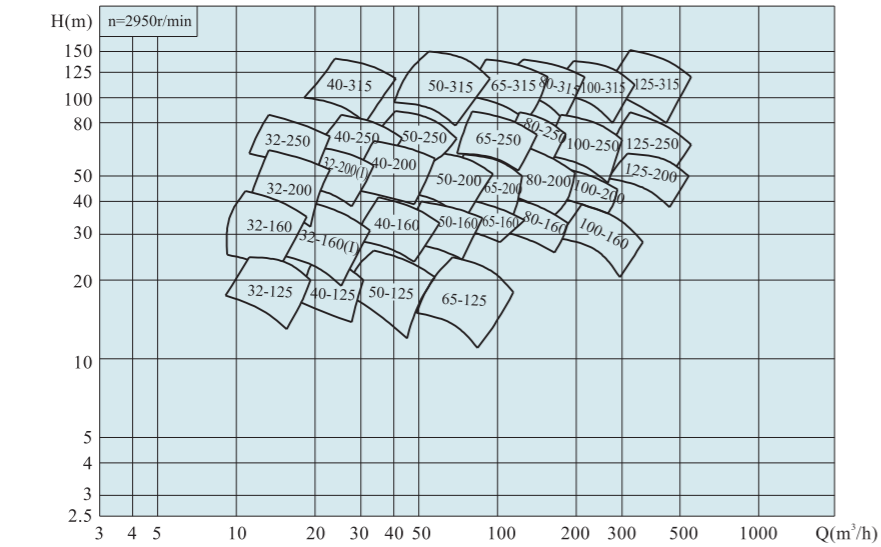

性能参数表 Performance parameters of the table

泵型号 Pump model	转速 n Speed (r/min)	流量 Q Capacity		扬程 Head (m)	效率 Efficiency (%)	功率 Power(kw)		必须汽蚀余量 (NPSH)r (m)	泵口径 Bore (mm)		总重量 Grand weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft	配套功率 Engine		进口 Inlet	出口 Outlet	
SLNC32-125	2950	11.2	3.1	21.6	45.8	1.44	2.2	5.5	50	32	120
		16.0	4.4	20.0	50.1	1.74					
		19.2	5.3	17.6	49.9	1.85					
SLNC32-125A	2950	9.1	2.5	16.7	44.5	0.93	1.5	5.0	50	32	108
		13.0	3.6	15.5	47.8	1.15					
		15.6	4.3	13.6	45.5	1.27					
SLNC32-125B	2950	7.0	1.9	15.1	41.5	0.69	1.1	4.5	50	32	95
		10.0	2.8	14.0	44.9	0.85					
		12.0	3.3	12.3	42.6	0.95					
SLNC32-160	2950	11.2	3.1	43.2	46.1	2.86	5.5	4.0	50	32	132
		16.0	4.4	40.0	52.1	3.35					
		19.2	5.3	35.2	51.3	3.59					
SLNC32-160A	2950	9.8	2.7	37.8	43.8	2.30	4	4.0	50	32	125
		14.0	3.9	35.0	49.6	2.69					
		16.8	4.7	30.8	49.3	2.86					
SLNC32-160B	2950	8.4	2.3	29.2	40.5	1.65	2.2	4.0	50	32	101
		12.0	3.3	27.0	46.1	1.92					
		14.4	4.0	23.8	45.9	2.03					
SLNC32-160(I)	2950	15.8	4.4	32.1	49.0	2.82	4	5.0	50	32	120
		22.5	6.3	30.0	56.0	3.30					
		27.0	7.5	26.0	54.5	3.56					
SLNC32-160(I)A	2950	13.7	3.8	27.2	49.0	2.15	3	5.0	50	32	96
		19.5	5.4	24.6	55.0	2.55					
		23.4	6.5	22.2	54.8	2.75					
SLNC32-160(I)B	2950	11.9	3.3	22.5	49.0	1.60	2.2	4.5	50	32	81
		17.0	4.7	20.8	54.8	1.85					
		20.4	5.7	19.1	54.5	2.05					
SLNC32-200	2950	14.0	3.9	58.3	42.6	5.22	7.5	6.0	50	32	175
		20.0	5.6	54.0	48.8	6.03					
		24.0	6.7	47.5	47.9	6.49					
SLNC32-200A	2950	12.6	3.5	49.7	40.7	4.19	7.5	5.5	50	32	130
		18.0	5.0	46.0	46.9	4.81					
		21.6	6.0	40.5	46.0	5.18					
SLNC32-200B	2950	11.2	3.1	41.0	38.9	3.22	5.5	5.5	50	32	127
		16.0	4.4	38.0	44.6	3.71					
		19.2	5.3	33.4	43.5	4.02					
SLNC32-200(I)	2950	19.3	5.3	64.0	47.2	7.30	11	4.5	50	32	83
		27.5	7.6	59.0	53.1	8.90					
		33.0	9.2	54.5	52.5	9.70					
SLNC32-200(I)A	2950	17.5	4.9	53.5	47.0	5.60	7.5	4.5	50	32	78
		25.0	6.9	50.0	53.0	6.60					
		30.0	8.3	46.0	52.0	7.48					

性能参数表 Performance parameters of the table

泵型号 Pump model	转速 n Speed (r/min)	流量 Q Capacity		扬程 Head (m)	效率 Efficiency (%)	功率 Power(kw)		必须汽蚀余量 (NPSH)r (m)	泵口径 Bore (mm)		总重量 Grand weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft	配套功率 Engine		进口 Inlet	出口 Outlet	
SLNC32-200(I)B	2950	16.1	4.5	47.2	46.7	4.70	7.5	4.5	50	32	73
		23.0	6.4	44.0	52.5	5.50					
		27.6	7.7	41.0	51.3	6.10					
SLNC32-250	2950	9.1	2.5	75.0	22.0	9.20	11	4.0	50	32	205
		13.0	3.6	66.0	24.3	9.95					
		15.6	4.3	58.0	23.5	10.60					
SLNC32-250A	2950	8.4	2.3	67.0	21.1	7.70	11	4.0	50	32	190
		12.0	3.3	60.0	24.0	8.60					
		14.4	4.0	53.0	23.6	9.00					
SLNC32-250B	2950	7.7	2.1	62.5	21.0	6.90	11	4.0	50	32	157
		11.0	3.1	53.0	23.9	7.80					
		13.2	3.7	44.0	23.5	8.70					
SLNC40-125	2950	17.5	4.9	24.3	56.0	2.07	3	4.5	65	40	145
		25.0	6.9	22.5	62.5	2.45					
		30.0	8.3	19.8	61.8	2.62					
SLNC40-125A	2950	16.1	4.5	18.4	55.7	1.45	2.2	4.5	65	40	112
		23.0	6.4	17.0	62.0	1.72					
		27.6	7.7	15.0	61.1	1.84					
SLNC40-125B	2950	14.7	4.1	13.0	52.8	0.98	2.2	4.5	65	40	89
		21.0	5.8	12.0	60.1	1.14					
		25.2	7.0	10.6	59.0	1.23					
SLNC40-160	2950	29.4	8.2	32.4	51.5	5.04	7.5	4.0	65	40	170
		42.0	11.7	30.0	55.0	6.24					
		50.4	14.0	26.4	53.3	6.80					
SLNC40-160A	2950	25.9	7.2	25.4	50.3	3.56	5.5	4.0	65	40	124
		37.0	10.3	23.5	54.5	4.35					
		44.4	12.3	20.7	52.5	4.77					
SLNC40-160B	2950	22.4	6.2	22.7	48.8	2.84	4	4.0	65	40	98
		32.0	8.9	21.0	53.1	3.45					
		38.4	10.7	18.5	50.3	3.84					
SLNC40-200	2950	33.6	9.3	61.6	52.3	10.78	18.5	4.0	65	40	188
		48.0	13.3	57.0	56.6	13.17					
		57.6	16.0	50.2	56.2	14.01					
SLNC40-200A	2950	30.8	8.6	52.4	47.7	9.22	15	4.0	65	40	173
		44.0	12.2	48.5	55.6	10.46					
		52.8	14.7	42.7	55.0	11.17					
SLNC40-200B	2950	28.0	7.8	44.3	46.5	7.27	11	4.0	65	40	168
		40.0	11.1	41.0	54.3	8.23					
		48.0	13.3	36.1	53.7	8.79					
SLNC40-200	1480	16.8	4.7	15.1	53.5	1.29	2.2	3.0	65	40	102
		24.0	6.7	14.0	59.9	1.53					
		28.8	8.0	12.3	57.5	1.68					

性能参数表 Performance parameters of the table

泵型号 Pump model	转速 n Speed (r/min)	流量 Q Capacity		扬程 Head (m)	效率 Efficiency (%)	功率 Power(kw)		必须汽蚀余量 (NPSH)r (m)	泵口径 Bore (mm)		总重量 Grand weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft	配套功率 Engine		进口 Inlet	出口 Outlet	
SLNC40-200A	1480	15.4	4.3	13.0	52.5	1.04	1.5	3.0	65	40	89
		22.0	6.1	12.0	58.2	1.24					
		26.4	7.3	10.6	56.0	1.36					
SLNC40-200B	1480	14.0	3.9	10.8	46.5	0.89	1.5	3.0	65	40	83
		20.0	5.6	10.0	54.3	1.00					
		24.0	6.7	8.8	53.7	1.07					
SLNC40-250	2950	25.9	7.2	82.1	47.0	12.33	18.5	4.5	65	40	252
		37.0	10.3	76.0	50.9	15.05					
		44.4	12.3	66.9	49.0	16.51					
SLNC40-250A	2950	23.8	6.6	75.6	45.0	10.90	18.5	4.5	65	40	249
		34.0	9.4	70.0	49.7	13.05					
		40.8	11.3	61.6	48.0	14.27					
SLNC40-250B	2950	21.7	6.0	68.0	44.5	9.04	15	4.5	65	40	235
		31.0	8.6	63.0	48.8	10.91					
		37.2	10.3	55.4	47.0	11.96					
SLNC40-250C	2950	19.6	5.4	59.4	44.0	7.21	11	4.5	65	40	220
		28.0	7.8	55.0	47.2	8.89					
		33.6	9.3	48.4	46.2	9.59					
SLNC40-250	1480	12.6	3.5	21.6	47.5	1.56	3	4.5	65	40	157
		18.0	5.0	20.0	51.4	1.91					
		21.6	6.0	17.6	49.5	2.09					
SLNC40-250A	1480	11.9	3.3	19.4	45.5	1.39	2.2	4.5	65	40	154
		17.0	4.7	18.0	50.2	1.66					
		20.4	5.7	15.8	48.5	1.82					
SLNC40-250B	1480	11.2	3.1	16.2	45.0	1.10	2.2	4.5	65	40	152
		16.0	4.4	15.0	49.3	1.33					
		19.2	5.3	13.2	47.5	1.45					
SLNC40-250C	1480	10.5	2.9	14.0	44.5	0.90	1.5	4.5	65	40	92
		15.0	4.2	13.0	47.7	1.11					
		18.0	5.0	11.4	46.7	1.20					
SLNC40-315	2950	16.2	4.5	125.5	29.2	23.60	30	4.5	65	40	360
		23.2	6.4	124.5	36.0	26.20					
		27.8	7.7	122.0	40.2	27.00					
SLNC40-315A	2950	15.9	4.4	117.0	29.0	21.00	30	4.5	65	40	293
		22.7	6.3	115.0	35.9	25.20					
		27.2	7.6	112.0	39.0	26.00					
SLNC40-315B	2950	15.4	4.3	110.0	28.0	19.90	30	4.5	65	40	257
		22.0	6.1	108.0	35.7	22.70					
		26.4	7.3	105.0	38.0	23.95					
SLNC40-315C	2950	14.7	4.1	102.5	27.0	18.00	30	4.5	65	40	234
		21.0	5.8	100.0	35.5	20.50					
		25.2	7.0	97.3	37.0	21.30					



性能参数表 Performance parameters of the table

泵型号 Pump model	转速 n Speed (r/min)	流量 Q Capacity		扬程 Head (m)	效率 Efficiency (%)	功率 Power(kw)		必须汽蚀余量 (NPSH)r (m)	泵口径 Bore (mm)		总重量 Grand weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft	配套功率 Engine		进口 Inlet	出口 Outlet	
SLNC40-315D	2950	14.4	4.0	92.2	27.0	15.70	22	4.5	65	40	225
		20.5	5.7	91.0	35.4	18.60					
		24.6	6.8	89.0	37.0	18.90					
SLNC40-315	1480	8.8	2.4	34.6	36.0	3.15	5.5	4.0	65	40	175
		12.5	3.5	32.0	39.1	3.78					
		15.0	4.2	28.2	37.8	4.11					
SLNC40-315A	1480	8.1	2.2	31.3	35.5	2.79	4	4.0	65	40	155
		11.5	3.2	29.0	38.5	3.33					
		13.8	3.8	25.5	36.0	3.55					
SLNC40-315B	1480	7.7	2.1	29.2	33.0	2.59	4	4.0	65	40	140
		11.0	3.1	27.0	37.4	2.86					
		13.2	3.7	23.8	35.5	3.17					
SLNC40-315C	1480	7.4	2.0	27.0	32.5	2.12	3	4.0	65	40	132
		10.5	2.9	25.0	36.4	2.42					
		12.6	3.5	22.0	35.0	2.58					
SLNC40-315D	1480	7.0	1.9	23.8	31.8	1.78	3	4.0	65	40	126
		10.0	2.8	22.0	34.5	2.12					
		12.0	3.3	19.4	33.0	2.35					
SLNC50-125	2950	26.6	7.4	23.8	54.5	3.95	5.5	4.0	65	50	120
		38.0	10.6	21.0	58.8	4.70					
		45.6	12.7	18.5	54.9	5.25					
SLNC50-125A	2950	24.5	6.8	20.5	46.5	2.85	4	4.0	65	50	98
		35.0	9.7	18.5	56.0	3.55					
		42.0	11.7	16.0	55.5	3.80					
SLNC50-125B	2950	22.4	6.2	17.5	52.0	2.30	3	4.0	65	50	100
		32.0	8.9	15.0	55.5	2.65					
		38.4	10.7	14.3	55.0	2.72					
SLNC50-160	2950	42.0	11.7	37.8	57.2	7.56	15	8.0	65	50	487
		60.0	16.7	35.0	60.0	9.54					
		72.0	20.0	30.8	58.3	10.37					
SLNC50-160A	2950	37.8	10.5	33.5	56.5	6.10	11	6.0	65	50	475
		54.0	15.0	31.0	59.1	7.72					
		64.8	18.0	27.3	57.2	8.42					
SLNC50-160B	2950	35.0	9.7	27.0	56.0	4.60	7.5	4.5	65	50	437
		50.0	13.9	25.0	58.3	5.84					
		60.0	16.7	22.0	56.6	6.36					
SLNC50-200	2950	46.2	12.8	55.1	55.8	12.43	22	4.5	65	50	235
		66.0	18.3	51.0	61.5	14.91					
		79.2	22.0	44.9	57.5	16.85					
SLNC50-200A	2950	40.6	11.3	48.6	55.3	9.72	18.5	4.5	65	50	212
		58.0	16.1	45.0	60.9	11.68					
		69.6	19.3	39.6	57.0	13.18					

性能参数表 Performance parameters of the table

泵型号 Pump model	转速 n Speed (r/min)	流量 Q Capacity		扬程 Head (m)	效率 Efficiency (%)	功率 Power(kw)		必须汽蚀余量 (NPSH)r (m)	泵口径 Bore (mm)		总重量 Grand weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft	配套功率 Engine		进口 Inlet	出口 Outlet	
SLNC50-200B	2950	37.8	10.5	41.0	54.3	7.79	15	4.5	65	50	199
		54.0	15.0	38.0	59.7	9.37					
		64.8	18.0	33.4	55.9	10.56					
SLNC50-250	2950	40.6	11.3	82.1	56.1	16.19	30	4.5	65	50	379
		58.0	16.1	76.0	62.0	19.37					
		69.6	19.3	66.9	60.0	21.14					
SLNC50-250A	2950	37.8	10.5	69.1	55.7	12.78	22	4.5	65	50	307
		54.0	15.0	64.0	61.3	15.36					
		64.8	18.0	56.3	58.5	17.00					
SLNC50-250B	2950	35.0	9.7	56.2	54.4	9.85	15	4.5	65	50	245
		50.0	13.9	52.0	60.0	11.81					
		60.0	16.7	45.8	56.5	13.24					
SLNC50-250C	2950	32.2	8.9	46.4	52.4	7.78	11	4.5	65	50	230
		46.0	12.8	43.0	58.1	9.28					
		55.2	15.3	37.8	53.9	10.56					
SLNC50-250	1480	19.6	5.4	21.6	57.1	2.02	4	4.5	65	50	178
		28.0	7.8	20.0	63.0	2.42					
		33.6	9.3	17.6	61.0	2.64					
SLNC50-250A	1480	18.9	5.3	17.3	56.7	1.57	3	4.5	65	50	153
		27.0	7.5	16.0	62.3	1.89					
		32.4	9.0	14.1	59.5	2.09					
SLNC50-250B	1480	18.2	5.1	14.0	55.4	1.26	2.2	4.5	65	50	137
		26.0	7.2	13.0	61.0	1.51					
		31.2	8.7	11.4	57.5	1.69					
SLNC50-250C	1480	17.5	4.9	10.8	53.4	0.96	2.2	4.5	65	50	132
		25.0	6.9	10.0	59.1	1.15					
		30.0	8.3	8.8	54.9	1.31					
SLNC50-315	2950	53.2	14.8	140.4	45.2	45.03	75	6.0	65	50	684
		76.0	21.1	130.0	50.2	53.63					
		91.2	25.3	114.4	47.1	60.36					
SLNC50-315A	2950	49.0	13.6	125.3	44.4	37.68	55	6.0	65	50	563
		70.0	19.4	116.0	49.1	45.07					
		84.0	23.3	102.1	46.1	50.69					
SLNC50-315B	2950	45.5	12.6	108.0	43.2	31.00	45	6.0	65	50	437
		65.0	18.1	100.0	48.1	36.82					
		78.0	21.7	88.0	45.3	41.29					
SLNC50-315C	2950	42.0	11.7	97.2	42.1	26.42	45	6.0	65	50	435
		60.0	16.7	90.0	46.9	31.38					
		72.0	20.0	79.2	44.2	35.16					
SLNC50-315D	2950	39.2	10.9	84.2	41.0	21.95	30	6.0	65	50	402
		56.0	15.6	78.0	45.7	26.05					
		67.2	18.7	68.6	43.1	29.16					

性能参数表 Performance parameters of the table

泵型号 Pump model	转速 n Speed (r/min)	流量 Q Capacity		扬程 Head (m)	效率 Efficiency (%)	功率 Power(kw)		必须汽蚀余量 (NPSH)r (m)	泵口径 Bore (mm)		总重量 Grand weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft	配套功率 Engine		进口 Inlet	出口 Outlet	
SLNC50-315	1480	26.6	7.4	34.6	42.5	5.89	7.5	5.5	65	50	222
		38.0	10.6	32.0	49.2	6.73					
		45.6	12.7	28.2	46.5	7.53					
SLNC50-315A	1480	24.5	6.8	29.2	42.1	4.62	7.5	5.5	65	50	222
		35.0	9.7	27.0	48.6	5.30					
		42.0	11.7	23.8	46.0	5.91					
SLNC50-315B	1480	22.4	6.2	25.9	41.5	3.81	7.5	5.5	65	50	222
		32.0	8.9	24.0	48.1	4.35					
		38.4	10.7	21.1	45.6	4.85					
SLNC50-315C	1480	21.0	5.8	23.2	41.0	3.24	5.5	5.5	65	50	222
		30.0	8.3	21.5	47.5	3.70					
		36.0	10.0	18.9	45.0	4.12					
SLNC50-315D	1480	18.9	5.3	20.5	40.4	2.62	5.5	5.5	65	50	208
		27.0	7.5	19.0	46.9	2.98					
		32.4	9.0	16.7	44.4	3.32					
SLNC65-125	2950	52.5	14.6	22.7	60.7	5.35	11	4.0	80	65	234
		75.0	20.8	21.0	65.4	6.56					
		90.0	25.0	18.5	61.5	7.37					
SLNC65-125A	2950	49.0	13.6	19.4	58.5	4.44	7.5	4.0	80	65	185
		70.0	19.4	18.0	62.6	5.48					
		84.0	23.3	15.8	59.3	6.11					
SLNC65-125B	2950	45.5	12.6	16.2	57.0	3.52	5.5	4.0	80	65	181
		65.0	18.1	15.0	60.8	4.37					
		78.0	21.7	13.2	58.1	4.83					
SLNC65-160	2950	56.0	15.6	40.0	61.8	9.87	18.5	4.0	80	65	225
		80.0	22.2	37.0	65.9	12.24					
		96.0	26.7	32.6	63.5	13.41					
SLNC65-160A	2950	52.5	14.6	32.4	60.1	7.71	15	4.0	80	65	223
		75.0	20.8	30.0	64.1	9.57					
		90.0	25.0	26.4	61.8	10.48					
SLNC65-160B	2950	49.0	13.6	25.9	52.6	6.58	11	4.0	80	65	211
		70.0	19.4	24.0	62.0	7.38					
		84.0	23.3	21.1	54.6	8.85					
SLNC65-200	2950	70.0	19.4	54.0	63.8	16.14	30	4.0	80	65	285
		100.0	27.8	50.0	67.5	20.19					
		120.0	33.3	44.0	64.6	22.27					
SLNC65-200A	2950	66.5	18.5	46.4	63.3	13.29	22	4.0	80	65	282
		95.0	26.4	43.0	66.8	16.66					
		114.0	31.7	37.8	64.3	18.28					
SLNC65-200B	2950	63.0	17.5	35.6	61.8	9.90	15	4.0	80	65	251
		90.0	25.0	33.0	65.0	12.45					
		108.0	30.0	29.0	63.1	13.54					

性能参数表 Performance parameters of the table

泵型号 Pump model	转速 n Speed (r/min)	流量 Q Capacity		扬程 Head (m)	效率 Efficiency (%)	功率 Power(kw)		必须汽蚀余量 (NPSH)r (m)	泵口径 Bore (mm)		总重量 Grand weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft	配套功率 Engine		进口 Inlet	出口 Outlet	
SLNC65-200	1480	38.5	10.7	13.0	64.2	2.12	4	4.0	80	65	157
		55.0	15.3	12.0	67.9	2.65					
		66.0	18.3	10.6	65.0	2.92					
SLNC65-200A	1480	35.0	9.7	10.8	63.7	1.62	3	4.0	80	65	142
		50.0	13.9	10.0	67.2	2.03					
		60.0	16.7	8.8	64.7	2.22					
SLNC65-200B	1480	31.5	8.8	9.2	62.2	1.27	2.2	4.0	80	65	138
		45.0	12.5	8.5	65.4	1.59					
		54.0	15.0	7.5	63.5	1.73					
SLNC65-250	2950	73.5	20.4	86.4	59.1	29.28	45	5.0	80	65	518
		105.0	29.2	80.0	65.1	35.16					
		126.0	35.0	70.4	62.2	38.86					
SLNC65-250A	2950	70.0	19.4	71.3	58.8	23.12	37	5.0	80	65	460
		100.0	27.8	66.0	64.4	27.93					
		120.0	33.3	58.1	61.7	30.78					
SLNC65-250B	2950	67.9	18.9	58.3	58.3	18.51	30	4.5	80	65	385
		97.0	26.9	54.0	63.5	22.48					
		116.4	32.3	47.5	60.2	25.04					
SLNC65-250C	2950	66.5	18.5	46.4	57.7	14.58	30	4.5	80	65	375
		95.0	26.4	43.0	63.1	17.64					
		114.0	31.7	37.8	59.5	19.76					
SLNC65-250	1480	37.8	10.5	21.6	58.3	3.82	5.5	4.0	80	65	291
		54.0	15.0	20.0	64.3	4.58					
		64.8	18.0	17.6	61.4	5.06					
SLNC65-250A	1480	35.0	9.7	18.4	58.0	3.02	5.5	4.0	80	65	291
		50.0	13.9	17.0	63.6	3.64					
		60.0	16.7	15.0	60.9	4.02					
SLNC65-250B	1480	33.6	9.3	15.1	57.5	2.41	4	4.0	80	65	275
		48.0	13.3	14.0	62.7	2.92					
		57.6	16.0	12.3	59.4	3.26					
SLNC65-250C	1480	32.9	9.1	11.9	56.9	1.87	3	4.0	80	65	237
		47.0	13.1	11.0	62.3	2.26					
		56.4	15.7	9.7	58.7	2.53					
SLNC65-315	2950	84.0	23.3	132.8	53.6	56.73	90	6.0	80	65	774
		120.0	33.3	123.0	57.6	69.83					
		144.0	40.0	108.2	56.1	75.71					
SLNC65-315A	2950	80.5	22.4	113.4	52.4	47.47	75	6.0	80	65	739
		115.0	31.9	105.0	56.5	58.24					
		138.0	38.3	92.4	55.2	62.95					
SLNC65-315B	2950	77.0	21.4	100.4	51.6	40.84	75	5.5	80	65	737
		110.0	30.6	93.0	55.6	50.14					
		132.0	36.7	81.8	54.2	54.31					



性能参数表 Performance parameters of the table

泵型号 Pump model	转速 n Speed (r/min)	流量 Q Capacity		扬程 Head (m)	效率 Efficiency (%)	功率 Power(kw)		必须汽蚀余量 (NPSH)r (m)	泵口径 Bore (mm)		总重量 Grand weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft	配套功率 Engine		进口 Inlet	出口 Outlet	
SLNC65-315C	2950	74.9	20.8	92.9	51.0	37.17	55	5.5	80	65	580
		107.0	29.7	86.0	55.0	45.59					
		128.4	35.7	75.7	53.4	49.59					
SLNC65-315D	2950	73.5	20.4	85.3	50.5	33.84	55	5.5	80	65	578
		105.0	29.2	79.0	54.5	41.48					
		126.0	35.0	69.5	52.9	45.12					
SLNC65-315	1480	45.5	12.6	35.1	55.9	7.79	11	4.0	80	65	325
		65.0	18.1	32.5	60.2	9.56					
		78.0	21.7	28.6	59.9	10.15					
SLNC65-315A	1480	43.4	12.1	31.3	55.4	6.69	11	4.0	80	65	322
		62.0	17.2	29.0	59.7	8.21					
		74.4	20.7	25.5	59.3	8.72					
SLNC65-315B	1480	41.3	11.5	27.5	54.9	5.65	11	4.0	80	65	320
		59.0	16.4	25.5	59.2	6.93					
		70.8	19.7	22.4	58.7	7.38					
SLNC65-315C	1480	39.2	10.9	25.9	54.4	5.09	7.5	4.0	80	65	257
		56.0	15.6	24.0	58.7	6.24					
		67.2	18.7	21.1	58.1	6.66					
SLNC65-315D	1480	37.8	10.5	23.8	53.9	4.54	7.5	4.0	80	65	254
		54.0	15.0	22.0	58.2	5.56					
		64.8	18.0	19.4	57.5	5.95					
SLNC80-160	2950	101.5	28.2	38.9	71.5	15.04	22	5.5	100	80	295
		145.0	40.3	36.0	76.9	18.50					
		174.0	48.3	31.7	74.8	20.08					
SLNC80-160A	2950	95.9	26.6	32.4	71.0	11.93	18.5	5.5	100	80	252
		137.0	38.1	30.0	76.5	14.64					
		164.4	45.7	26.4	74.4	15.90					
SLNC80-160B	2950	89.6	24.9	25.9	70.6	8.96	15	5.5	100	80	237
		128.0	35.6	24.0	75.9	11.03					
		153.6	42.7	21.1	74.0	11.95					
SLNC80-200	2950	115.5	32.1	62.6	67.1	29.38	45	5.5	100	80	410
		165.0	45.8	58.0	75.5	34.54					
		198.0	55.0	51.0	74.0	37.21					
SLNC80-200A	2950	108.5	30.1	52.9	66.4	23.56	37	5.5	100	80	389
		155.0	43.1	49.0	74.7	27.71					
		186.0	51.7	43.1	73.3	29.82					
SLNC80-200B	2950	101.5	28.2	45.4	65.4	19.18	30	5.5	100	80	386
		145.0	40.3	42.0	73.6	22.55					
		174.0	48.3	37.0	72.1	24.31					
SLNC80-250	2950	112.0	31.1	81.0	64.6	38.27	55	5.5	100	80	616
		160.0	44.4	75.0	71.5	45.73					
		192.0	53.3	66.0	70.6	48.91					

性能参数表 Performance parameters of the table

泵型号 Pump model	转速 n Speed (r/min)	流量 Q Capacity		扬程 Head (m)	效率 Efficiency (%)	功率 Power(kw)		必须汽蚀余量 (NPSH)r (m)	泵口径 Bore (mm)		总重量 Grand weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft	配套功率 Engine		进口 Inlet	出口 Outlet	
SLNC80-250A	2950	105.0	29.2	69.1	64.0	30.90	45	5.5	100	80	486
		150.0	41.7	64.0	71.0	36.85					
		180.0	50.0	56.3	70.1	39.41					
SLNC80-250B	2950	98.0	27.2	61.6	63.2	26.01	37	5.5	100	80	445
		140.0	38.9	57.0	69.9	31.11					
		168.0	46.7	50.2	68.7	33.43					
SLNC80-250C	2950	91.0	25.3	56.2	61.8	22.53	37	5.5	100	80	445
		130.0	36.1	52.0	68.5	26.89					
		156.0	43.3	45.8	67.2	28.95					
SLNC80-250	1480	56.0	15.6	19.4	64.9	4.57	7.5	4.0	100	80	282
		80.0	22.2	18.0	72.0	5.45					
		96.0	26.7	15.8	70.9	5.84					
SLNC80-250A	1480	52.5	14.6	17.3	63.9	3.87	5.5	4.0	100	80	265
		75.0	20.8	16.0	70.9	4.61					
		90.0	25.0	14.1	69.9	4.94					
SLNC80-250B	1480	49.0	13.6	15.1	62.9	3.21	5.5	4.0	100	80	267
		70.0	19.4	14.0	69.8	3.83					
		84.0	23.3	12.3	68.7	4.10					
SLNC80-250C	1480	45.5	12.6	13.0	61.0	2.63	4	4.0	100	80	239
		65.0	18.1	12.0	68.0	3.13					
		78.0	21.7	10.6	66.6	3.37					
SLNC80-315	2950	126.0	35.0	140.4	63.4	76.04	110	6.0	100	80	1123
		180.0	50.0	130.0	70.3	90.70					
		216.0	60.0	114.4	69.5	96.89					
SLNC80-315A	2950	119.0	33.1	122.0	62.9	62.92	90	6.0	100	80	760
		170.0	47.2	113.0	69.5	75.32					
		204.0	56.7	99.4	68.8	80.35					
SLNC80-315B	2950	112.0	31.1	104.8	61.9	51.65	75	6.0	100	80	737
		160.0	44.4	97.0	68.5	61.74					
		192.0	53.3	85.4	67.8	65.87					
SLNC80-315C	2950	105.0	29.2	97.2	61.1	45.52	75	5.5	100	80	735
		150.0	41.7	90.0	67.7	54.34					
		180.0	50.0	79.2	67.0	57.98					
SLNC80-315D	2950	98.0	27.2	88.6	60.0	39.42	55	5.5	100	80	670
		140.0	38.9	82.0	66.5	47.04					
		168.0	46.7	72.2	65.8	50.20					
SLNC80-315	1480	63.0	17.5	35.1	62.9	9.58	15	4.5	100	80	346
		90.0	25.0	32.5	69.5	11.47					
		108.0	30.0	28.6	68.8	12.23					
SLNC80-315A	1480	59.5	16.5	30.2	62.4	7.86	11	4.5	100	80	344
		85.0	23.6	28.0	69.1	9.39					
		102.0	28.3	24.6	68.4	10.01					

性能参数表 Performance parameters of the table

泵型号 Pump model	转速 n Speed (r/min)	流量 Q Capacity		扬程 Head (m)	效率 Efficiency (%)	功率 Power(kw)		必须汽蚀余量 (NPSH)r (m)	泵口径 Bore (mm)		总重量 Grand weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft	配套功率 Engine		进口 Inlet	出口 Outlet	
SLNC80-315B	1480	56.0	15.6	24.8	61.5	6.16	11	4.5	100	80	341
		80.0	22.2	23.0	68.4	7.33					
		96.0	26.7	20.2	67.6	7.83					
SLNC80-315C	1480	52.5	14.6	22.7	60.5	5.36	7.5	4.5	100	80	243
		75.0	20.8	21.0	67.4	6.37					
		90.0	25.0	18.5	66.6	6.81					
SLNC80-315D	1480	49.0	13.6	20.5	59.2	4.63	7.5	4.5	100	80	230
		70.0	19.4	19.0	66.3	5.47					
		84.0	23.3	16.7	65.5	5.84					
SLNC80-400	1480	70.0	19.4	60.5	57.3	20.13	30	5.0	100	80	523
		100.0	27.8	56.0	63.5	24.03					
		120.0	33.3	49.3	61.5	26.20					
SLNC80-400A	1480	65.8	18.3	55.1	56.8	17.39	30	5.0	100	80	515
		94.0	26.1	51.0	62.5	20.90					
		112.8	31.3	44.9	60.7	22.73					
SLNC80-400B	1480	61.6	17.1	49.7	55.9	14.92	22	5.0	100	80	446
		88.0	24.4	46.0	61.7	17.88					
		105.6	29.3	40.5	59.7	19.51					
SLNC80-400C	1480	58.8	16.3	44.3	55.2	12.85	18.5	5.0	100	80	420
		84.0	23.3	41.0	61.1	15.36					
		100.8	28.0	36.1	59.1	16.77					
SLNC80-400D	1480	56.0	15.6	41.0	54.4	11.51	18.5	5.0	100	80	380
		80.0	22.2	38.0	60.2	13.76					
		96.0	26.7	33.4	58.3	15.00					
SLNC100-160	2950	140.0	38.9	32.4	68.9	17.94	30	5.0	125	100	405
		200.0	55.6	30.0	72.1	22.68					
		240.0	66.7	26.4	71.5	24.15					
SLNC100-160A	2950	133.0	36.9	28.1	67.8	15.01	30	5.0	125	100	403
		190.0	52.8	26.0	70.9	18.99					
		228.0	63.3	22.9	70.2	20.25					
SLNC100-160B	2950	126.0	35.0	22.7	66.5	11.71	22	5.0	125	100	516
		180.0	50.0	21.0	69.7	14.78					
		216.0	60.0	18.5	68.7	15.83					
SLNC100-200	2950	164.5	45.7	54.0	67.1	36.07	55	6.0	125	100	557
		235.0	65.3	50.0	71.8	44.59					
		282.0	78.3	44.0	70.3	48.10					
SLNC100-200A	2950	157.5	43.8	46.4	66.3	30.06	45	5.0	125	100	494
		225.0	62.5	43.0	70.9	37.19					
		270.0	75.0	37.8	69.5	40.06					
SLNC100-200B	2950	150.5	41.8	38.9	65.0	24.53	37	5.0	125	100	435
		215.0	59.7	36.0	69.7	30.26					
		258.0	71.7	31.7	68.0	32.75					

性能参数表 Performance parameters of the table

泵型号 Pump model	转速 n Speed (r/min)	流量 Q Capacity		扬程 Head (m)	效率 Efficiency (%)	功率 Power(kw)		必须汽蚀余量 (NPSH)r (m)	泵口径 Bore (mm)		总重量 Grand weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft	配套功率 Engine		进口 Inlet	出口 Outlet	
SLNC100-250	2950	175.0	48.6	83.2	69.8	56.82	90	6.0	125	100	784
		250.0	69.4	77.0	75.5	69.48					
		300.0	83.3	67.8	74.1	74.76					
SLNC100-250A	2950	168.0	46.7	75.6	68.6	50.45	75	6.0	125	100	740
		240.0	66.7	70.0	74.3	61.62					
		288.0	80.0	61.6	72.5	66.68					
SLNC100-250B	2950	161.0	44.7	61.6	66.7	40.49	55	5.5	125	100	630
		230.0	63.9	57.0	72.4	49.34					
		276.0	76.7	50.2	70.3	53.66					
SLNC100-250C	2950	154.0	42.8	49.7	65.5	31.83	55	5.5	125	100	628
		220.0	61.1	46.0	71.3	38.68					
		264.0	73.3	40.5	69.3	42.02					
SLNC100-250	1480	96.6	26.8	20.5	74.3	7.27	11	5.5	125	100	276
		138.0	38.3	19.0	77.8	9.18					
		165.6	46.0	16.7	74.7	10.10					
SLNC100-250A	1480	89.6	24.9	17.8	73.2	5.94	11	5.5	125	100	276
		128.0	35.6	16.5	76.7	7.50					
		153.6	42.7	14.5	73.6	8.26					
SLNC100-250B	1480	82.6	22.9	15.1	71.8	4.74	7.5	5.5	125	100	276
		118.0	32.8	14.0	75.3	5.98					
		141.6	39.3	12.3	72.2	6.58					
SLNC100-250C	1480	77.0	21.4	11.9	70.0	3.56	5.5	5.5	125	100	227
		110.0	30.6	11.0	73.5	4.49					
		132.0	36.7	9.7	70.4	4.95					
SLNC100-315	2950	196.0	54.4	118.8	62.8	101.04	160	6.5	125	100	1334
		280.0	77.8	110.0	66.2	126.78					
		336.0	93.3	96.8	64.2	138.05					
SLNC100-315A	2950	182.0	50.6	108.0	62.0	86.39	132	5.5	125	100	1247
		260.0	72.2	100.0	65.1	108.83					
		312.0	86.7	88.0	63.3	118.20					
SLNC100-315B	2950	175.0	48.6	91.8	61.4	71.30	110	5.5	125	100	1210
		250.0	69.4	85.0	64.6	89.64					
		300.0	83.3	74.8	62.8	97.37					
SLNC100-315C	2950	168.0	46.7	85.3	60.4	64.67	110	5.0	125	100	1213
		240.0	66.7	79.0	63.6	81.24					
		288.0	80.0	69.5	61.8	88.28					
SLNC100-315D	2950	161.0	44.7	78.8	59.4	58.23	90	5.0	125	100	835
		230.0	63.9	73.0	63.1	72.51					
		276.0	76.7	64.2	61.0	79.20					
SLNC100-315	1480	98.0	27.2	31.3	65.0	12.87	18.5	5.5	125	100	413
		140.0	38.9	29.0	71.9	15.39					
		168.0	46.7	25.5	69.0	16.93					



性能参数表 Performance parameters of the table

泵型号 Pump model	转速 n Speed (r/min)	流量 Q Capacity		扬程 Head (m)	效率 Efficiency (%)	功率 Power(kw)		必须汽蚀余量 (NPSH)r (m)	泵口径 Bore (mm)		总重量 Grand weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft	配套功率 Engine		进口 Inlet	出口 Outlet	
SLNC100-315A	1480	91.0	25.3	28.1	64.2	10.85	18.5	5.5	125	100	413
		130.0	36.1	26.0	70.8	13.01					
		156.0	43.3	22.9	68.1	14.28					
SLNC100-315B	1480	87.5	24.3	24.8	63.6	9.31	15	5.5	125	100	382
		125.0	34.7	23.0	70.3	11.14					
		150.0	41.7	20.2	67.6	12.24					
SLNC100-315C	1480	84.0	23.3	22.7	62.6	8.29	15	5.0	125	100	382
		120.0	33.3	21.0	69.3	9.91					
		144.0	40.0	18.5	66.6	10.89					
SLNC100-315D	1480	80.5	22.4	20.5	61.6	7.31	15	5.0	125	100	382
		115.0	31.9	19.0	68.8	8.65					
		138.0	38.3	16.7	65.8	9.56					
SLNC100-400	1480	100.8	28.0	58.3	65.0	24.65	37	5.5	125	100	560
		144.0	40.0	54.0	70.9	29.89					
		172.8	48.0	47.5	69.0	32.43					
SLNC100-400A	1480	94.5	26.3	51.8	65.0	20.54	30	5.5	125	100	555
		135.0	37.5	48.0	69.9	25.26					
		162.0	45.0	42.2	68.0	27.42					
SLNC100-400B	1480	91.0	25.3	47.5	63.0	18.70	30	5.5	125	100	513
		130.0	36.1	44.0	68.1	22.89					
		156.0	43.3	38.7	66.0	24.94					
SLNC100-400C	1480	84.0	23.3	43.2	63.0	15.70	22	5.0	125	100	480
		120.0	33.3	40.0	65.9	19.85					
		144.0	40.0	35.2	66.0	20.93					
SLNC100-400D	1480	80.5	22.4	38.9	60.0	14.21	22	5.0	125	100	470
		115.0	31.9	36.0	63.9	17.65					
		138.0	38.3	31.7	61.0	19.53					
SLNC125-200	2950	280.0	77.8	57.2	60.1	72.67	110	5.5	150	125	1315
		400.0	111.1	53.0	66.9	86.35					
		480.0	133.3	46.6	62.5	97.61					
SLNC125-200A	2950	259.0	71.9	52.9	58.6	63.74	90	5.5	150	125	1148
		370.0	102.8	49.0	65.7	75.20					
		444.0	123.3	43.1	61.0	85.53					
SLNC125-200B	2950	231.0	64.2	48.6	56.1	54.53	75	5.5	150	125	718
		330.0	91.7	45.0	63.2	64.03					
		396.0	110.0	39.6	58.5	73.05					
SLNC125-250	2950	280.0	77.8	70.2	66.8	80.18	110	5.5	150	125	1231
		400.0	111.1	65.0	72.5	97.72					
		480.0	133.3	57.2	71.1	105.23					
SLNC125-250A	2950	259.0	71.9	67.0	65.6	72.04	110	5.5	150	125	1229
		370.0	102.8	62.0	71.3	87.67					
		444.0	123.3	54.6	69.5	94.98					

性能参数表 Performance parameters of the table

泵型号 Pump model	转速 n Speed (r/min)	流量 Q Capacity		扬程 Head (m)	效率 Efficiency (%)	功率 Power(kw)		必须汽蚀余量 (NPSH)r (m)	泵口径 Bore (mm)		总重量 Grand weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft	配套功率 Engine		进口 Inlet	出口 Outlet	
SLNC125-250B	2950	231.0	64.2	59.4	63.7	58.70	90	5.5	150	125	886
		330.0	91.7	55.0	69.4	71.27					
		396.0	110.0	48.4	67.3	77.61					
SLNC125-250C	2950	210.0	58.3	54.0	62.5	49.44	75	5.5	150	125	839
		300.0	83.3	50.0	68.3	59.85					
		360.0	100.0	44.0	66.3	65.10					
SLNC125-250	1480	150.5	41.8	17.3	72.3	9.80	15	4.0	150	125	425
		215.0	59.7	16.0	75.8	12.37					
		258.0	71.7	14.1	72.7	13.62					
SLNC125-250A	1480	143.5	39.9	15.1	71.2	8.30	15	4.0	150	125	423
		205.0	56.9	14.0	74.7	10.47					
		246.0	68.3	12.3	71.6	11.53					
SLNC125-250B	1480	133.0	36.9	14.0	69.8	7.29	11	4.0	150	125	400
		190.0	52.8	13.0	73.3	9.18					
		228.0	63.3	11.4	70.2	10.12					
SLNC125-250C	1480	126.0	35.0	11.9	68.0	6.00	11	4.0	150	125	380
		180.0	50.0	11.0	71.5	7.55					
		216.0	60.0	9.7	68.4	8.33					
SLNC125-315	1480	161.0	44.7	33.5	73.5	19.98	30	3.5	150	125	522
		230.0	63.9	31.0	80.0	24.29					
		276.0	76.7	27.3	78.5	26.14					
SLNC125-315A	1480	154.0	42.8	29.2	73.0	16.76	30	3.5	150	125	520
		220.0	61.1	27.0	78.9	20.52					
		264.0	73.3	23.8	78.0	21.91					
SLNC125-315B	1480	143.5	39.9	25.9	71.5	14.18	22	3.5	150	125	467
		205.0	56.9	24.0	77.4	17.32					
		246.0	68.3	21.1	76.5	18.51					
SLNC125-315C	1480	136.5	37.9	23.8	70.5	12.54	18.5	3.5	150	125	479
		195.0	54.2	22.0	75.0	15.59					
		234.0	65.0	19.4	74.5	16.57					
SLNC125-315D	1480	129.5	36.0	22.7	68.0	11.77	18.5	3.5	150	125	475
		185.0	51.4	21.0	72.7	14.56					
		222.0	61.7	18.5	71.5	15.64					
SLNC125-400	1480	171.5	47.6	56.2	72.5	36.20	55	3.5	150	125	758
		245.0	68.1	52.0	77.4	44.85					
		294.0	81.7	45.8	74.2	49.41					
SLNC125-400A	1480	162.4	45.1	51.8	71.5	32.09	55	3.5	150	125	756
		232.0	64.4	48.0	75.5	40.19					
		278.4	77.3	42.2	73.0	43.90					
SLNC125-400B	1480	154.0	42.8	46.4	70.5	27.64	45	3.5	150	125	662
		220.0	61.1	43.0	73.6	35.03					
		264.0	73.3	37.8	72.1	37.76					

性能参数表 Performance parameters of the table

泵型号 Pump model	转速 n Speed (r/min)	流量 Q Capacity		扬程 Head (m)	效率 Efficiency (%)	功率 Power(kw)		必须汽蚀余量 (NPSH)r (m)	泵口径 Bore (mm)		总重量 Grand weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft	配套功率 Engine		进口 Inlet	出口 Outlet	
SLNC125-400C	1480	140.0	38.9	41.0	69.0	22.69	37	3.5	150	125	615
		200.0	55.6	38.0	72.0	28.76					
		240.0	66.7	33.4	71.5	30.59					
SLNC125-400D	1480	126.0	35.0	34.6	63.5	18.69	30	3.5	150	125	602
		180.0	50.0	32.0	67.7	23.18					
		216.0	60.0	28.2	67.0	24.74					
SLNC150-200	1480	262.5	72.9	14.0	77.0	12.99	18.5	4.5	200	150	570
		375.0	140.1	12.0	86.9	14.10					
		450.0	125.0	10.0	81.0	15.12					
SLNC150-200A	1480	252.0	70.0	12.0	76.0	10.83	15	4.5	200	150	564
		360.0	100.0	10.5	84.0	12.25					
		432.0	120.0	9.5	78.0	14.32					
SLNC150-200B	1480	231.0	64.1	10.5	72.0	9.17	15	4.5	200	150	558
		330.0	91.6	9.5	78.9	10.82					
		396.0	110.0	7.5	71.0	11.39					
SLNC150-250	1480	266.0	73.9	21.1	73.7	20.71	30	4.5	200	150	445
		380.0	105.6	19.5	80.1	25.21					
		456.0	126.7	17.2	77.5	27.51					
SLNC150-250A	1480	252.0	70.0	19.4	73.3	18.21	30	4.5	200	150	443
		360.0	100.0	18.0	79.6	22.18					
		432.0	120.0	15.8	77.1	24.19					
SLNC150-250B	1480	231.0	64.2	16.2	72.6	14.05	22	4.5	200	150	450
		330.0	91.7	15.0	79.0	17.07					
		396.0	110.0	13.2	76.8	18.55					
SLNC150-250C	1480	217.0	60.3	15.1	71.6	12.49	22	4.5	200	150	487
		310.0	86.1	14.0	77.8	15.20					
		372.0	103.3	12.3	75.5	16.54					
SLNC150-315	1480	266.0	73.9	33.5	72.8	33.34	55	4.0	200	150	794
		380.0	105.6	31.0	79.2	40.53					
		456.0	126.7	27.3	76.1	44.54					
SLNC150-315A	1480	252.0	70.0	29.2	72.3	27.70	45	4.0	200	150	680
		360.0	100.0	27.0	78.3	33.83					
		432.0	120.0	23.8	75.1	37.24					
SLNC150-315B	1480	231.0	64.2	25.9	71.1	22.95	37	4.0	200	150	646
		330.0	91.7	24.0	76.8	28.10					
		396.0	110.0	21.1	74.1	30.76					
SLNC150-315C	1480	210.0	58.3	21.6	70.6	17.51	30	4.0	200	150	575
		300.0	83.3	20.0	75.8	21.57					
		360.0	100.0	17.6	73.6	23.46					
SLNC150-315D	1480	203.0	56.4	18.4	70.1	14.49	30	4.0	200	150	573
		290.0	80.6	17.0	75.0	17.91					
		348.0	96.7	15.0	72.6	19.54					

性能参数表 Performance parameters of the table

泵型号 Pump model	转速 n Speed (r/min)	流量 Q Capacity		扬程 Head (m)	效率 Efficiency (%)	功率 Power(kw)		必须汽蚀余量 (NPSH)r (m)	泵口径 Bore (mm)		总重量 Grand weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft	配套功率 Engine		进口 Inlet	出口 Outlet	
SLNC150-400	1480	266.0	73.9	55.1	76.2	52.39	75	4.0	200	150	1004
		380.0	105.6	51.0	81.8	64.56					
		456.0	126.7	44.9	79.5	70.15					
SLNC150-400A	1480	255.5	71.0	51.8	75.7	47.68	75	4.0	200	150	897
		365.0	101.4	48.0	80.9	59.01					
		438.0	121.7	42.2	77.8	64.80					
SLNC150-400B	1480	245.0	68.1	46.4	75.0	41.34	75	4.0	200	150	735
		350.0	97.2	43.0	80.1	51.20					
		420.0	116.7	37.8	76.9	56.32					
SLNC150-400C	1480	231.0	64.2	41.0	74.3	34.77	55	4.0	200	150	673
		330.0	91.7	38.0	79.1	43.20					
		396.0	110.0	33.4	76.0	47.48					
SLNC150-400D	1480	217.0	60.3	35.6	73.3	28.75	45	4.0	200	150	662
		310.0	86.1	33.0	78.2	35.65					
		372.0	103.3	29.0	75.1	39.20					
SLNC150-500	1480	329.0	91.3	98.0	69.2	126.88	200	4.5	200	150	1460
		470.0	130.5	90.0	75.1	153.39					
		564.0	156.6	78.0	72.0	166.39					
SLNC150-500A	1480	319.2	88.6	88.0	68.5	111.67	160	4.5	200	150	1170
		456.0	126.6	80.5	72.4	138.07					
		547.2	152.0	72.0	68.8	155.95					
SLNC150-500B	1480	301.0	83.6	82.0	67.2	100.02	160	4.5	200	150	930
		430.0	119.4	77.0	71.5	126.11					
		516.0	143.3	73.0	69.0	148.66					
SLNC150-500C	1480	287.0	79.7	77.0	65.5	91.88	132	4.5	200	150	912
		410.0	113.8	70.0	70.6	110.70					
		492.0	136.6	59.0	69.0	114.56					
SLNC150-500D	1480	276.5	76.8	65.0	63.5	77.07	110	4.5	200	150	890
		395.0	109.7	60.0	69.7	92.60					
		474.0	131.6	55.0	65.5	108.39					
SLNC200-250	1480	308.0	85.5	15.5	74.0	17.56	22	4.5	250	200	727
		440.0	122.2	13.5	83.4	19.39					
		528.0	146.6	11.5	81.0	20.41					
SLNC200-250A	1480	301.0	83.6	15.0	74.0	16.61	22	4.5	250	200	649
		430.0	119.4	12.5	81.0	18.07					
		516.0	143.3	11.0	80.0	19.32					
SLNC200-250B	1480	287.0	79.7	13.0	71.0	14.31	18.5	4.5	250	200	584
		410.0	113.8	11.0	79.2	15.50					
		492.0	136.6	10.0	77.0	17.40					
SLNC200-250C	1480	280.0	77.7	11.5	70.0	12.52	18.5	4.5	250	200	571
		400.0	111.1	10.0	77.3	14.09					
		480.0	133.3	9.0	75.0	15.68					

性能参数表 Performance parameters of the table

泵型号 Pump model	转速 n Speed (r/min)	流量 Q Capacity		扬程 Head (m)	效率 Efficiency (%)	功率 Power(kw)		必须汽蚀余量 (NPSH)r (m)	泵口径 Bore (mm)		总重量 Grand weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft	配套功率 Engine		进口 Inlet	出口 Outlet	
SLNC200-315	1480	385.0	106.9	34.6	77.2	46.97	75	5.5	250	200	945
		550.0	152.8	32.0	82.6	58.06					
		660.0	183.3	28.2	78.0	64.93					
SLNC200-315A	1480	364.0	101.1	29.2	76.5	37.81	55	5.5	250	200	875
		520.0	144.4	27.0	81.0	47.23					
		624.0	173.3	23.8	77.0	52.47					
SLNC200-315B	1480	343.0	95.3	24.8	75.0	30.96	55	5.5	250	200	873
		490.0	136.1	23.0	79.3	38.73					
		588.0	163.3	20.2	76.0	42.67					
SLNC200-315C	1480	322.0	89.4	21.6	73.7	25.72	45	5.5	250	200	701
		460.0	127.8	20.0	78.1	32.10					
		552.0	153.3	17.6	74.0	35.78					
SLNC200-400	1480	385.0	106.9	47.5	74.0	67.37	110	5.5	250	200	1396
		550.0	152.8	44.0	78.9	83.58					
		660.0	183.3	38.7	75.5	92.24					
SLNC200-400A	1480	364.0	101.1	40.0	72.5	54.67	75	5.5	250	200	980
		520.0	144.4	37.0	77.0	68.09					
		624.0	173.3	32.6	73.5	75.33					
SLNC200-400B	1480	343.0	95.3	35.6	72.0	46.27	75	5.5	250	200	983
		490.0	136.1	33.0	75.9	58.05					
		588.0	163.3	29.0	73.0	63.74					
SLNC200-400C	1480	322.0	89.4	28.1	71.0	34.70	55	5.5	250	200	768
		460.0	127.8	26.0	74.5	43.75					
		552.0	153.3	22.9	71.5	48.13					
SLNC200-450	1480	462.0	128.3	64.8	73.0	111.75	160	5.5	250	200	1750
		660.0	183.3	60.0	78.2	137.99					
		792.0	220.0	52.8	76.0	149.94					
SLNC200-450A	1480	441.0	122.5	58.3	71.5	98.02	160	5.5	250	200	1680
		630.0	175.0	54.0	75.5	122.79					
		756.0	210.0	47.5	73.0	134.10					
SLNC200-450B	1480	420.0	116.7	52.9	70.5	85.91	132	5.5	250	200	1570
		600.0	166.7	49.0	74.5	107.54					
		720.0	200.0	43.1	71.0	119.16					
SLNC200-450C	1480	399.0	110.8	47.5	70.0	73.81	110	5.5	250	200	1460
		570.0	158.3	44.0	73.5	92.98					
		684.0	190.0	38.7	70.5	102.37					
SLNC200-450D	1480	378.0	105.0	43.2	69.0	64.49	90	5.5	250	200	1350
		540.0	150.0	40.0	73.0	80.63					
		648.0	180.0	35.2	70.0	88.79					
SLNC250-315	1480	560.0	155.5	24.0	76.0	48.15	75	5.0	300	250	1377
		800.0	222.2	22.0	83.0	57.74					
		960.0	266.6	18.0	79.0	59.56					

性能参数表 Performance parameters of the table





泵型号 Pump model	转速 n Speed (r/min)	流量 Q Capacity		扬程 Head (m)	效率 Efficiency (%)	功率 Power(kw)		必须汽蚀余量 (NPSH)r (m)	泵口径 Bore (mm)		总重量 Grand weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft	配套功率 Engine		进口 Inlet	出口 Outlet	
SLNC250-315A	1480	546.0	151.6	23.0	75.8	45.11	75	5.0	300	250	1093
		780.0	216.6	21.0	79.0	56.46					
		936.0	260.0	17.0	78.2	55.41					
SLNC250-315B	1480	525.0	145.8	22.0	72.0	43.68	55	5.0	300	250	988
		750.0	208.3	19.0	77.5	50.07					
		900.0	250.0	16.0	76.0	51.59					
SLNC250-315C	1480	490.0	136.1	18.0	72.0	33.36	55	5.0	300	250	828
		700.0	194.4	17.0	77.5	41.81					
		840.0	233.3	15.0	76.0	45.14					
SLNC250-355	1480	640.0	177.7	41.0	78.0	91.61	132	5.5	300	250	1508
		800.0	222.2	37.0	80.5	100.13					
		960.0	266.6	34.0	79.0	112.51					
SLNC250-355A	1480	608.0	168.8	37.0	77.0	79.56	110	5.5	300	250	1510
		760.0	211.1	33.0	78.0	87.56					
		912.0	253.3	27.0	77.5	86.52					
SLNC250-355B	1480	576.0	160.0	31.0	76.0	63.98	90	5.5	300	250	1470
		720.0	200.0	28.0	77.2	71.11					
		864.0	240.0	24.0	76.8	73.52					
SLNC250-355C	1480	520.0	144.4	26.0	74.0	49.75	75	5.5	300	250	1420
		650.0	180.5	24.0	75.6	56.19					
		780.0	216.6	21.0	75.0	59.47					
SLNC250-400	1480	560.0	155.5	61.0	75.0	124.03	200	5.0	300	250	1600
		800.0	222.2	56.0	83.0	146.99					
		960.0	266.6	51.0	80.0	166.66					
SLNC250-400A	1480	539.0	149.7	52.0	73.0	104.56	160	5.0	300	250	1535
		770.0	213.8	47.0	79.0	124.75					
		924.0	256.6	42.0	76.0	139.06					
SLNC250-400B	1480	518.0	143.8	44.0	73.0	85.02	132	5.0	300	250	1391
		740.0	205.5	40.0	78.0	103.34					
		888.0	246.6	34.0	76.0	108.18					
SLNC250-400C	1480	490.0	136.1	33.0	72.0	61.16	90	5.0	300	250	1383
		700.0	194.4	31.0	76.0	77.75					
		840.0	233.3	26.0	75.0	79.30					
SLNC300-400	1480	840.0	233.3	44.0	70.0	143.79	200	7.5	350	300	1900
		1200.0	333.3	41.0	79.5	168.53					
		1440.0	400.0	38.0	78.9	188.87					
SLNC300-400A	1480	770.0	213.8	37.0	70.0	110.83	160	7.5	350	300	1810
		1100.0	305.5	35.0	79.0	132.71					
		1320.0	366.6	32.0	78.9	145.79					
SLNC300-400B	1480	700.0	194.4	34.0	69.5	93.25	132	7.5	350	300	1800
		1000.0	277.7	32.0	78.5	111.01					
		1200.0	333.3	30.0	78.9	124.25					





性能参数表 Performance parameters of the table

泵型号 Pump model	转速 n Speed (r/min)	流量 Q Capacity		扬程 Head (m)	效率 Efficiency (%)	功率 Power(kw)		必须汽蚀余量 (NPSH)r (m)	泵口径 Bore (mm)		总重量 Grand weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft	配套功率 Engine		进口 Inlet	出口 Outlet	
SLNC300-400C	1480	686.0	190.5	27.0	69.0	73.10	110	7.5	350	300	1640
		980.0	272.2	25.0	77.0	86.65					
		1176.0	326.6	23.0	76.0	96.92					
SLNC300-450	1480	840.0	233.3	57.0	77.5	168.24	250	7.5	350	300	2010
		1200.0	333.3	50.0	81.7	199.99					
		1440.0	400.0	43.0	78.9	213.72					
SLNC300-450A	1480	770.0	213.8	47.0	76.5	128.83	200	7.5	350	300	1950
		1100.0	305.5	44.0	80.8	163.12					
		1320.0	366.6	37.0	78.9	168.57					
SLNC300-450B	1480	700.0	194.4	41.0	76.0	102.84	160	7.5	350	300	1860
		1000.0	277.7	38.0	79.8	129.68					
		1200.0	333.3	32.0	78.0	134.07					
SLNC300-450C	1480	630.0	175.0	35.0	75.0	80.06	132	7.5	350	300	1750
		900.0	250.0	33.0	78.5	103.03					
		1080.0	300.0	29.0	77.0	110.77					
SLNC350-450	980	1400.0	388.8	24.0	76.2	120.08	160	6.5	400	350	1250
		2000.0	555.5	20.0	80.6	135.15					
		2400.0	666.6	15.0	77.8	126.01					
SLNC350-450A	980	1302.0	361.6	21.0	76.0	97.97	132	6.5	400	350	950
		1860.0	516.6	17.0	79.3	108.58					
		2232.0	620.0	14.0	77.0	110.51					
SLNC350-500	980	1400.0	388.8	35.0	77.0	173.30	250	6.5	400	350	1700
		2000.0	555.5	32.0	82.8	210.49					
		2400.0	666.6	27.0	78.8	223.94					
SLNC350-500A	980	1302.0	361.6	30.0	77.0	138.14	200	6.5	400	350	1580
		1860.0	516.6	28.0	81.9	173.17					
		2232.0	620.0	24.0	79.0	184.66					
SLNC350-500B	980	1225.0	340.2	25.0	78.2	106.65	160	6.5	400	350	1510
		1750.0	486.1	24.0	80.9	141.38					
		2100.0	583.3	21.0	79.0	152.02					
SLNC350-600	980	1400.0	388.8	54.0	77.6	265.31	355	6.5	400	350	2600
		2000.0	555.5	50.0	82.8	328.90					
		2400.0	666.6	42.0	80.0	343.13					
SLNC350-600A	980	1302.0	361.6	47.0	77.8	214.20	315	6.5	400	350	2450
		1860.0	516.6	44.0	81.9	272.13					
		2232.0	620.0	37.0	79.8	281.83					
SLNC350-600B	980	1225.0	340.2	41.0	77.6	176.26	250	6.5	400	350	2310
		1750.0	486.1	38.0	80.9	223.85					
		2100.0	583.3	32.0	79.5	230.19					
SLNC350-600C	980	980.0	272.2	39.0	77.0	135.17	200	6.5	400	350	2200
		1400.0	388.8	35.0	80.0	166.80					
		1680.0	466.6	31.0	79.0	179.53					







性能曲线图 Performance curve

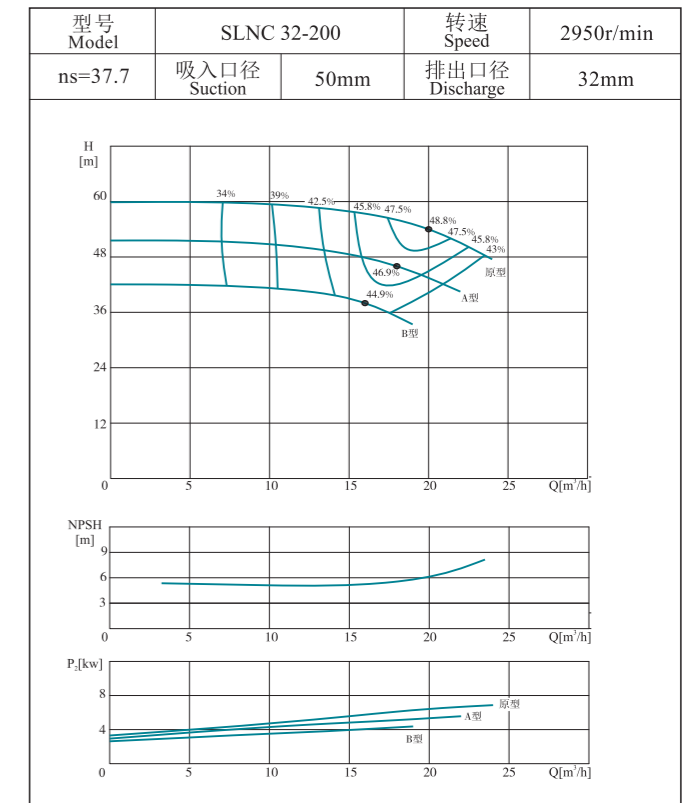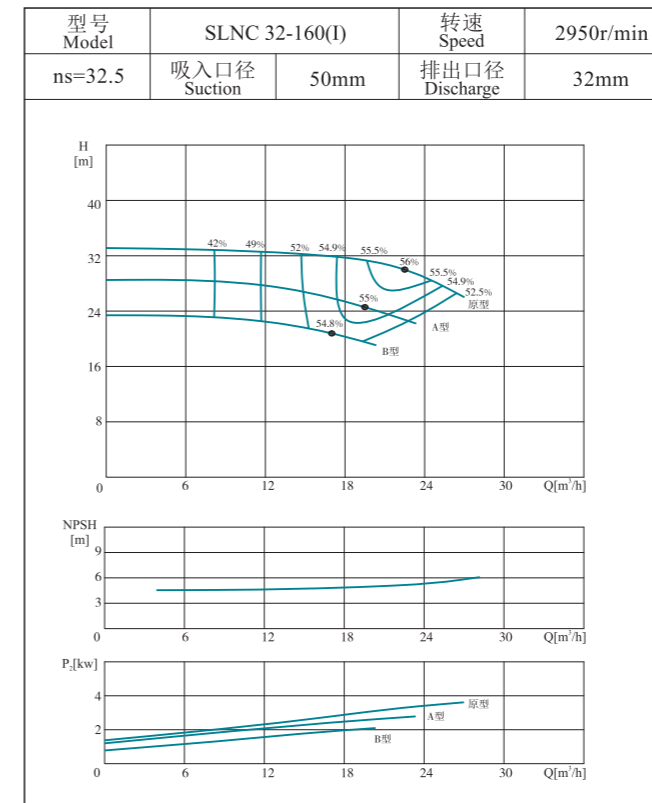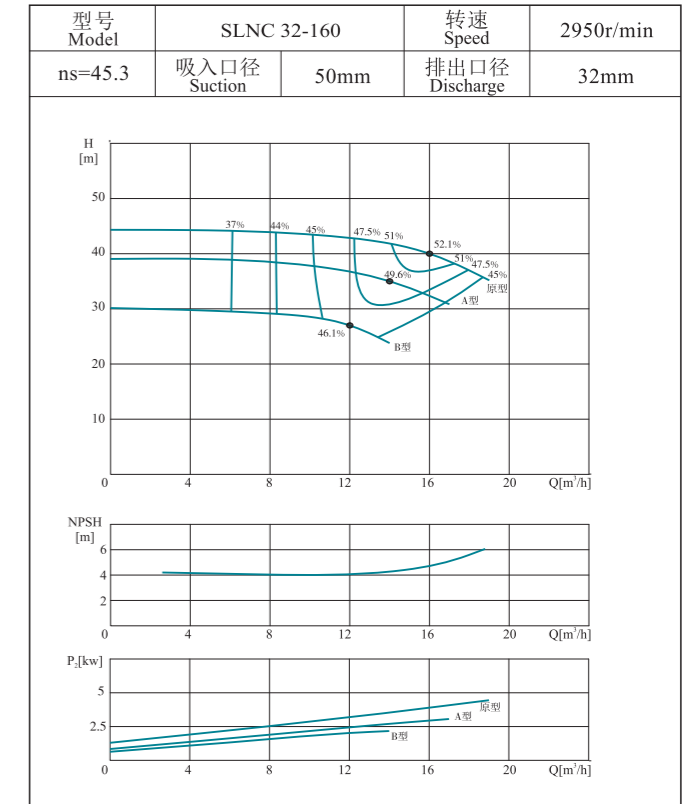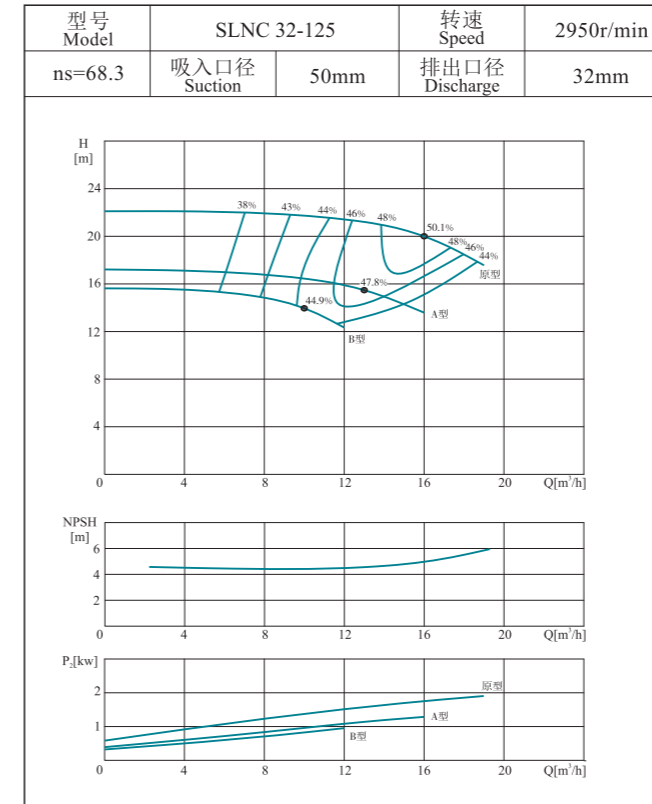



#### 性能曲线图 Performance curve

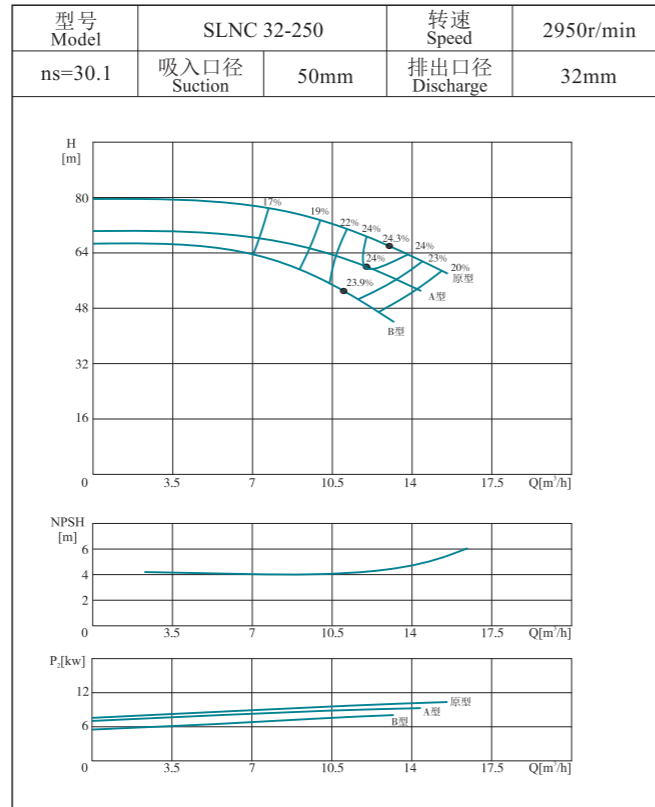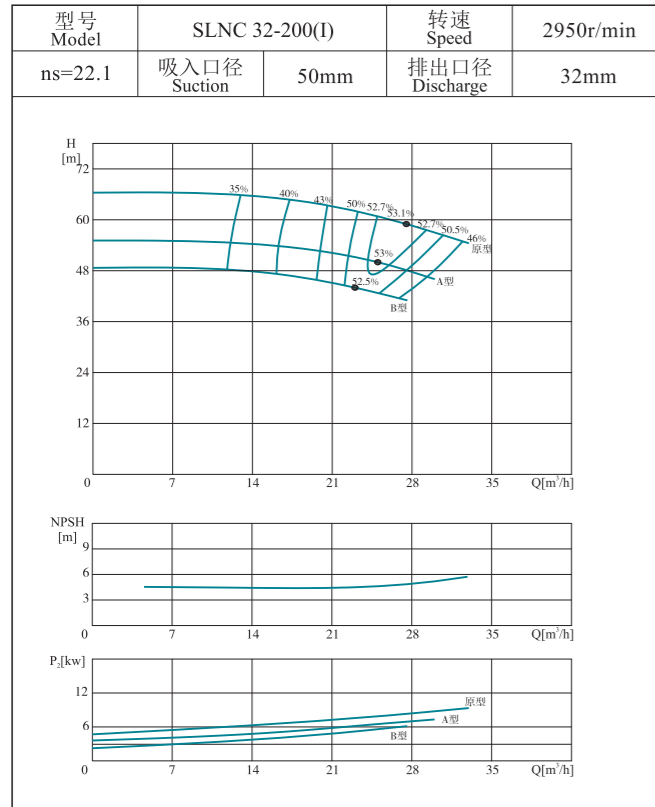







#### 性能曲线图 Performance curve

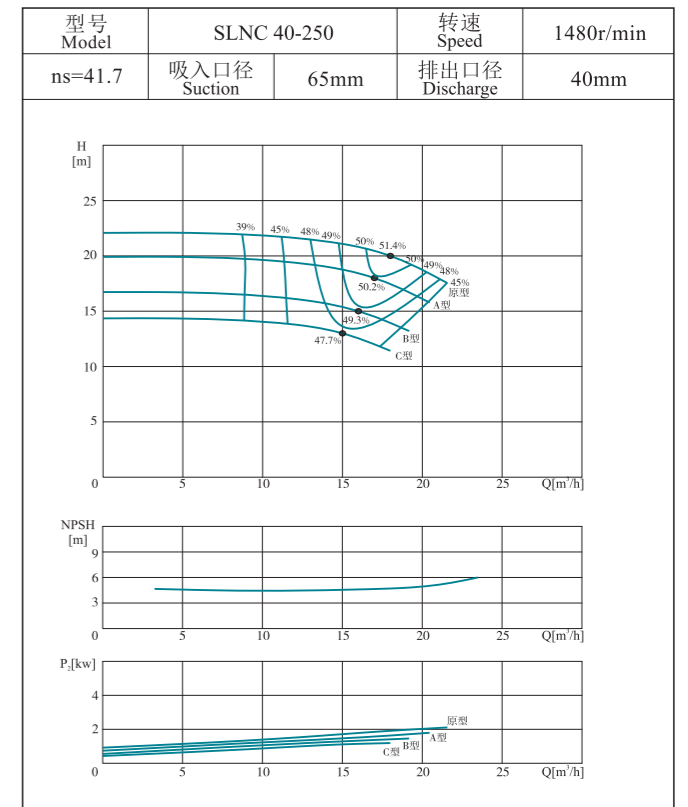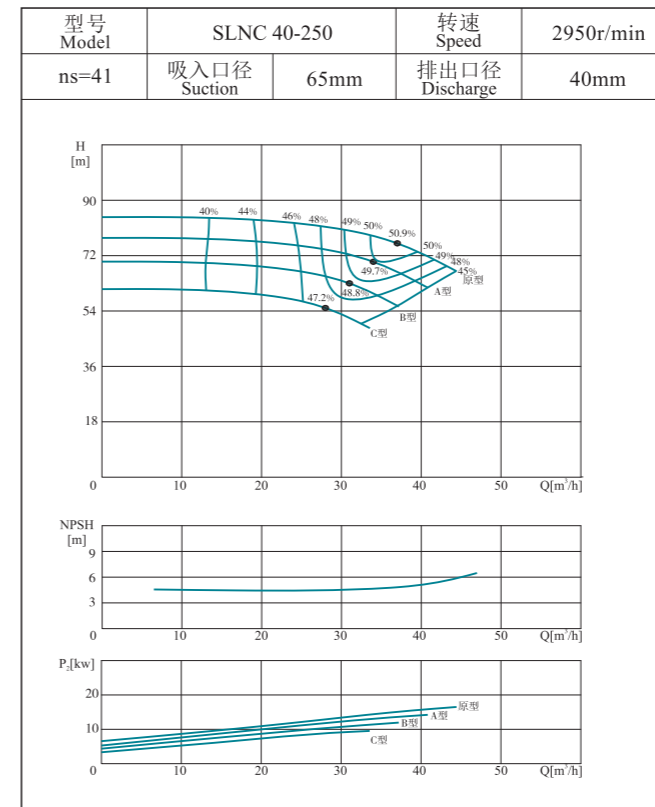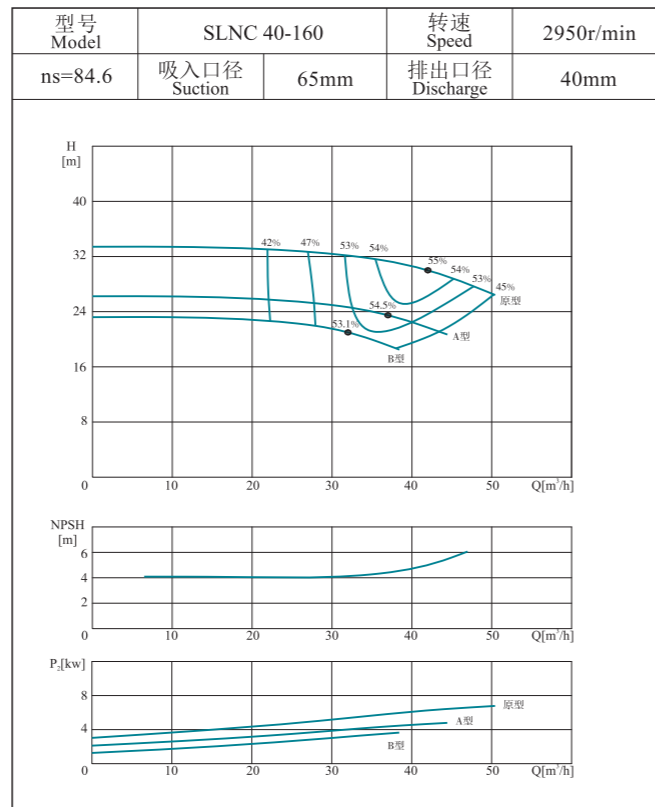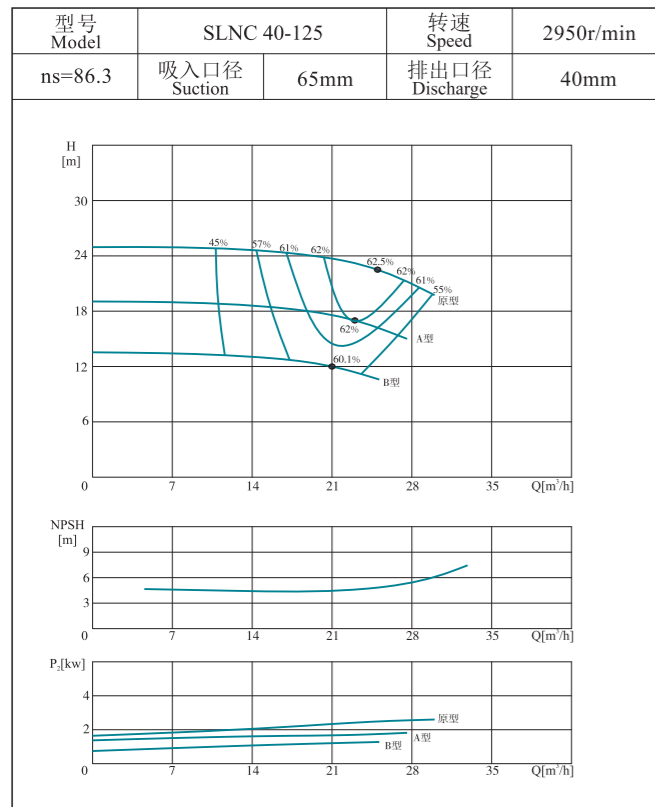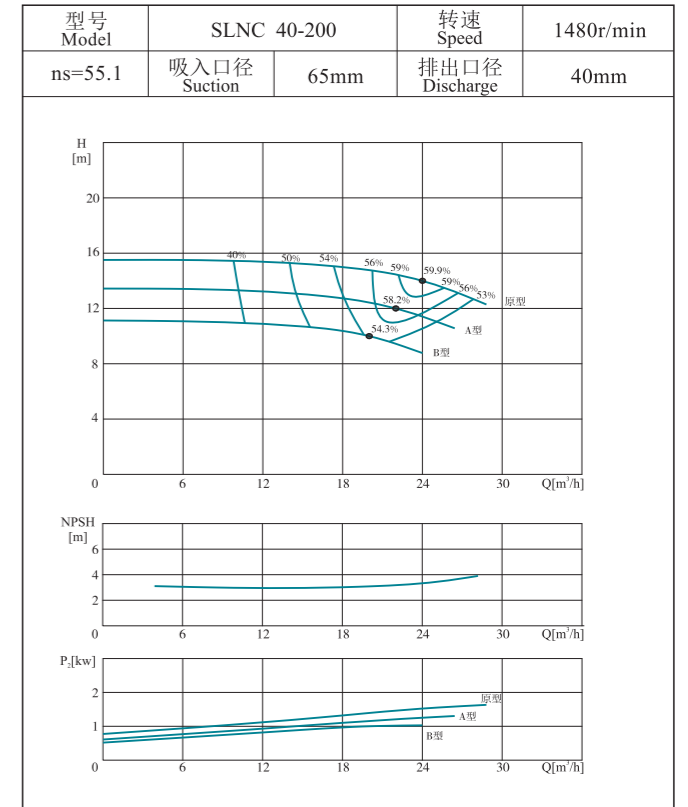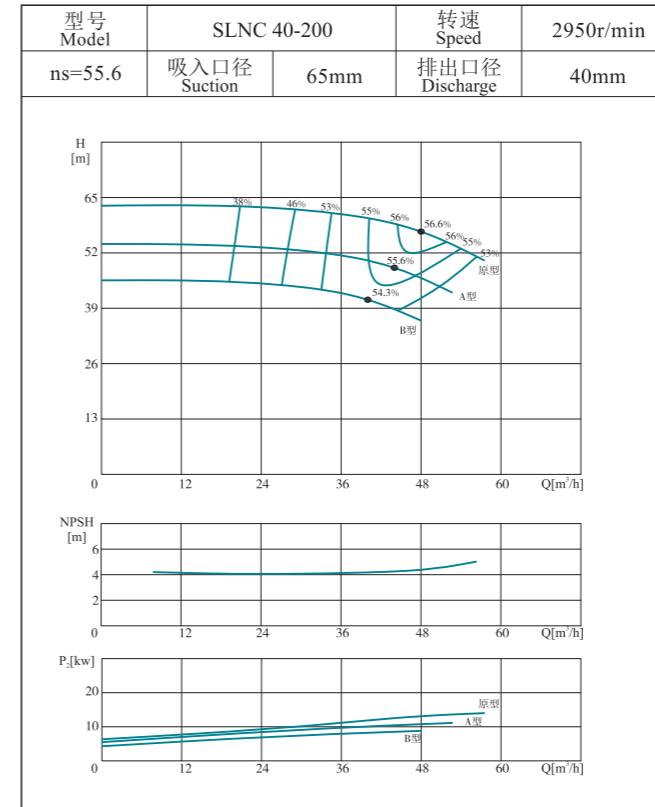

#### 性能曲线图 Performance curve

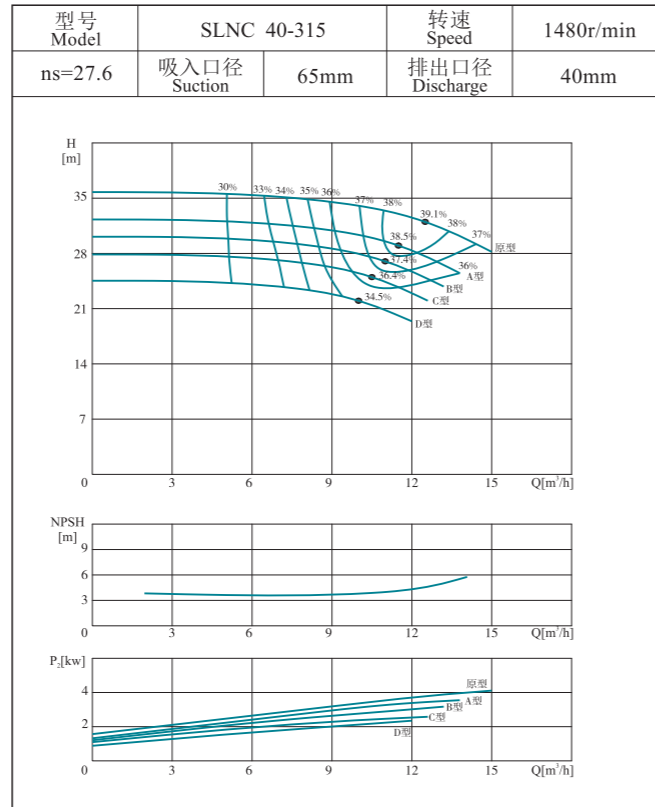
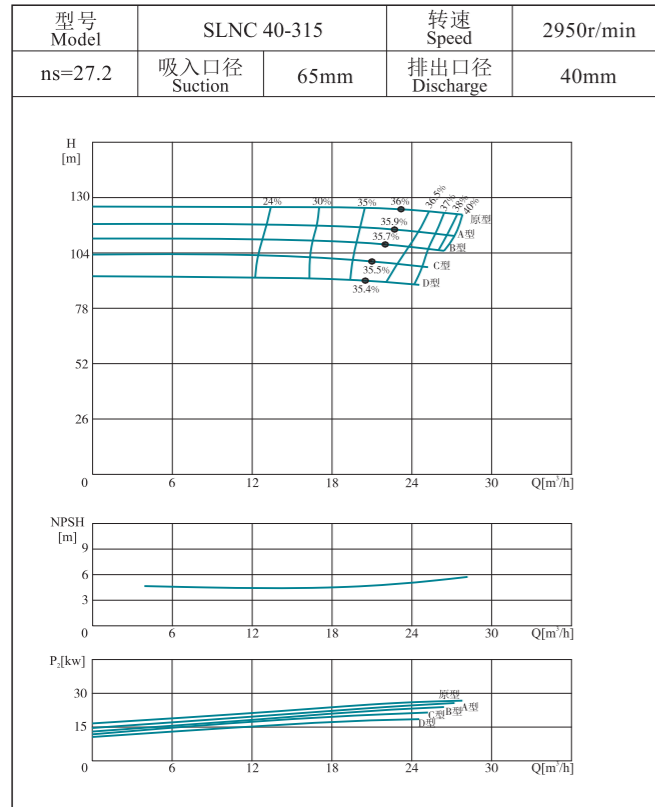


#### 性能曲线图 Performance curve

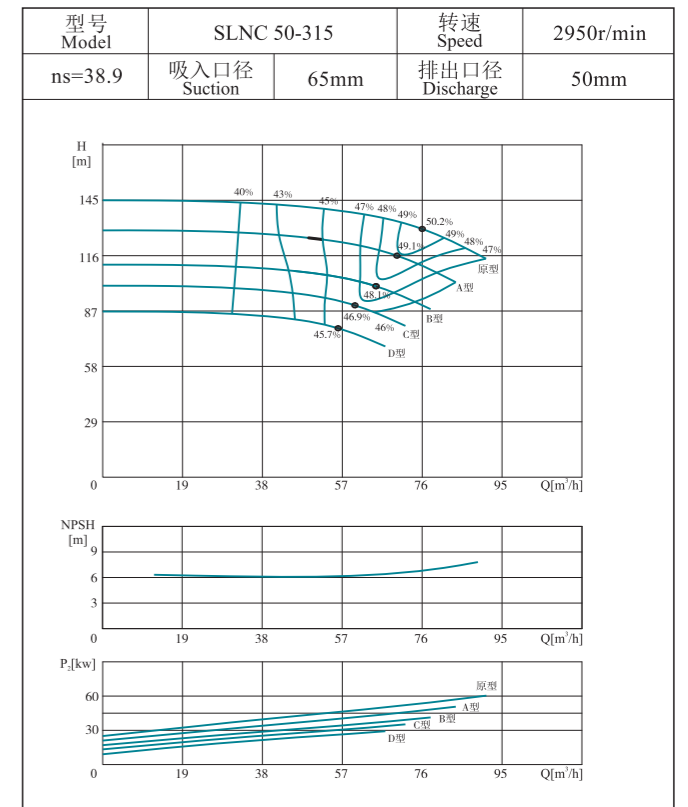
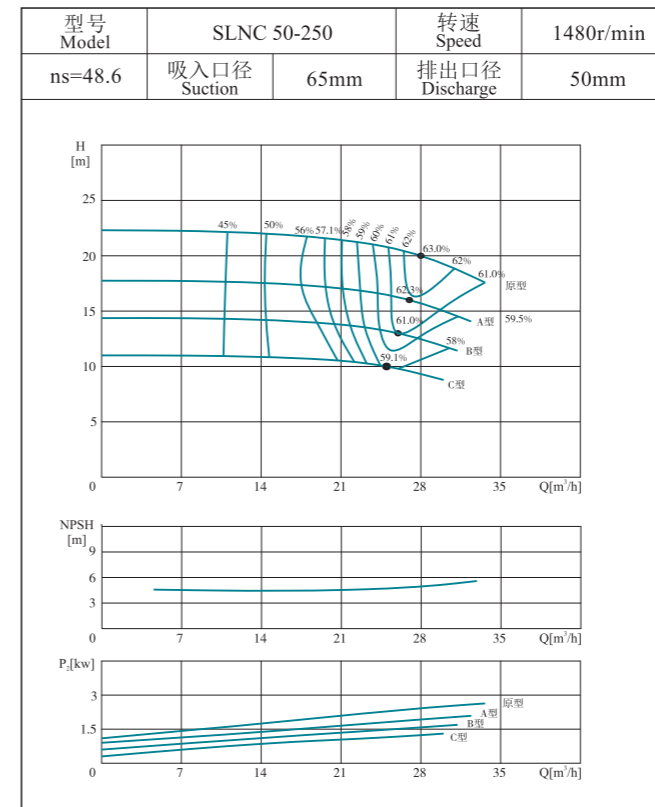
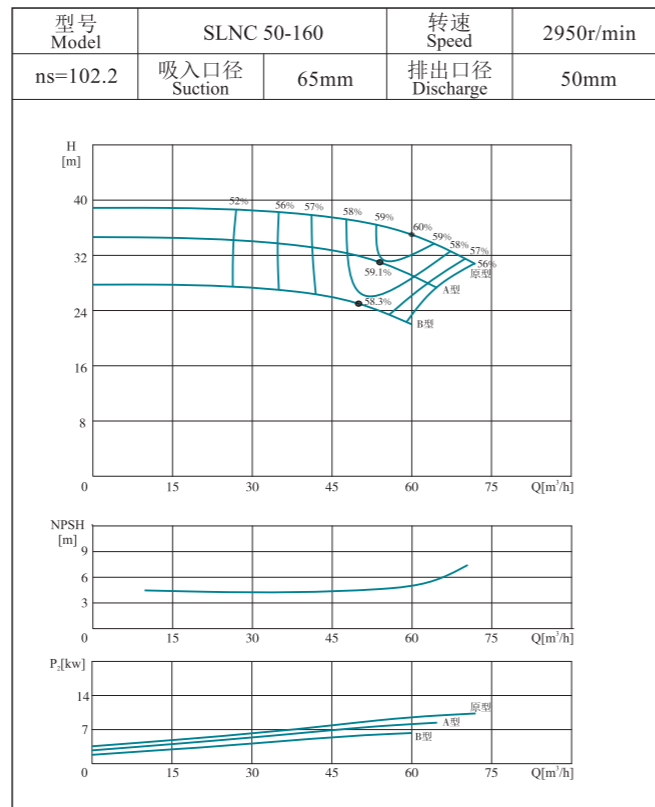
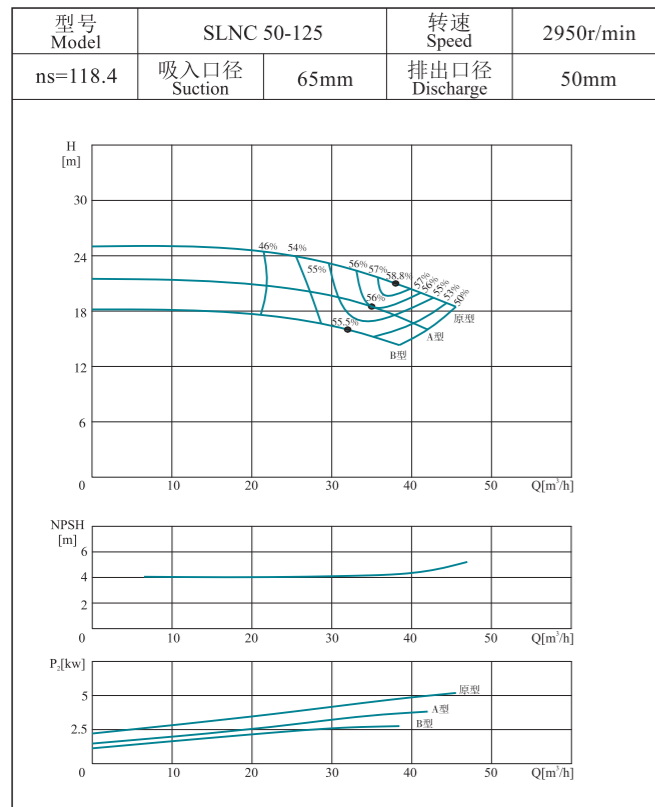
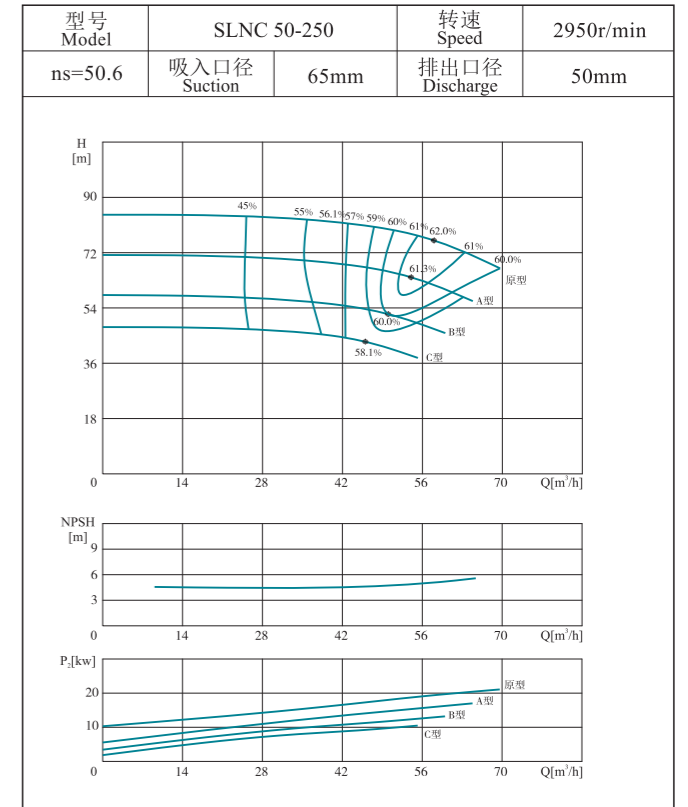
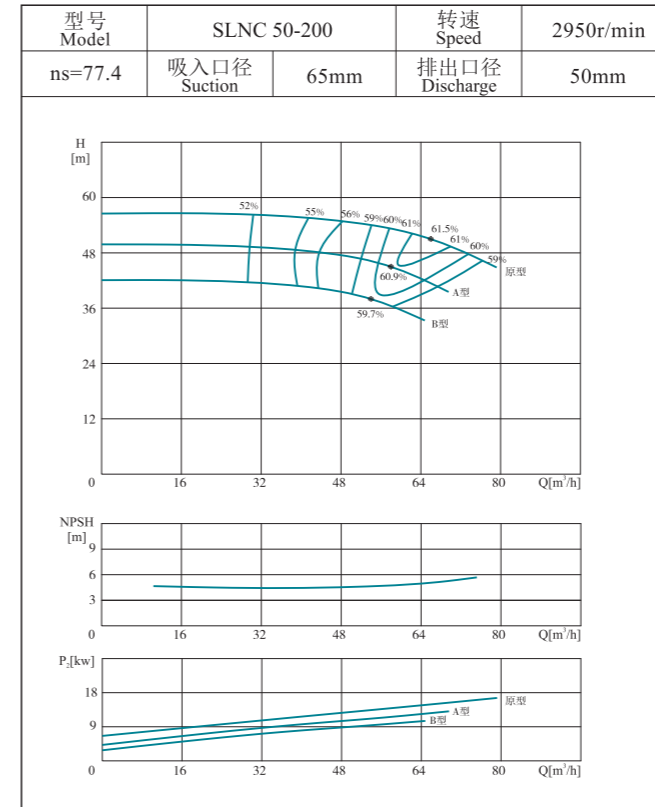






#### 性能曲线图 Performance curve

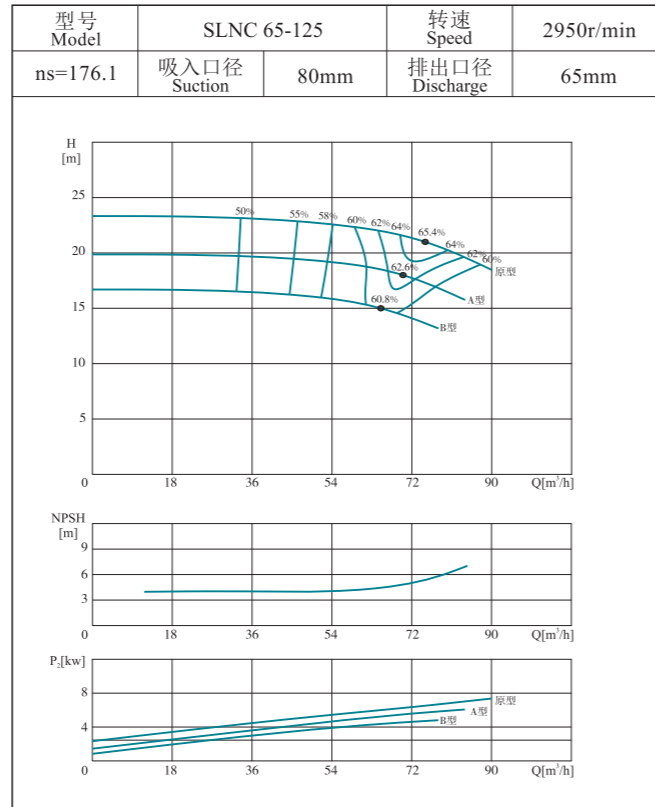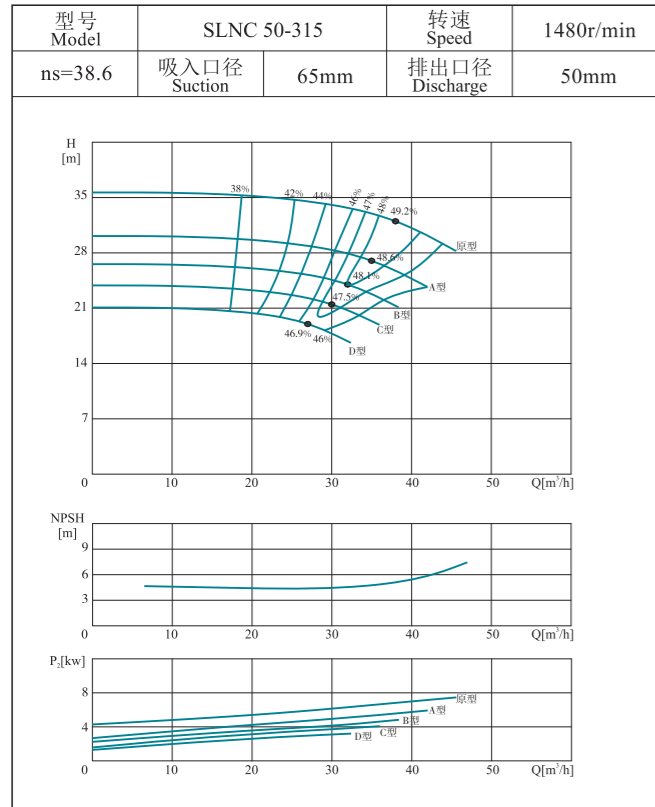







#### 性能曲线图 Performance curve

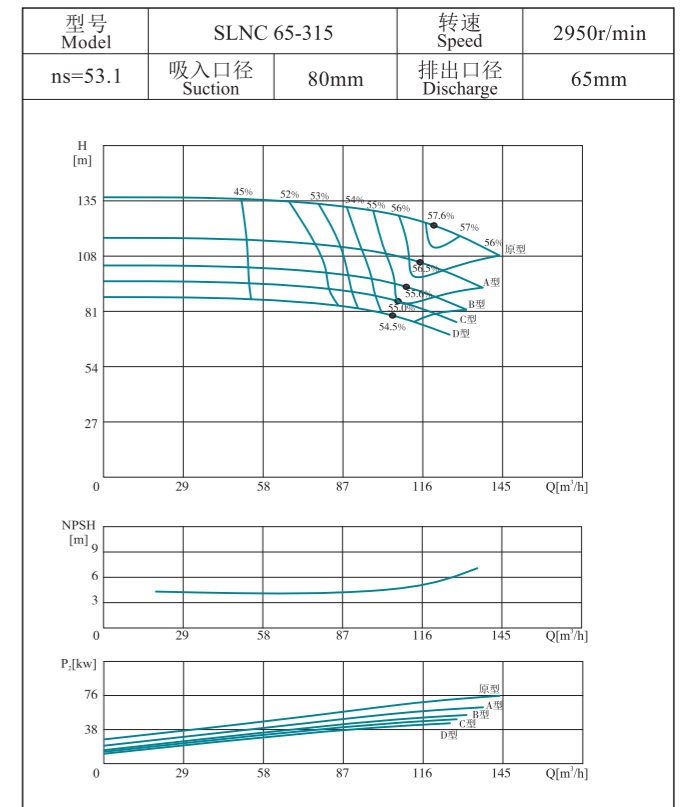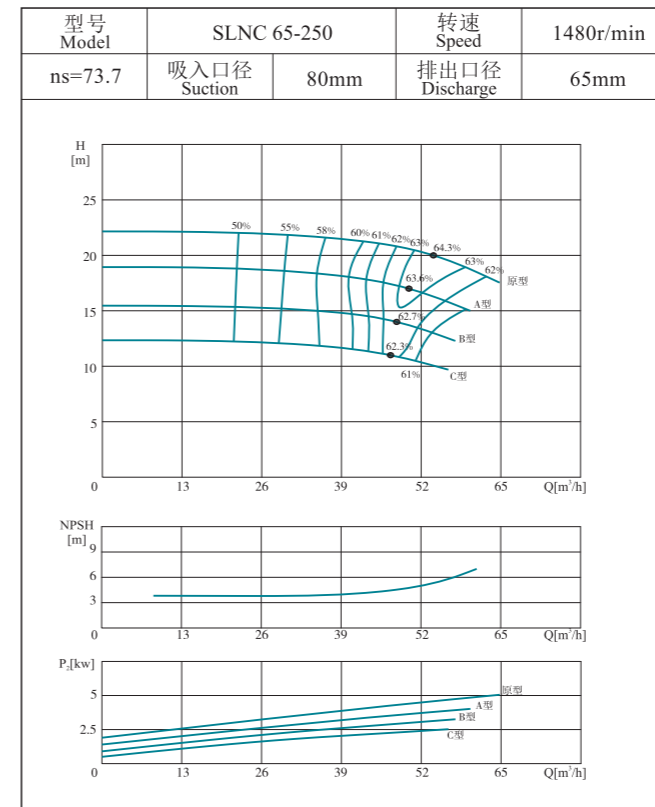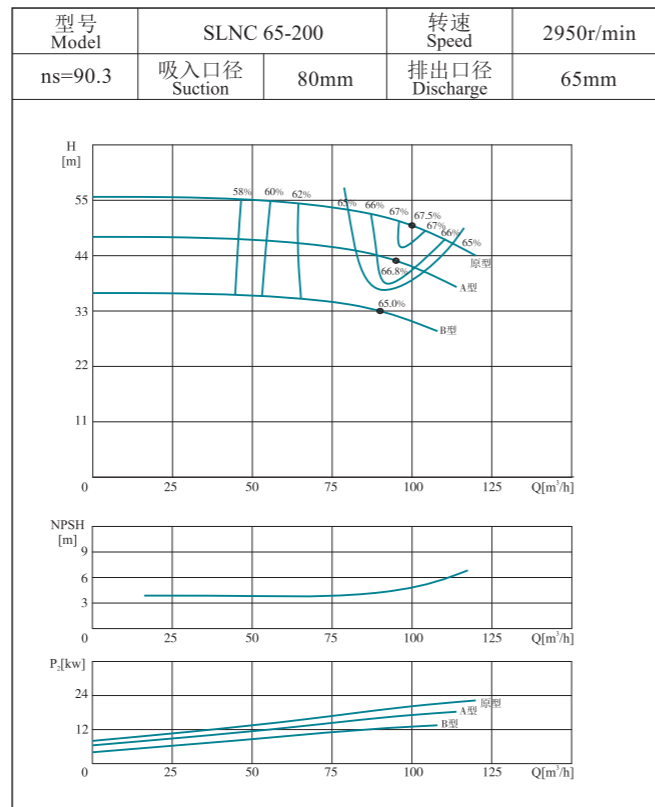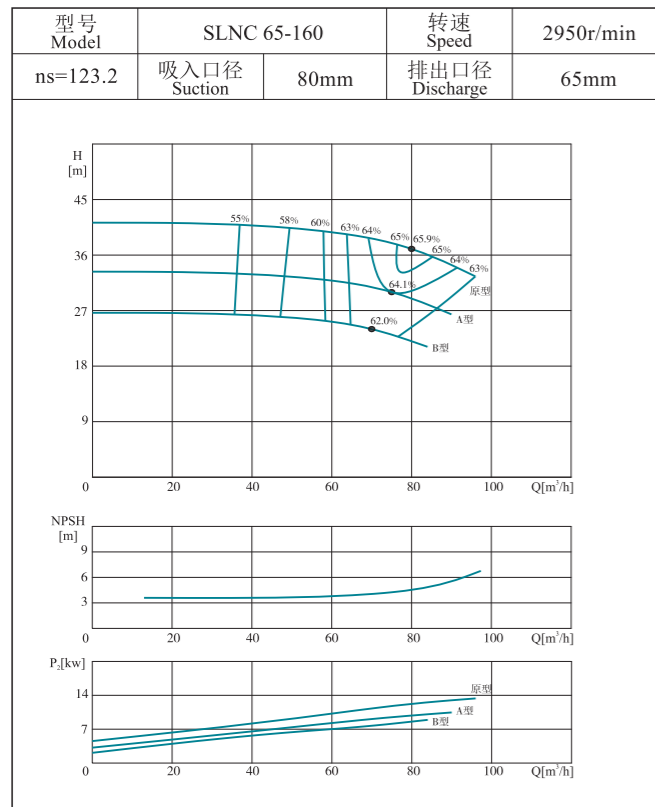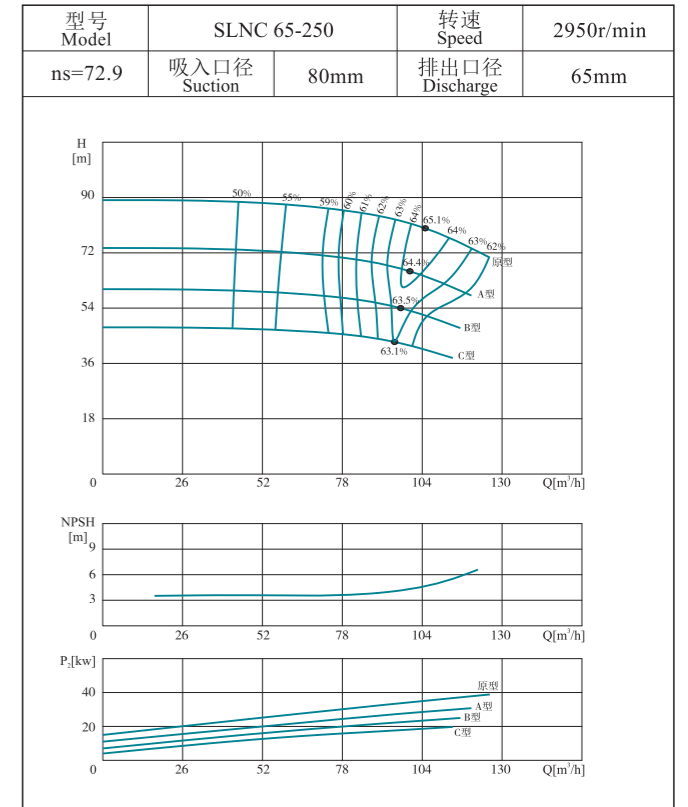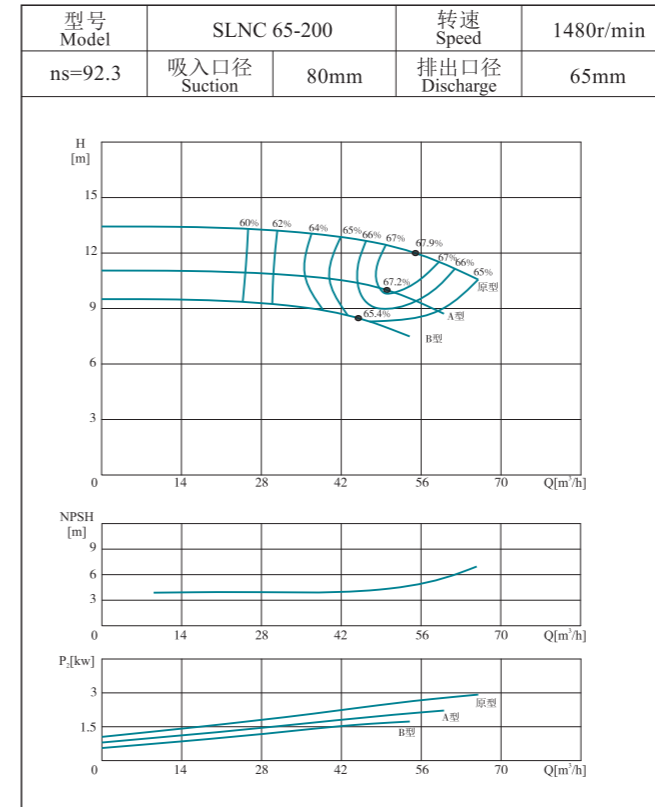



#### 性能曲线图 Performance curve

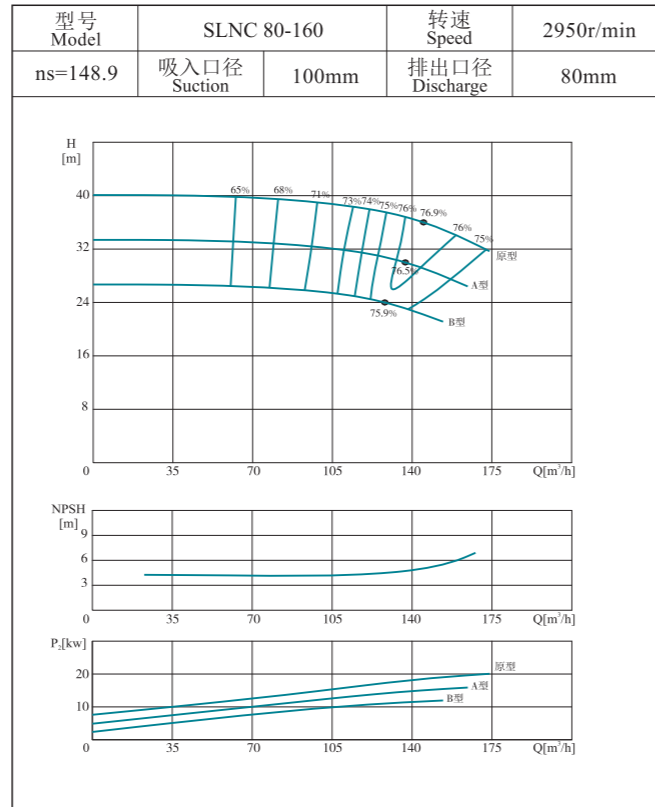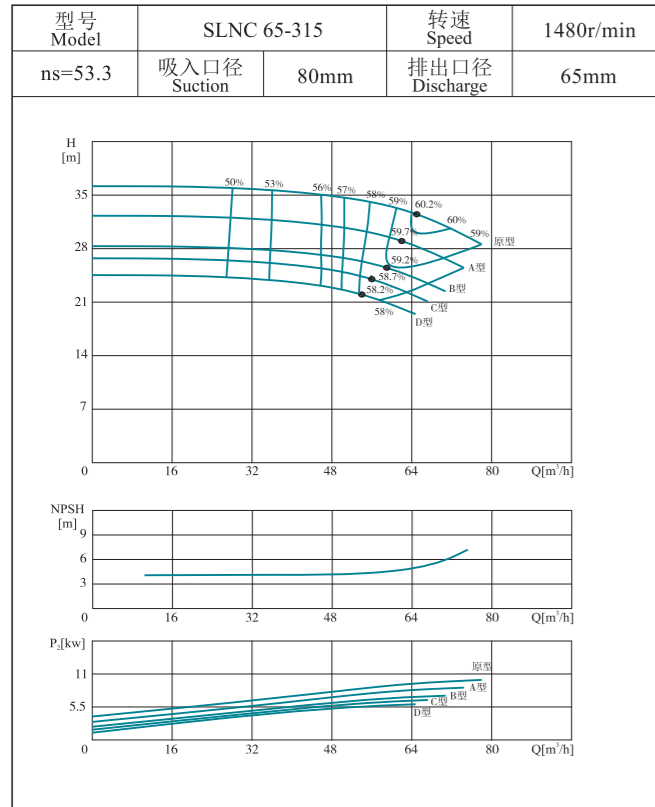







#### 性能曲线图 Performance curve

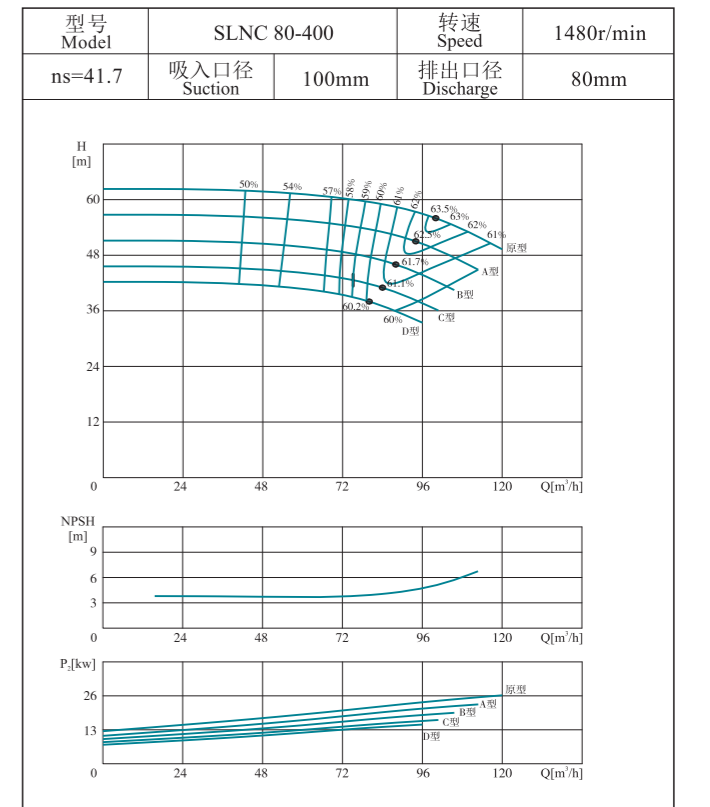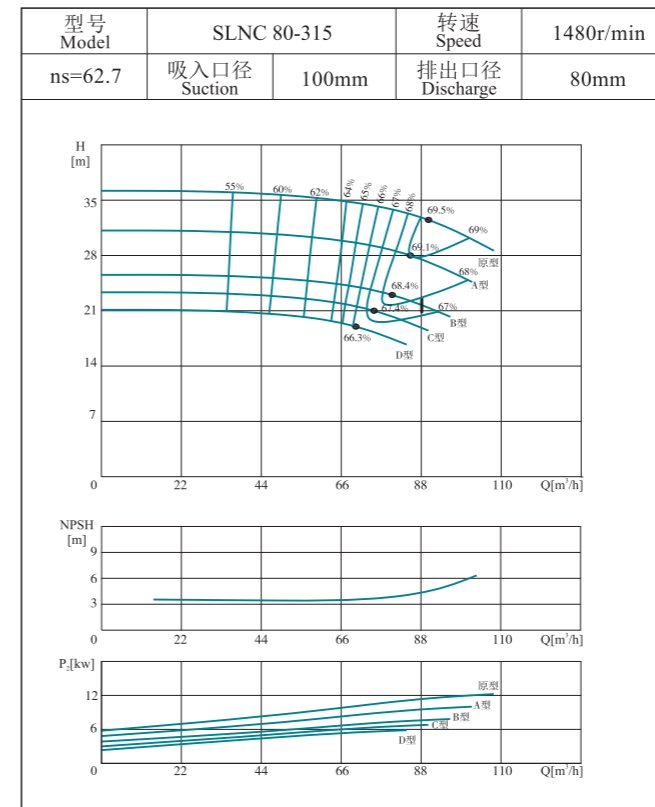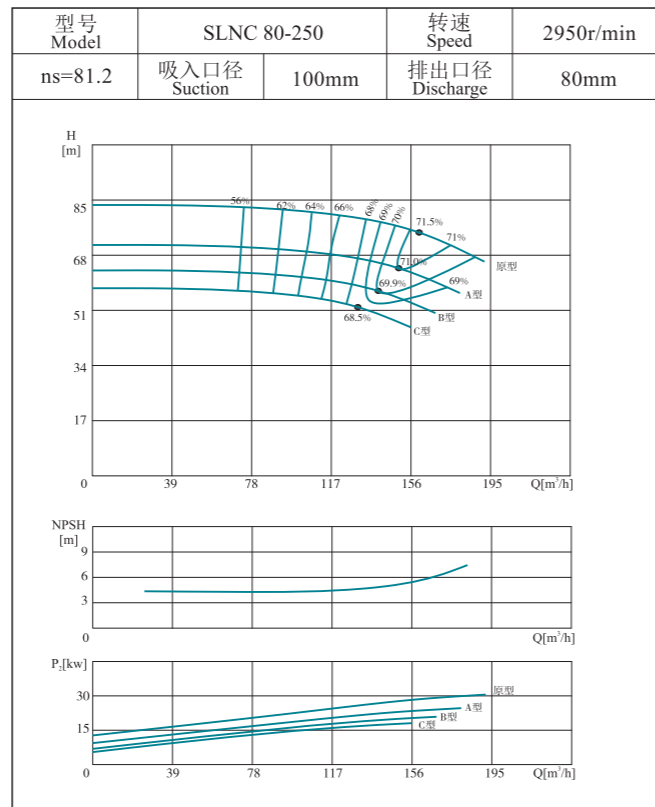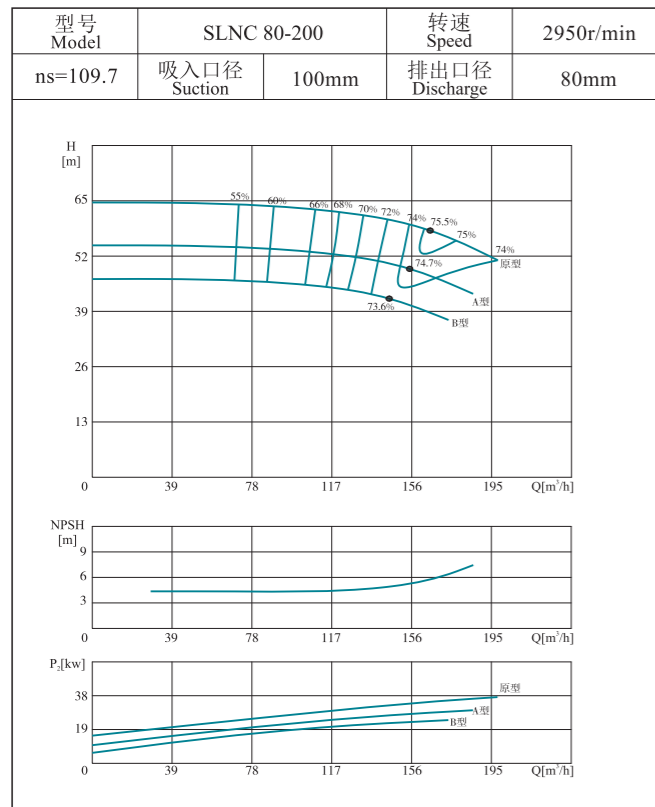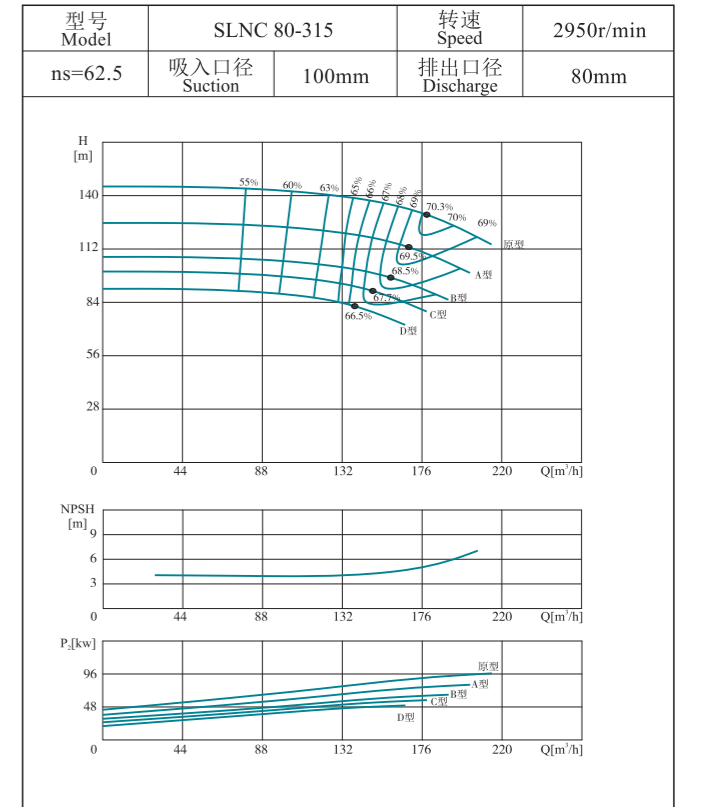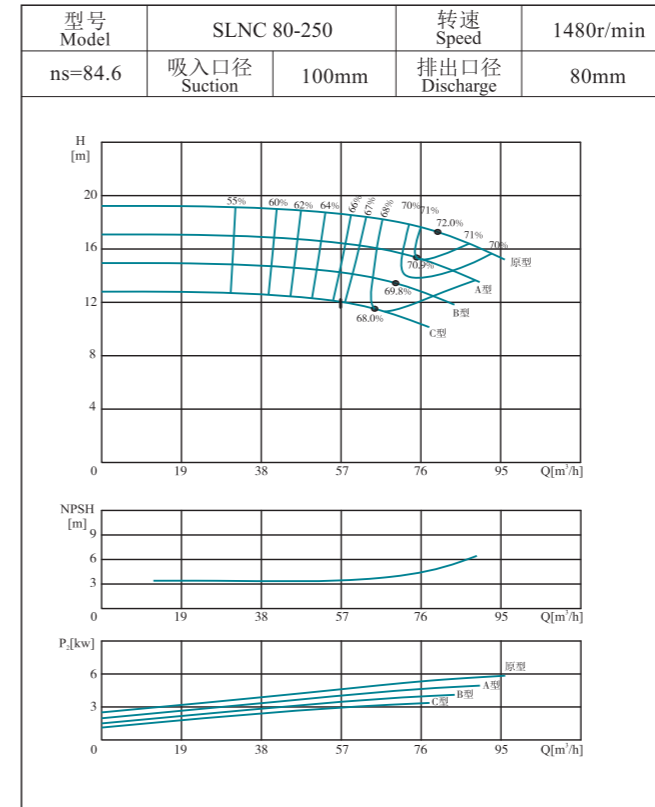

性能曲线图 Performance curve



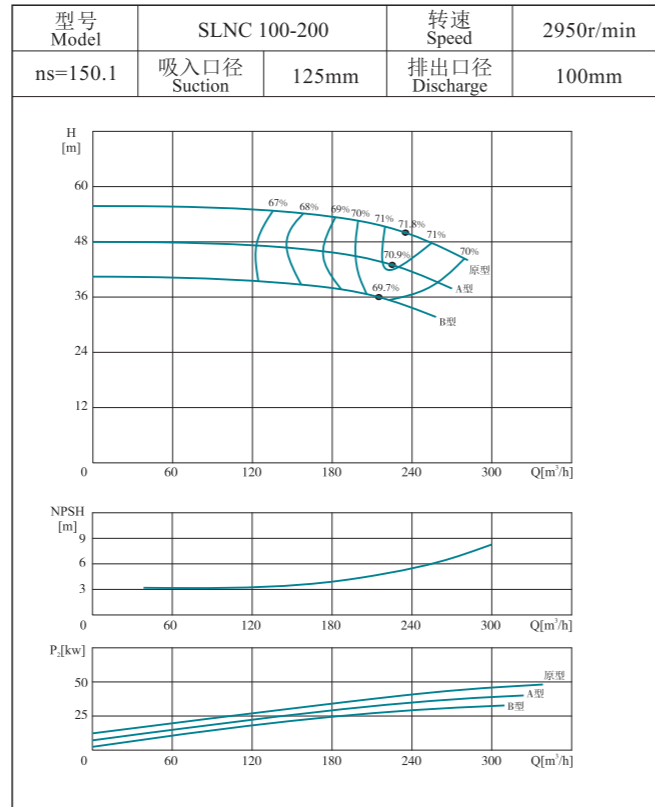
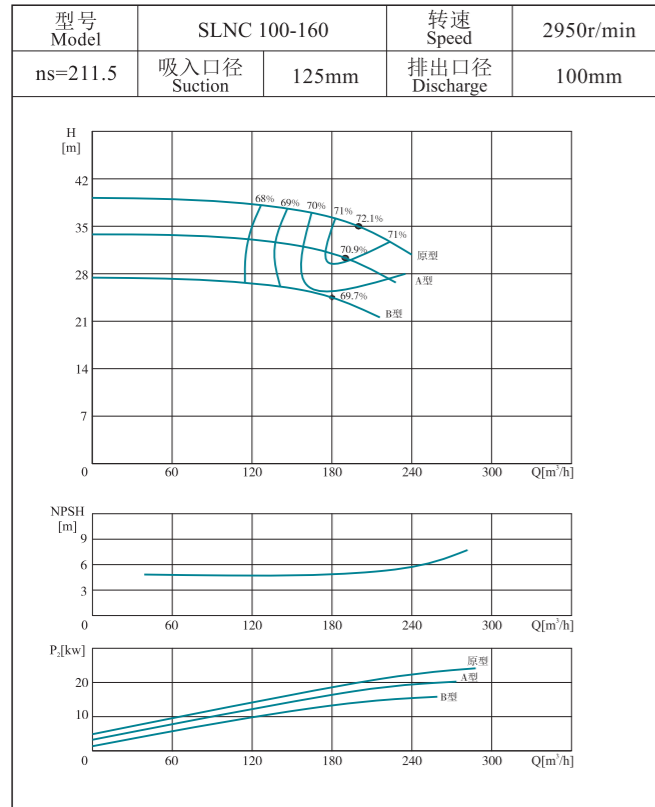


性能曲线图 Performance curve

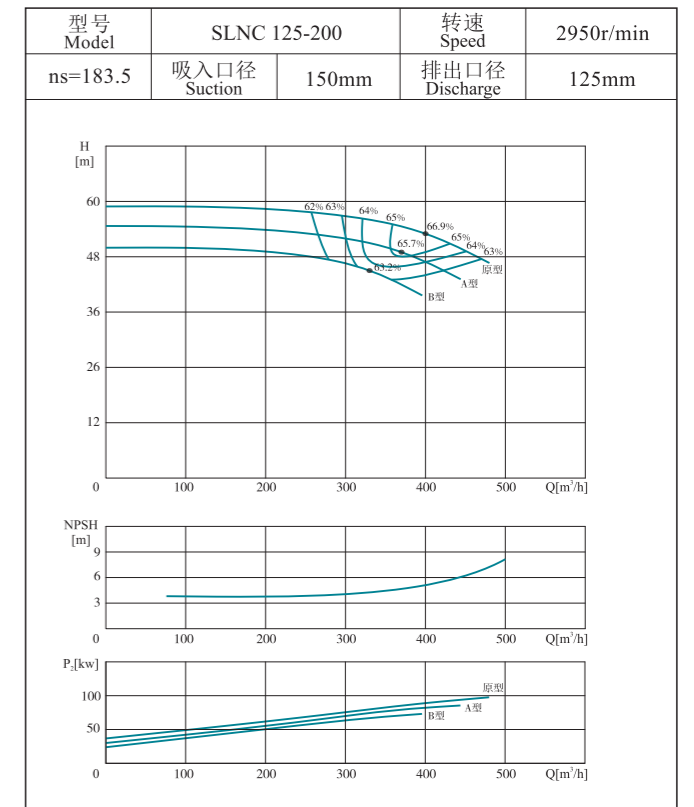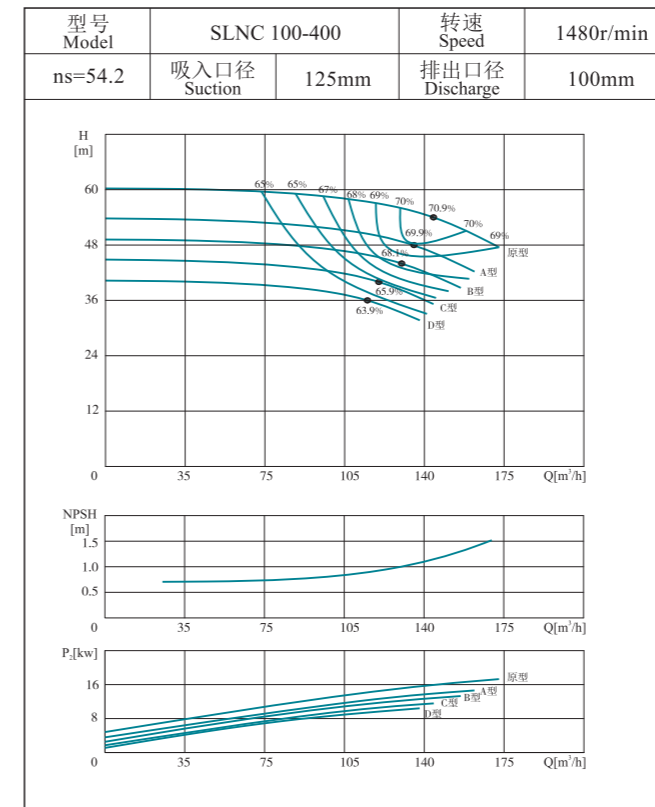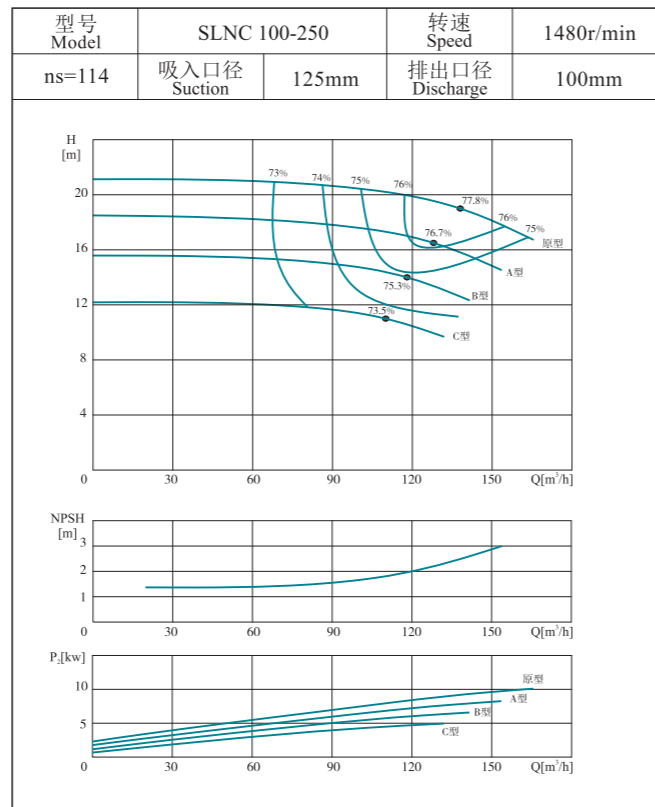
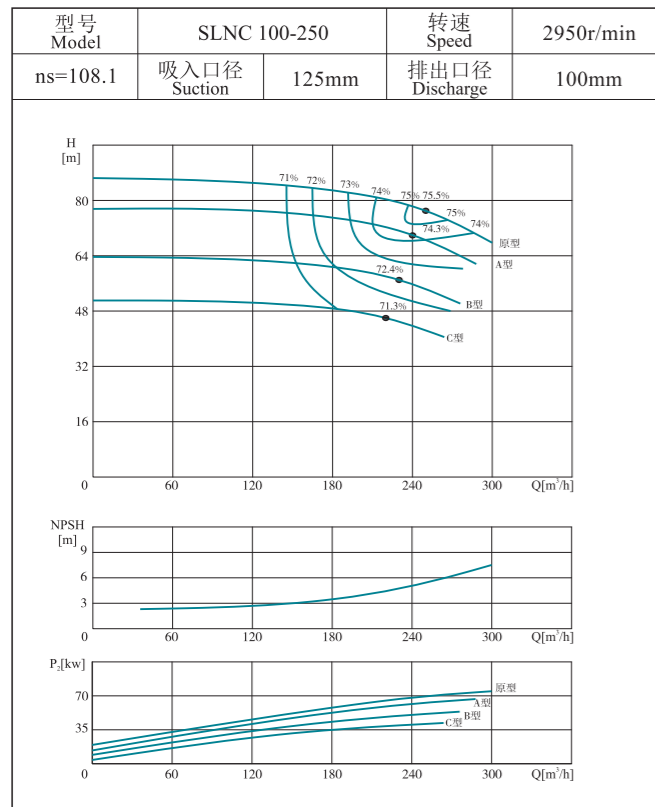
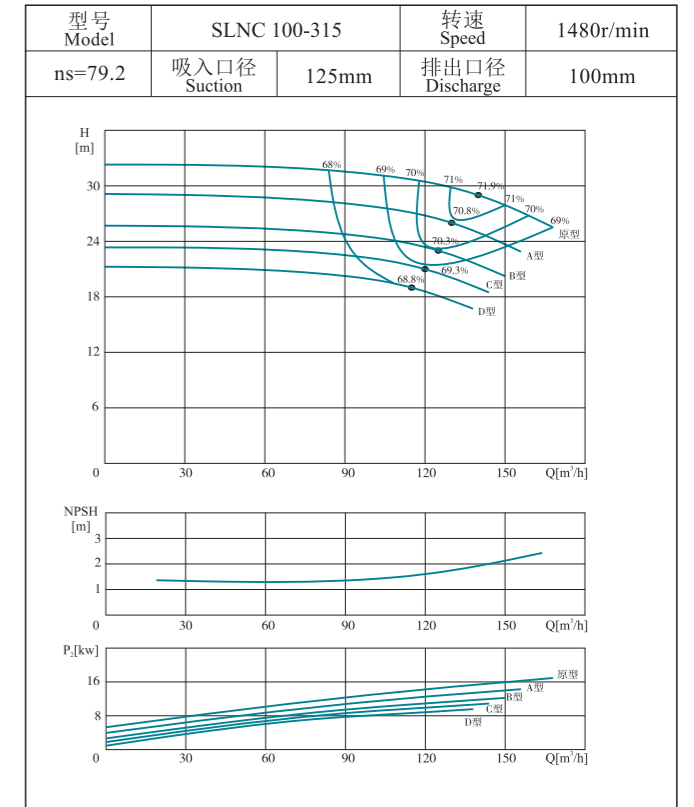
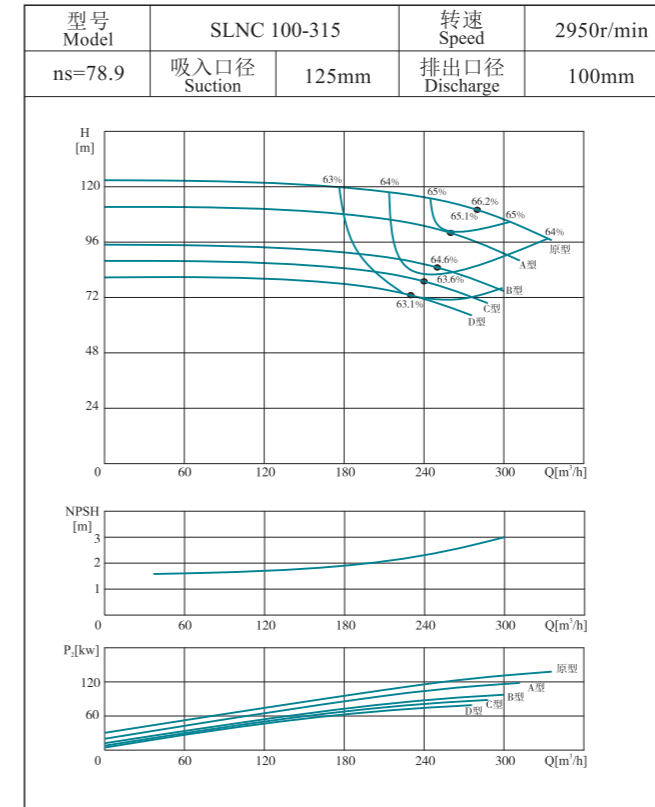






#### 性能曲线图 Performance curve

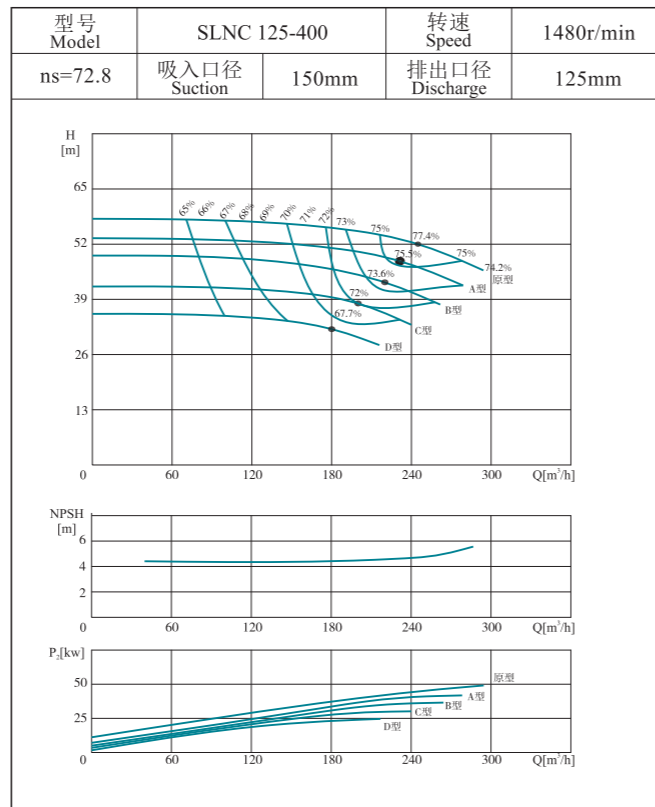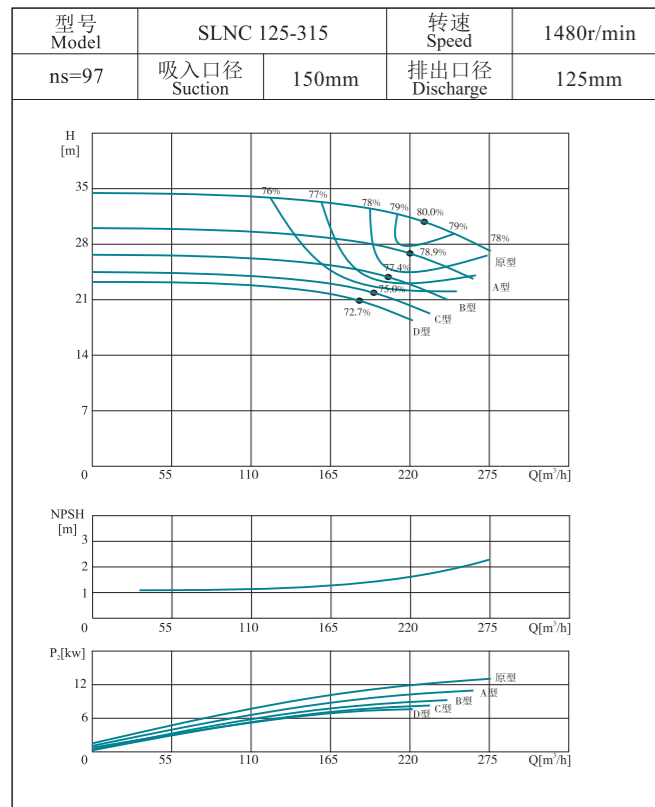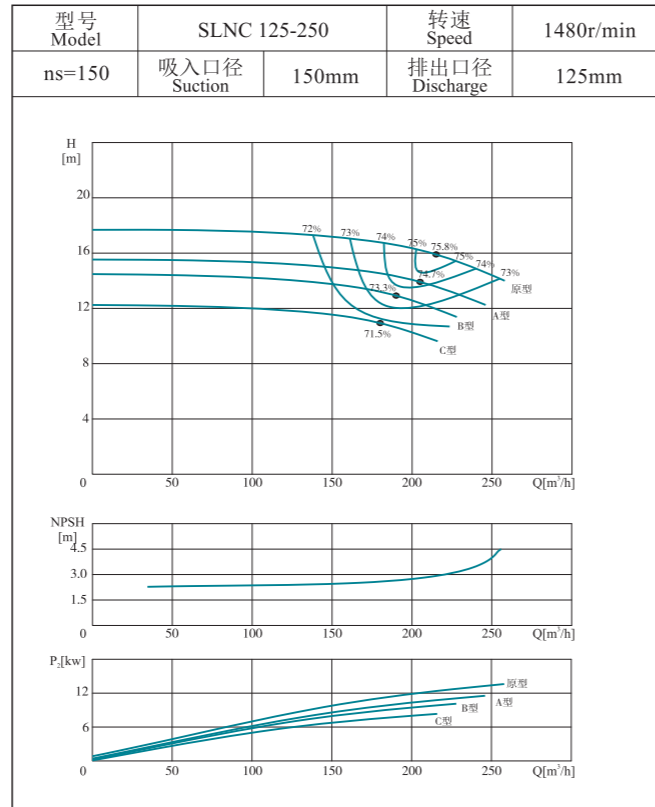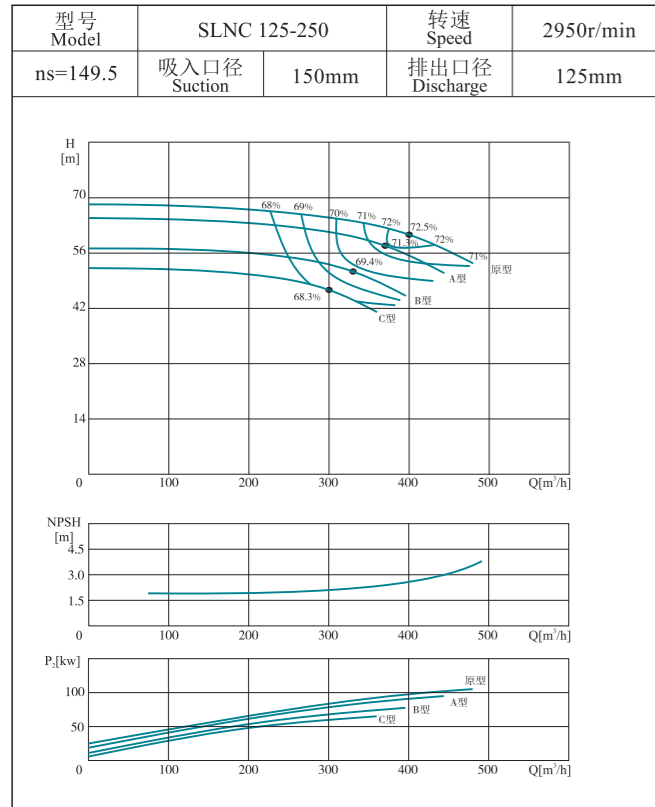







#### 性能曲线图 Performance curve

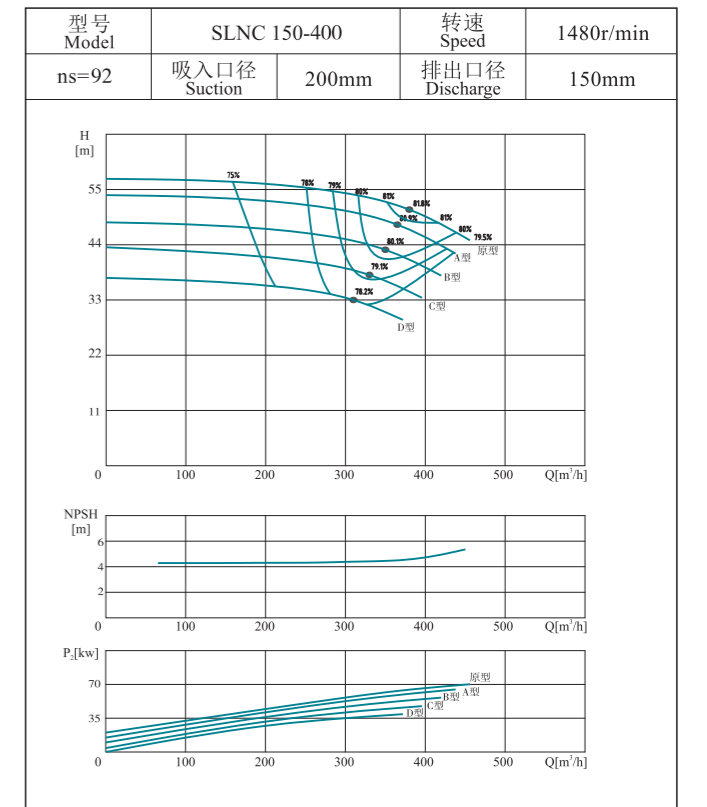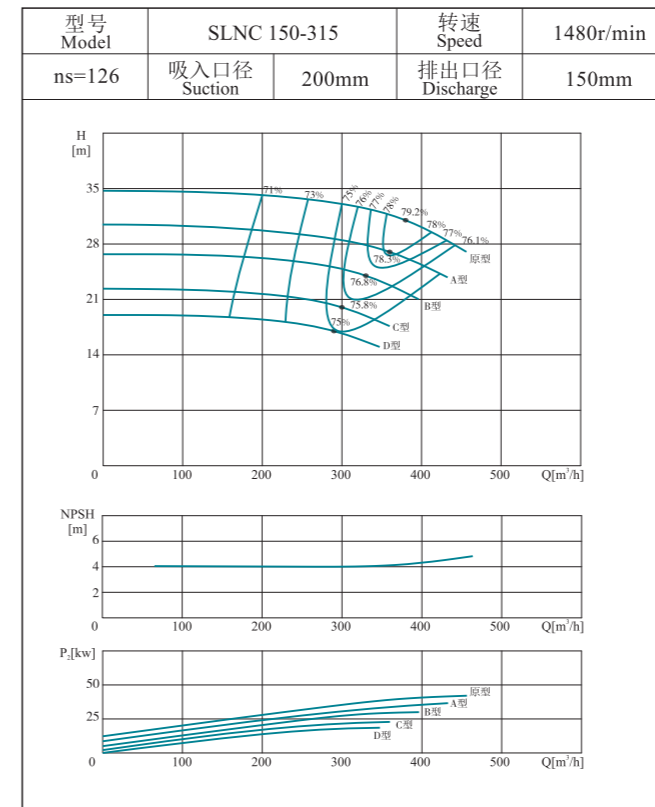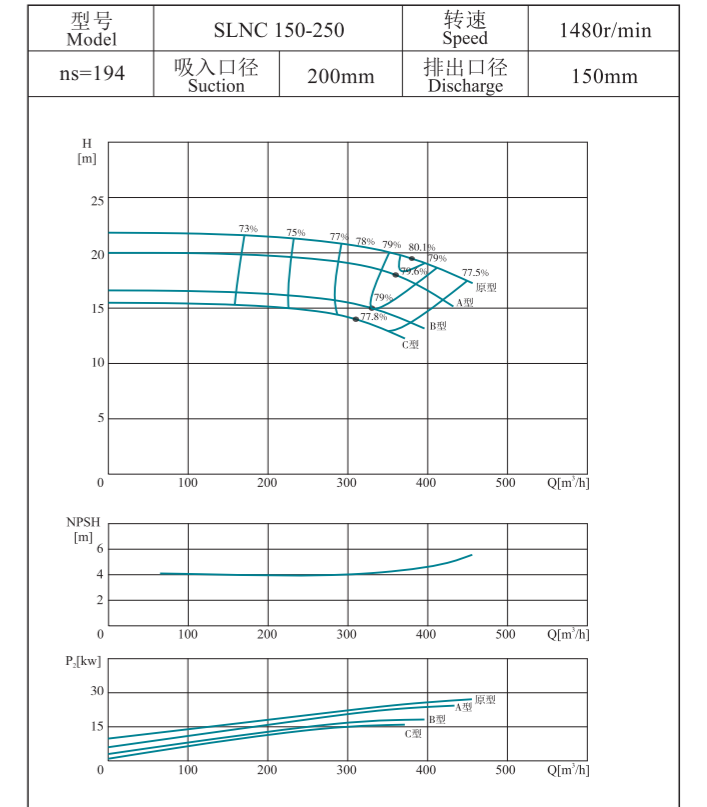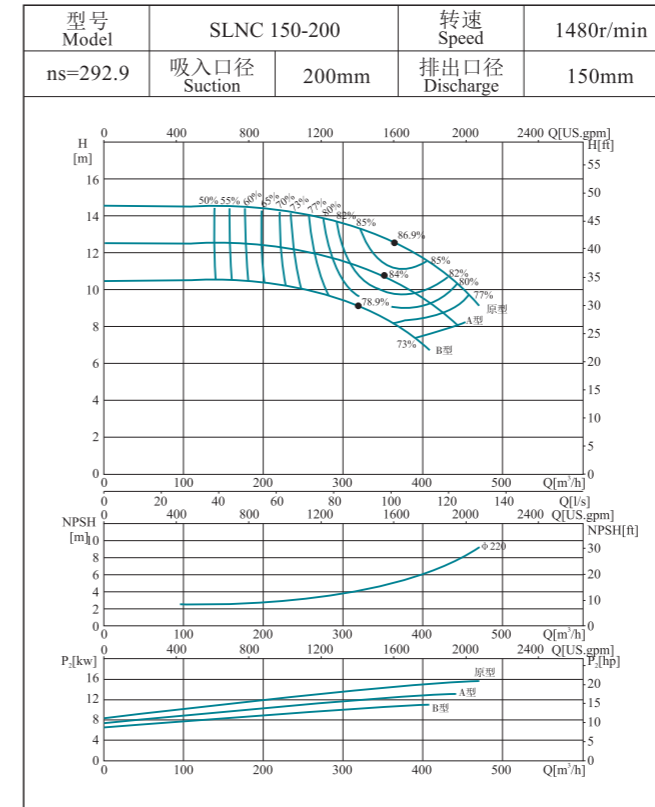



性能曲线图 Performance curve

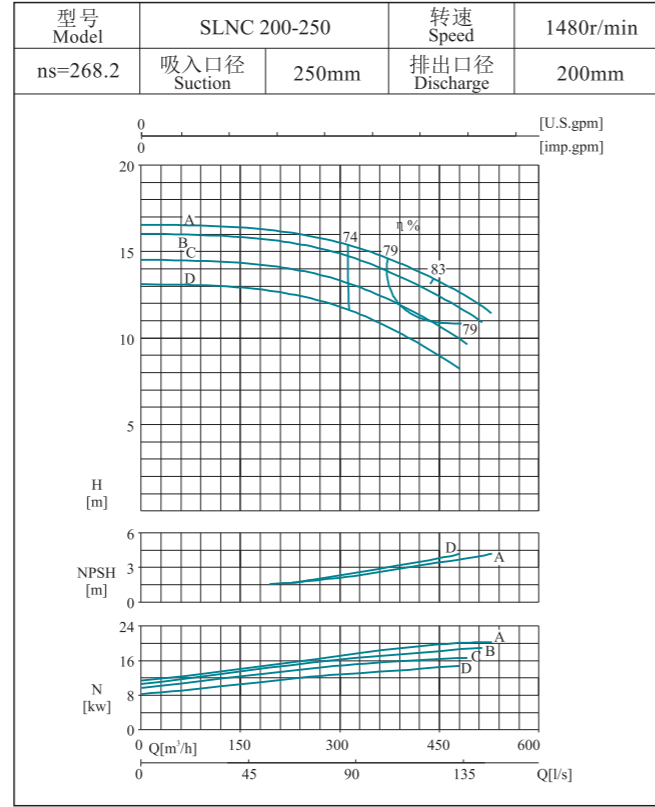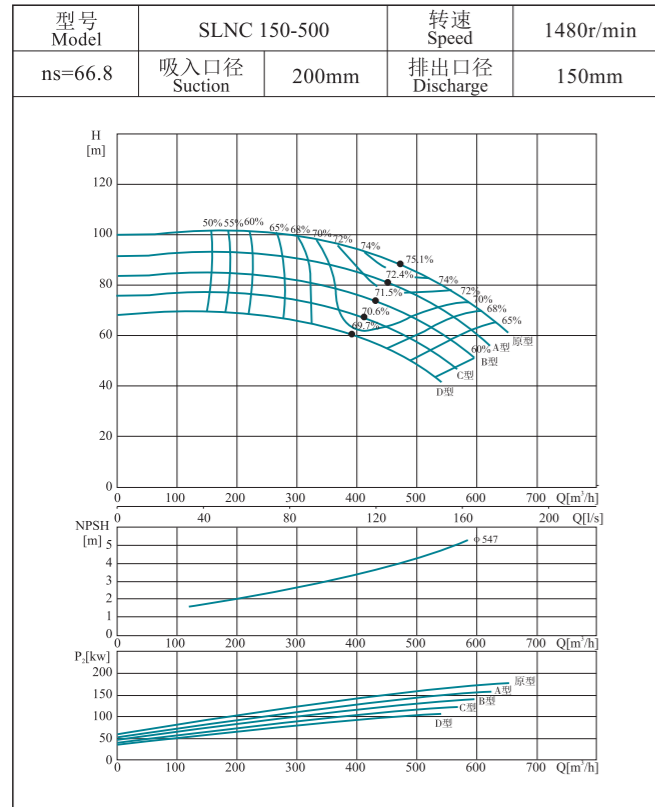




性能曲线图 Performance curve

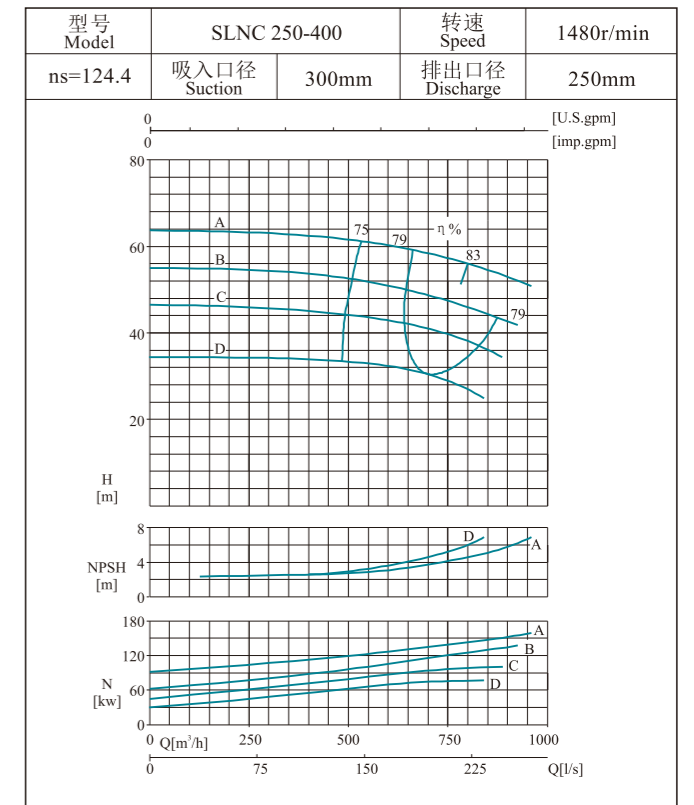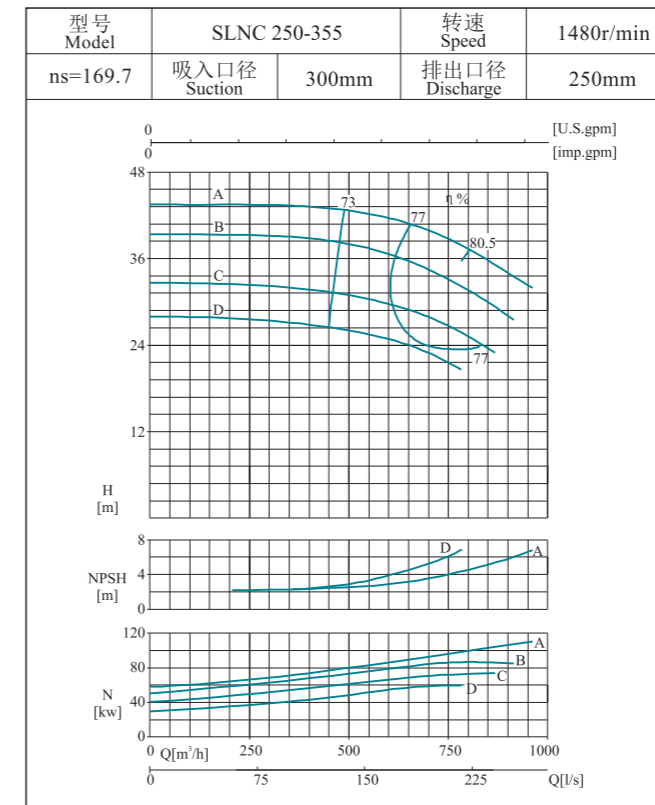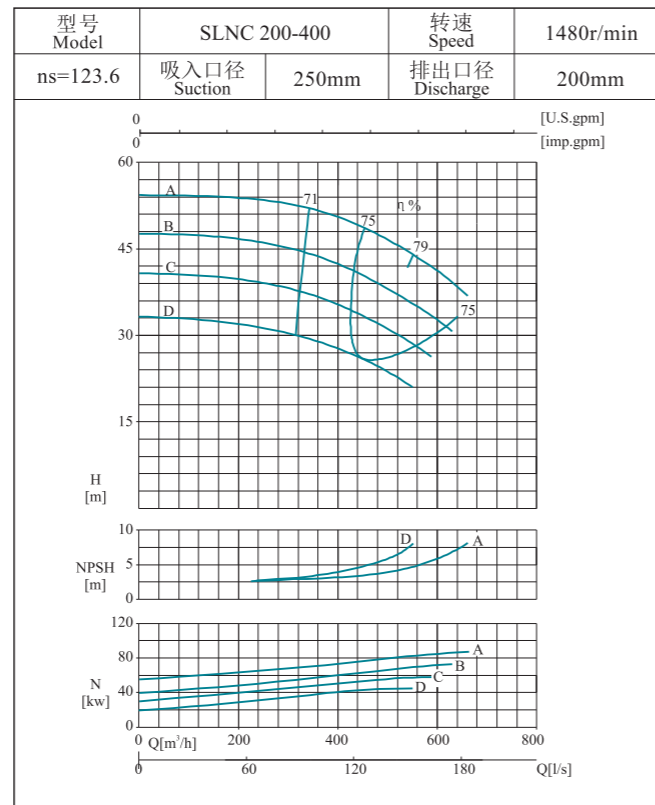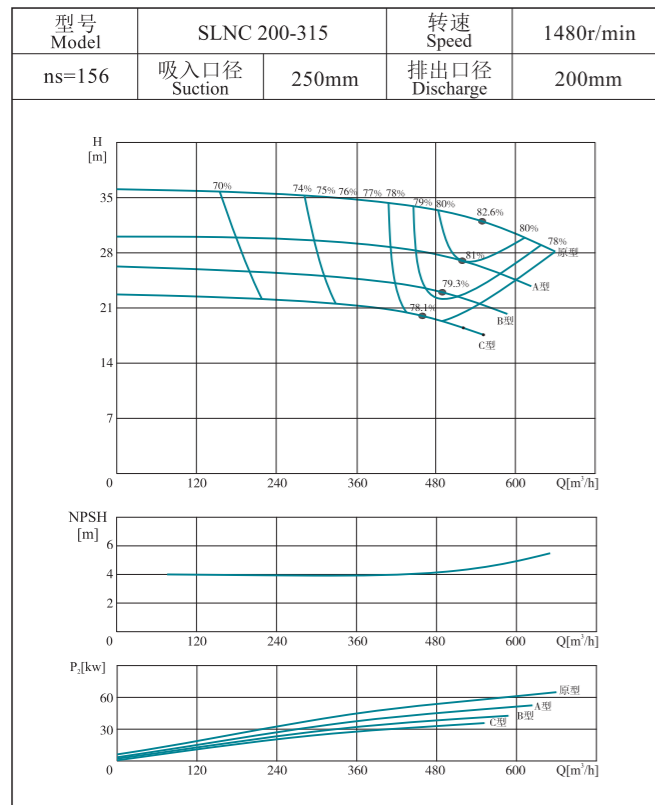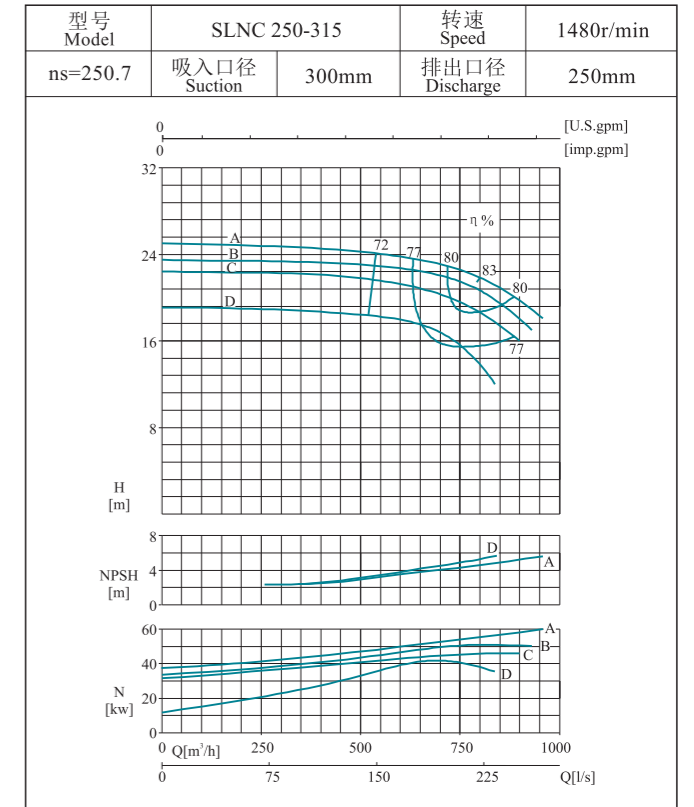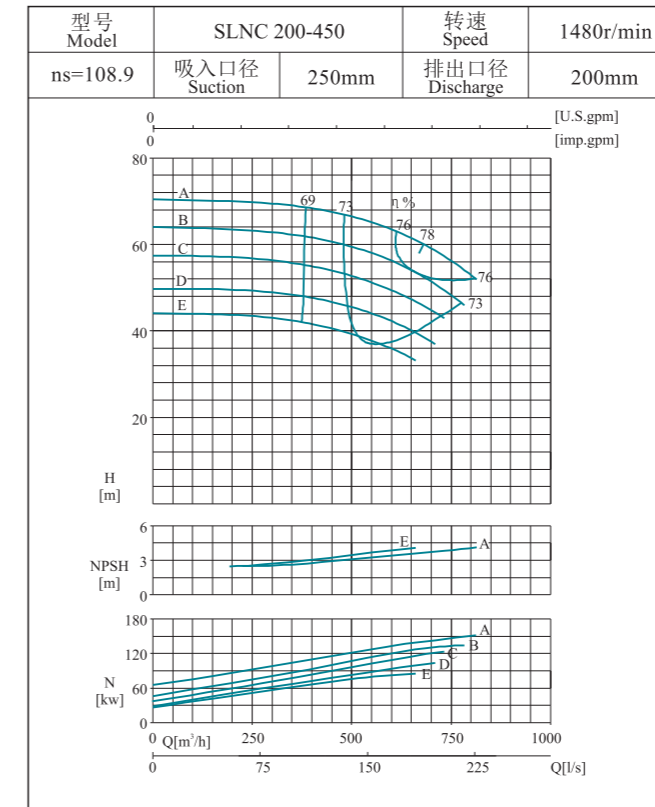

#### 性能曲线图 Performance curve

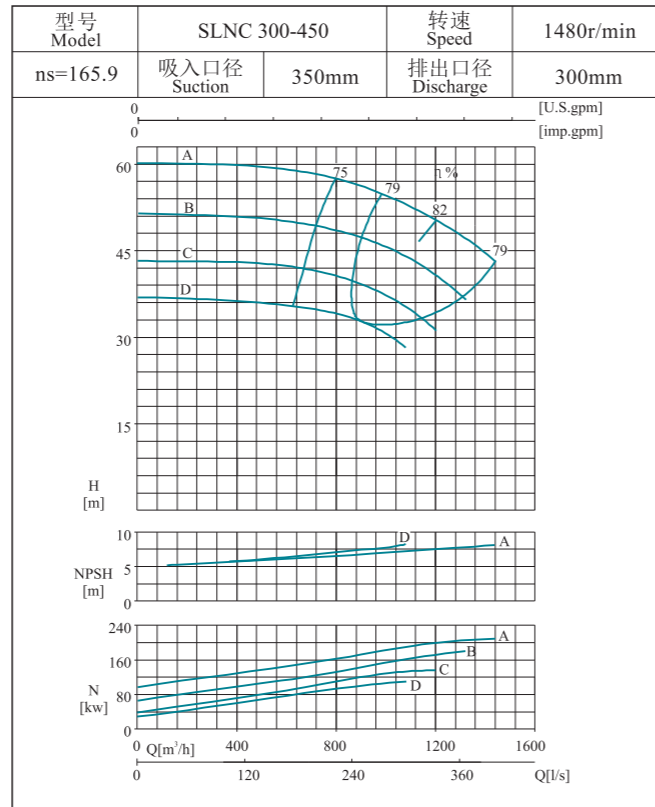
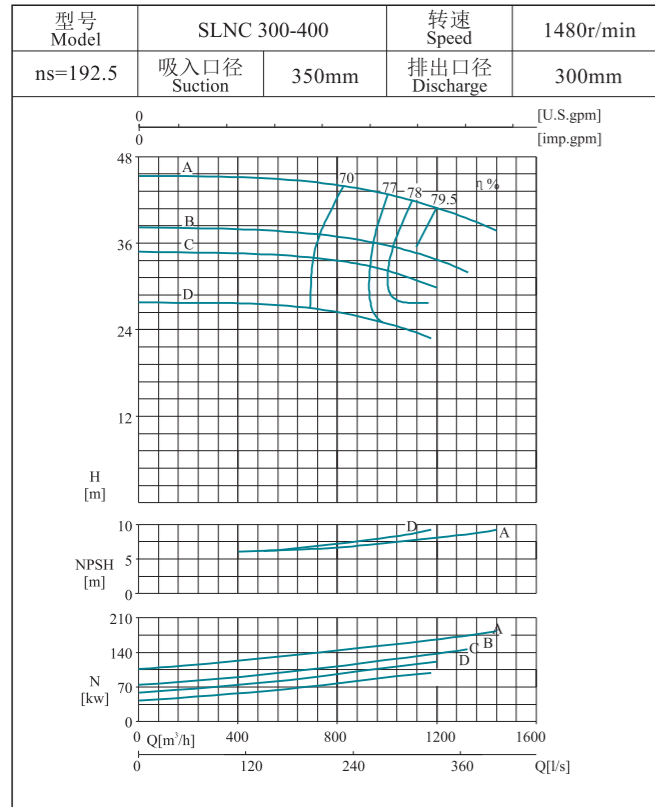


#### 性能曲线图 Performance curve

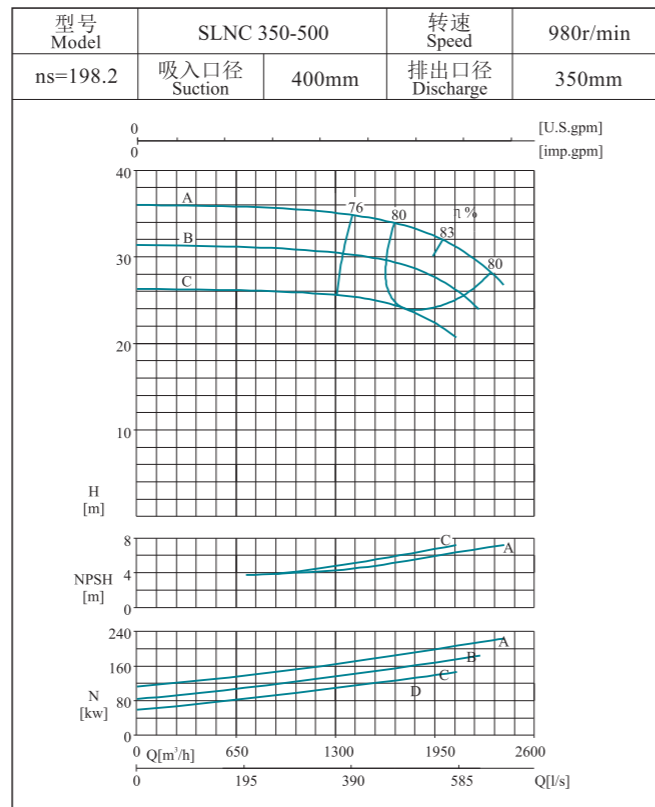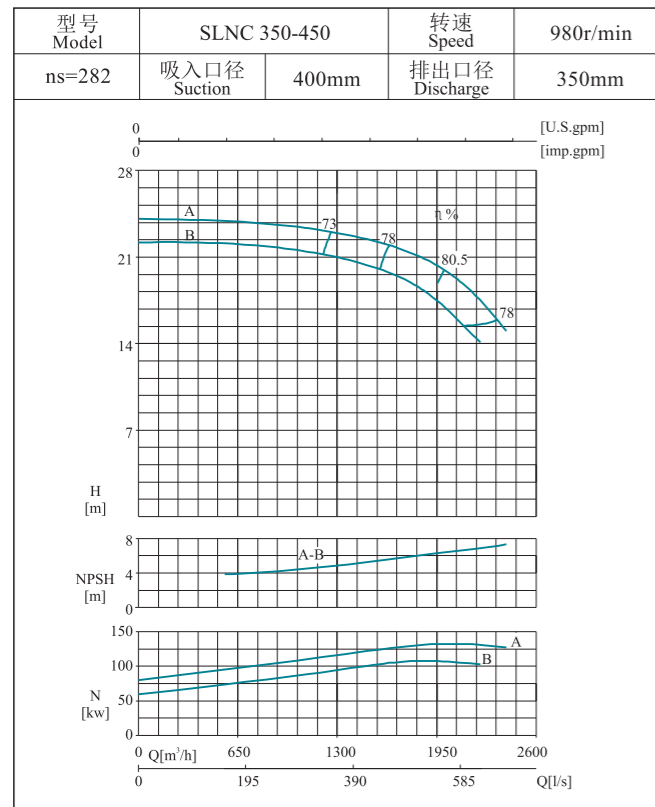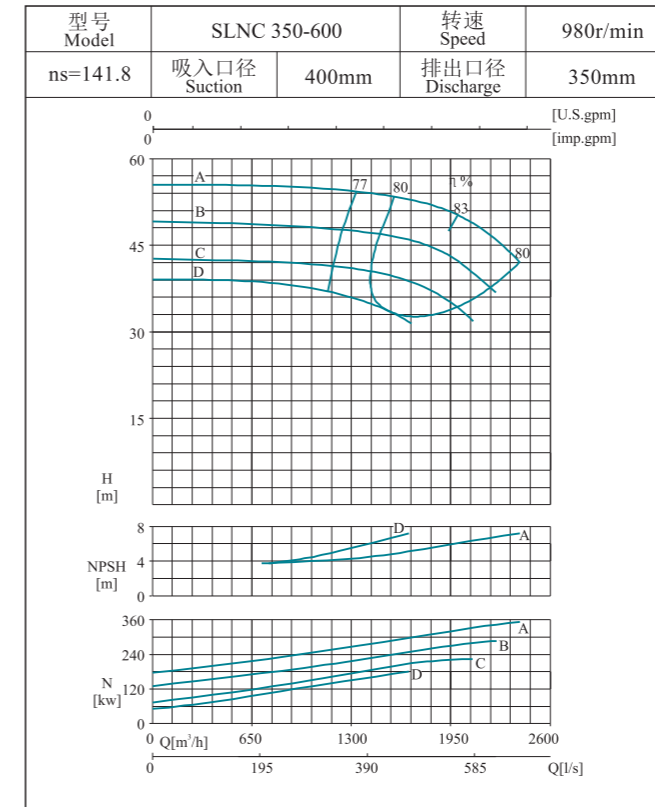



安装尺寸图 Installation dimension drawing

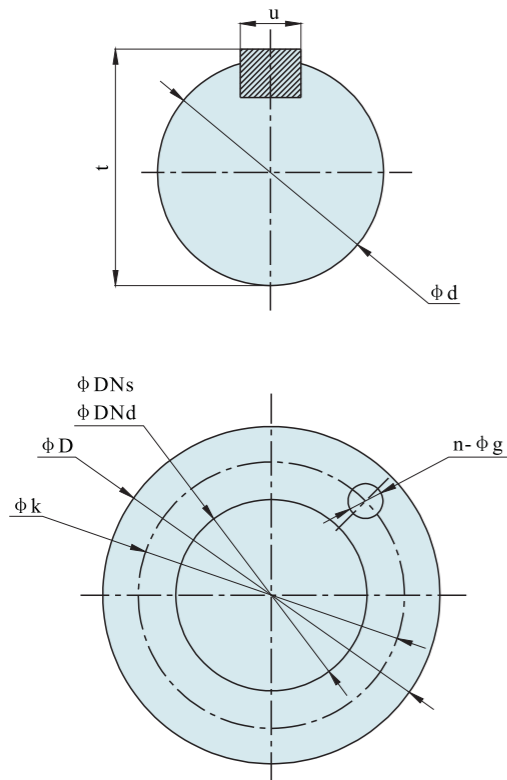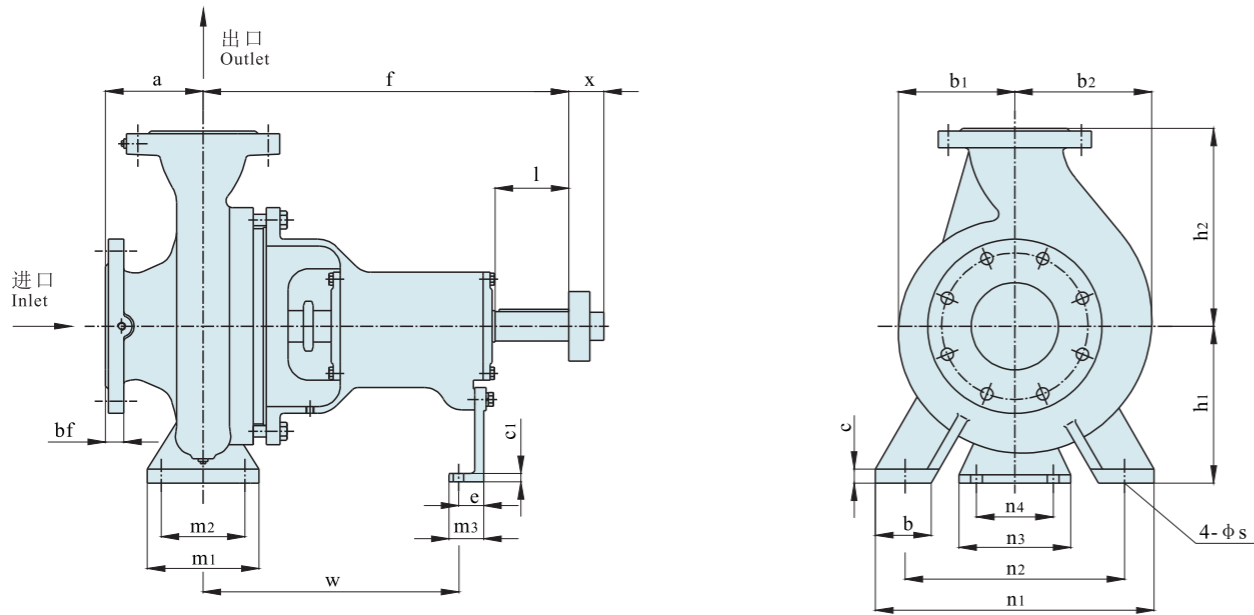

进、出口法兰  
Inlet and outlet flange

法兰尺寸 Flange dimensions					
DNd DNs	D	bf	k	g	n
32	140	18	100	18	4
40	150	18	110	18	4
50	165	20	125	18	4
65	185	20	145	18	4
80	200	22	160	18	8
100	220	24	180	18	8
125	250	26	210	18	8
150	285	26	240	22	8
200	340	26	295	22	8
250	395	28	350	22	12
300	445	28	400	22	12
350	500	28	450	26	16
400	580	32	525	30	16

安装尺寸表 Installation dimension table

泵型号 Pump model	进口口径 DNS Inlet caliber	出口口径 DNd Outlet caliber	泵头部分尺寸 The dimensions of the pump head										底座部分尺寸 Foot part size										配套螺栓 Form a complete set of bolts			电联器 Itu device			轴键尺寸 The shaft key size		
			a	f	b1	b2	h1	h2	b	c	c1	e	m1	m2	m3	n1	n2	n3	n4	w	s	x	d	l	t	u					
SLNC32-125	50	32	80	350	90	100	132	140	50	12	10	42	100	70	70	220	180	160	110	260	M12	50	24	50	27	8					
SLNC32-160	50	32	80	350	105	117	160	170	50	12	10	42	100	70	70	220	180	160	110	260	M12	80	24	50	27	8					
SLNC32-160(I)	50	32	100	350	100	117	132	170	50	15	10	42	100	70	70	250	200	160	110	260	M12	80	24	50	27	8					
SLNC32-200	50	32	80	350	130	138	160	195	50	15	10	42	100	70	70	300	250	160	110	260	M12	110	24	50	27	8					
SLNC32-200(I)	50	32	100	350	135	147	160	230	50	20	10	42	100	70	70	300	250	160	110	260	M12	110	24	50	27	8					
SLNC32-250	50	32	110	470	142	153	180	225	50	15	10	42	100	70	70	320	250	160	110	340	M12	110	32	80	35	10					
SLNC40-125	65	40	80	350	100	108	112	140	50	15	10	42	100	70	70	240	190	160	110	260	M12	60	24	50	27	8					
SLNC40-160	65	40	80	350	114	134	160	170	50	15	10	42	100	70	70	240	190	160	110	260	M12	110	24	50	27	8					
SLNC40-200	65	40	100	470	132	147	160	215	53	20	10	42	100	70	70	305	265	160	110	340	M12	110	32	80	35	10					
SLNC40-250	65	40	110	470	151	164	180	225	65	15	10	42	100	70	70	320	250	160	110	340	M12	110	32	80	35	10					
SLNC40-315	65	40	125	500	185	198	225	275	80	20	10	42	125	95	70	350	290	160	110	332	M12	110	42	110	45	12					
SLNC50-125	65	50	100	350	123	130	132	180	50	15	10	42	100	70	70	240	190	160	110	260	M12	80	24	80	35	10					
SLNC50-160	65	50	110	470	123	130	160	215	50	15	10	42	125	95	70	305	265	160	110	340	M12	110	32	80	35	10					
SLNC50-200	65	50	110	470	133	145	160	215	50	15	10	42	100	70	70	305	265	160	110	340	M12	110	32	80	35	10					
SLNC50-250	65	50	100	470	157	173	200	230	65	18	10	42	125	95	70	320	250	160	110	340	M12	110	32	80	35	10					
SLNC50-315	65	50	125	500	197	213	250	280	100	20	10	42	145	95	70	400	300	160	110	332	M12	140	42	110	45	12					
SLNC65-125	80	65	100	350	110	140	160	190	65	15	10	42	125	95	70	280	212	160	110	260	M16	110	24	50	27	8					
SLNC65-160	80	65	110	470	132	158	160	200	65	15	10	42	125	95	70	280	212	160	110	340	M16	110	32	80	35	10					
SLNC65-200	80	65	110	470	144	168	180	225	65	15	10	42	125	95	70	320	250	160	110	340	M12	110	32	80	35	10					
SLNC65-250	80	65	110	470	169	192	200	250	90	18	10	42	160	120	70	360	280	160	110	340	M16	110	32	80	35	10					
SLNC65-315	80	65	125	500	201	221	225	280	80	25	10	42	160	120	70	400	315	160	110	332	M16	140	42	110	45	12					
SLNC80-160	100	80	125	470	136	170	180	225	65	15	10	42	125	95	70	320	250	160	110	340	M12	110	32	80	35	10					
SLNC80-200	100	80	125	470	161	190	200	280	65	18	10	42	125	95	70	345	280	160	110	340	M12	110	32	80	35	10					
SLNC80-250	100	80	135	500	171	200	200	280	80	18	10	42	160	120	70	400	315	160	110	332	M16	140	42	110	45	12					
SLNC80-315	100	80	140	500	211	235	250	315	80	25	10	42	160	120	70	400	315	160	110	332	M16	140	42	110	45	12					
SLNC80-400	100	80	125	500	246	265	280	355	80	25	10	42	160	120	70	435	355	160	110	332	M16	110	42	110	45	12					

## 安装尺寸表 Installation dimension table

泵型号 Pump model	进口口径 DNs Inlet caliber	出口口径 DNd Outlet caliber	泵头部分尺寸 The dimensions of the pump head						底座部分尺寸 Foot part size										配套螺栓 Form a complete set of bolts	电联器 Itu device	轴键尺寸 The shaft key size					
			a	f	b1	b2	h1	h2	b	c	c1	e	m1	m2	m3	n1	n2	n3			n4	w	s	x	d	l
SLNC100-160	125	100	125	470	165	203	200	280	80	18	10	42	160	120	70	360	280	160	110	340	M16	110	32	80	35	10
SLNC100-200	125	100	140	500	171	208	200	280	80	18	10	42	160	120	70	360	280	160	110	332	M16	110	42	100	45	12
SLNC100-250	125	100	140	500	192	225	225	300	80	18	10	42	160	120	70	400	315	160	110	332	M16	140	42	110	45	12
SLNC100-315	125	100	140	640	222	253	250	335	100	25	10	42	160	120	70	400	315	160	110	460	M20	140	48	110	54	14
SLNC100-400	125	100	140	500	246	273	280	400	100	25	10	42	200	150	70	500	400	160	110	332	M20	140	42	110	45	12
SLNC125-200	150	125	140	640	220	255	250	355	100	25	10	42	180	130	70	550	450	160	110	460	M20	140	32	80	35	10
SLNC125-250	150	125	140	640	198	249	250	355	100	25	10	42	200	150	70	550	450	160	110	460	M20	140	48	110	54	14
SLNC125-315	150	125	140	500	229	269	280	355	100	30	10	42	320	230	70	730	590	280	230	332	M24	110	60	105	64	18
SLNC125-400	150	125	140	500	255	288	315	400	100	30	10	42	200	150	70	500	400	160	110	332	M20	140	42	110	45	12
SLNC150-200	200	150	160	470	264	283	315	400	100	27	10	42	200	150	70	500	400	160	110	340	M20	110	42	110	45	12
SLNC150-250	200	150	160	500	228	288	280	380	100	30	10	42	200	150	70	500	400	160	110	332	M20	110	42	110	45	12
SLNC150-315	200	150	160	640	253	306	280	400	100	27	10	42	200	150	70	550	450	160	110	460	M20	140	48	110	54	14
SLNC150-400	200	150	160	640	275	320	315	450	100	27	10	42	200	150	70	550	450	160	110	460	M20	140	48	110	54	14
SLNC150-500	200	150	200	750	330	372	390	525	120	30	12	47	250	160	80	680	580	200	150	545	M24	170	60	105	64	18
SLNC200-250	250	200	180	470	262	330	355	425	80	25	10	42	160	120	70	400	315	160	110	340	M16	110	32	80	35	10
SLNC200-315	250	200	200	640	275	337	355	450	100	30	10	42	240	180	70	650	550	160	110	460	M20	140	48	110	54	14
SLNC200-400	250	200	200	640	295	350	355	480	100	30	10	42	320	230	70	650	550	160	110	460	M24	170	48	110	54	14
SLNC200-450	250	200	200	750	315	370	390	510	100	35	12	47	320	230	80	680	580	200	150	545	M24	170	60	105	64	18
SLNC250-315	300	250	290	640	283	363	350	455	105	30	10	47	260	190	80	650	550	160	110	460	M24	140	48	110	54	14
SLNC250-355	300	250	290	750	360	450	475	625	160	40	12	47	330	230	80	740	600	200	150	545	M24	170	60	105	64	18
SLNC250-400	300	250	290	750	328	393	400	600	120	40	12	47	265	180	80	710	580	200	150	545	M24	170	60	105	64	18
SLNC300-400	350	300	285	750	341	425	430	625	150	40	12	47	265	180	80	740	580	200	150	545	M24	170	60	105	64	18
SLNC300-450	350	300	285	750	349	428	430	650	150	40	12	47	320	230	80	740	590	200	150	545	M24	170	60	105	64	18
SLNC350-450	400	350	300	750	420	525	675	850	160	38	12	47	330	230	80	730	590	200	150	545	M24	170	60	105	64	18
SLNC350-500	400	350	300	820	435	540	685	850	160	40	18	70	330	240	100	740	600	290	240	460	M24	170	75	105	79	20
SLNC350-600	400	350	300	820	450	555	700	850	160	40	18	70	330	240	100	740	600	290	240	460	M24	210	75	105	79	20

## 服务网络

连成在全国各大、中城市设有350多个分支机构，并建立了销售服务网络，拥有一支庞大的销售服务队伍。

## Service Network

With a strong team of sales promotion and after-sales-service, Liancheng established more than 350 nation wide branches in various large and middle.

## 服务项目

- 技术培训
- 安装调试
- 维护修理保养
- 设备评估
- 故障处理
- 设备升级改进

## Service Items

- Technical training
- Equipment evaluation
- Installation and adjustment
- Trouble-shooting
- Maintenance and repairing
- The modification & improvement of equipment

## 服务承诺

- 合同签约后，在安装期间本公司将派人无偿到现场协助安装及调试；
- 如您按说明书正确使用上海连成牌水泵能确保您使用满意，万一发生异常情况，即请拨打服务热线，我们将为您提供优质的售后服务，给予你满意的答复；
- 产品保修期为一年，一年之内如产品出现质量问题，本公司将实行三包；一年以后出现产品质量问题，本公司提供无偿的技术服务，需方单位自购零配件；
- 产品售出后，本公司将终生与客户保持联系，听取使用意见，以便使产品质量更加完善；
- 本公司将定期与定购单位保持联系，定期回访，以确保定购单位使用的设备运行处于良好状态。

## Service Promise

After signing the contract, technical persons will be dispatched to the instant site to help install and adjust equipment, which is free of charge.

In case the equipment is manipulated in accordance with instruction of tech manual, Shanghai Liancheng will guarantee the products. If something abnormal occurred, please contact us. Shanghai Liancheng will provide consider. Within the warrant period of 1 year, if products have quality problems, Liancheng will provide charge-free services.

After warrant period, if quality problems occur, will provide the charge-free technical support, the components and parts should be bought by customers.

After the products are purchased, Shanghai Liancheng will keep lifelong contact with the customers, listening comments from customers so as to Improve quality in pump performance.

Shanghai Liancheng will keep regular contact with ordering companies so as to have pump running in proper order.

**境内售后服务请与我公司当地售后联系或总部：021-59136786**

For the domestic post-sale service, please contact the local post-sale service and the headquarter: 021-59136786

**境外销售和售后服务请联系：+86 21 59136780**

For the abroad sale and post-sale service, please contact: +86 21 59136780

驻外机构：\_\_\_\_\_

Agency : \_\_\_\_\_